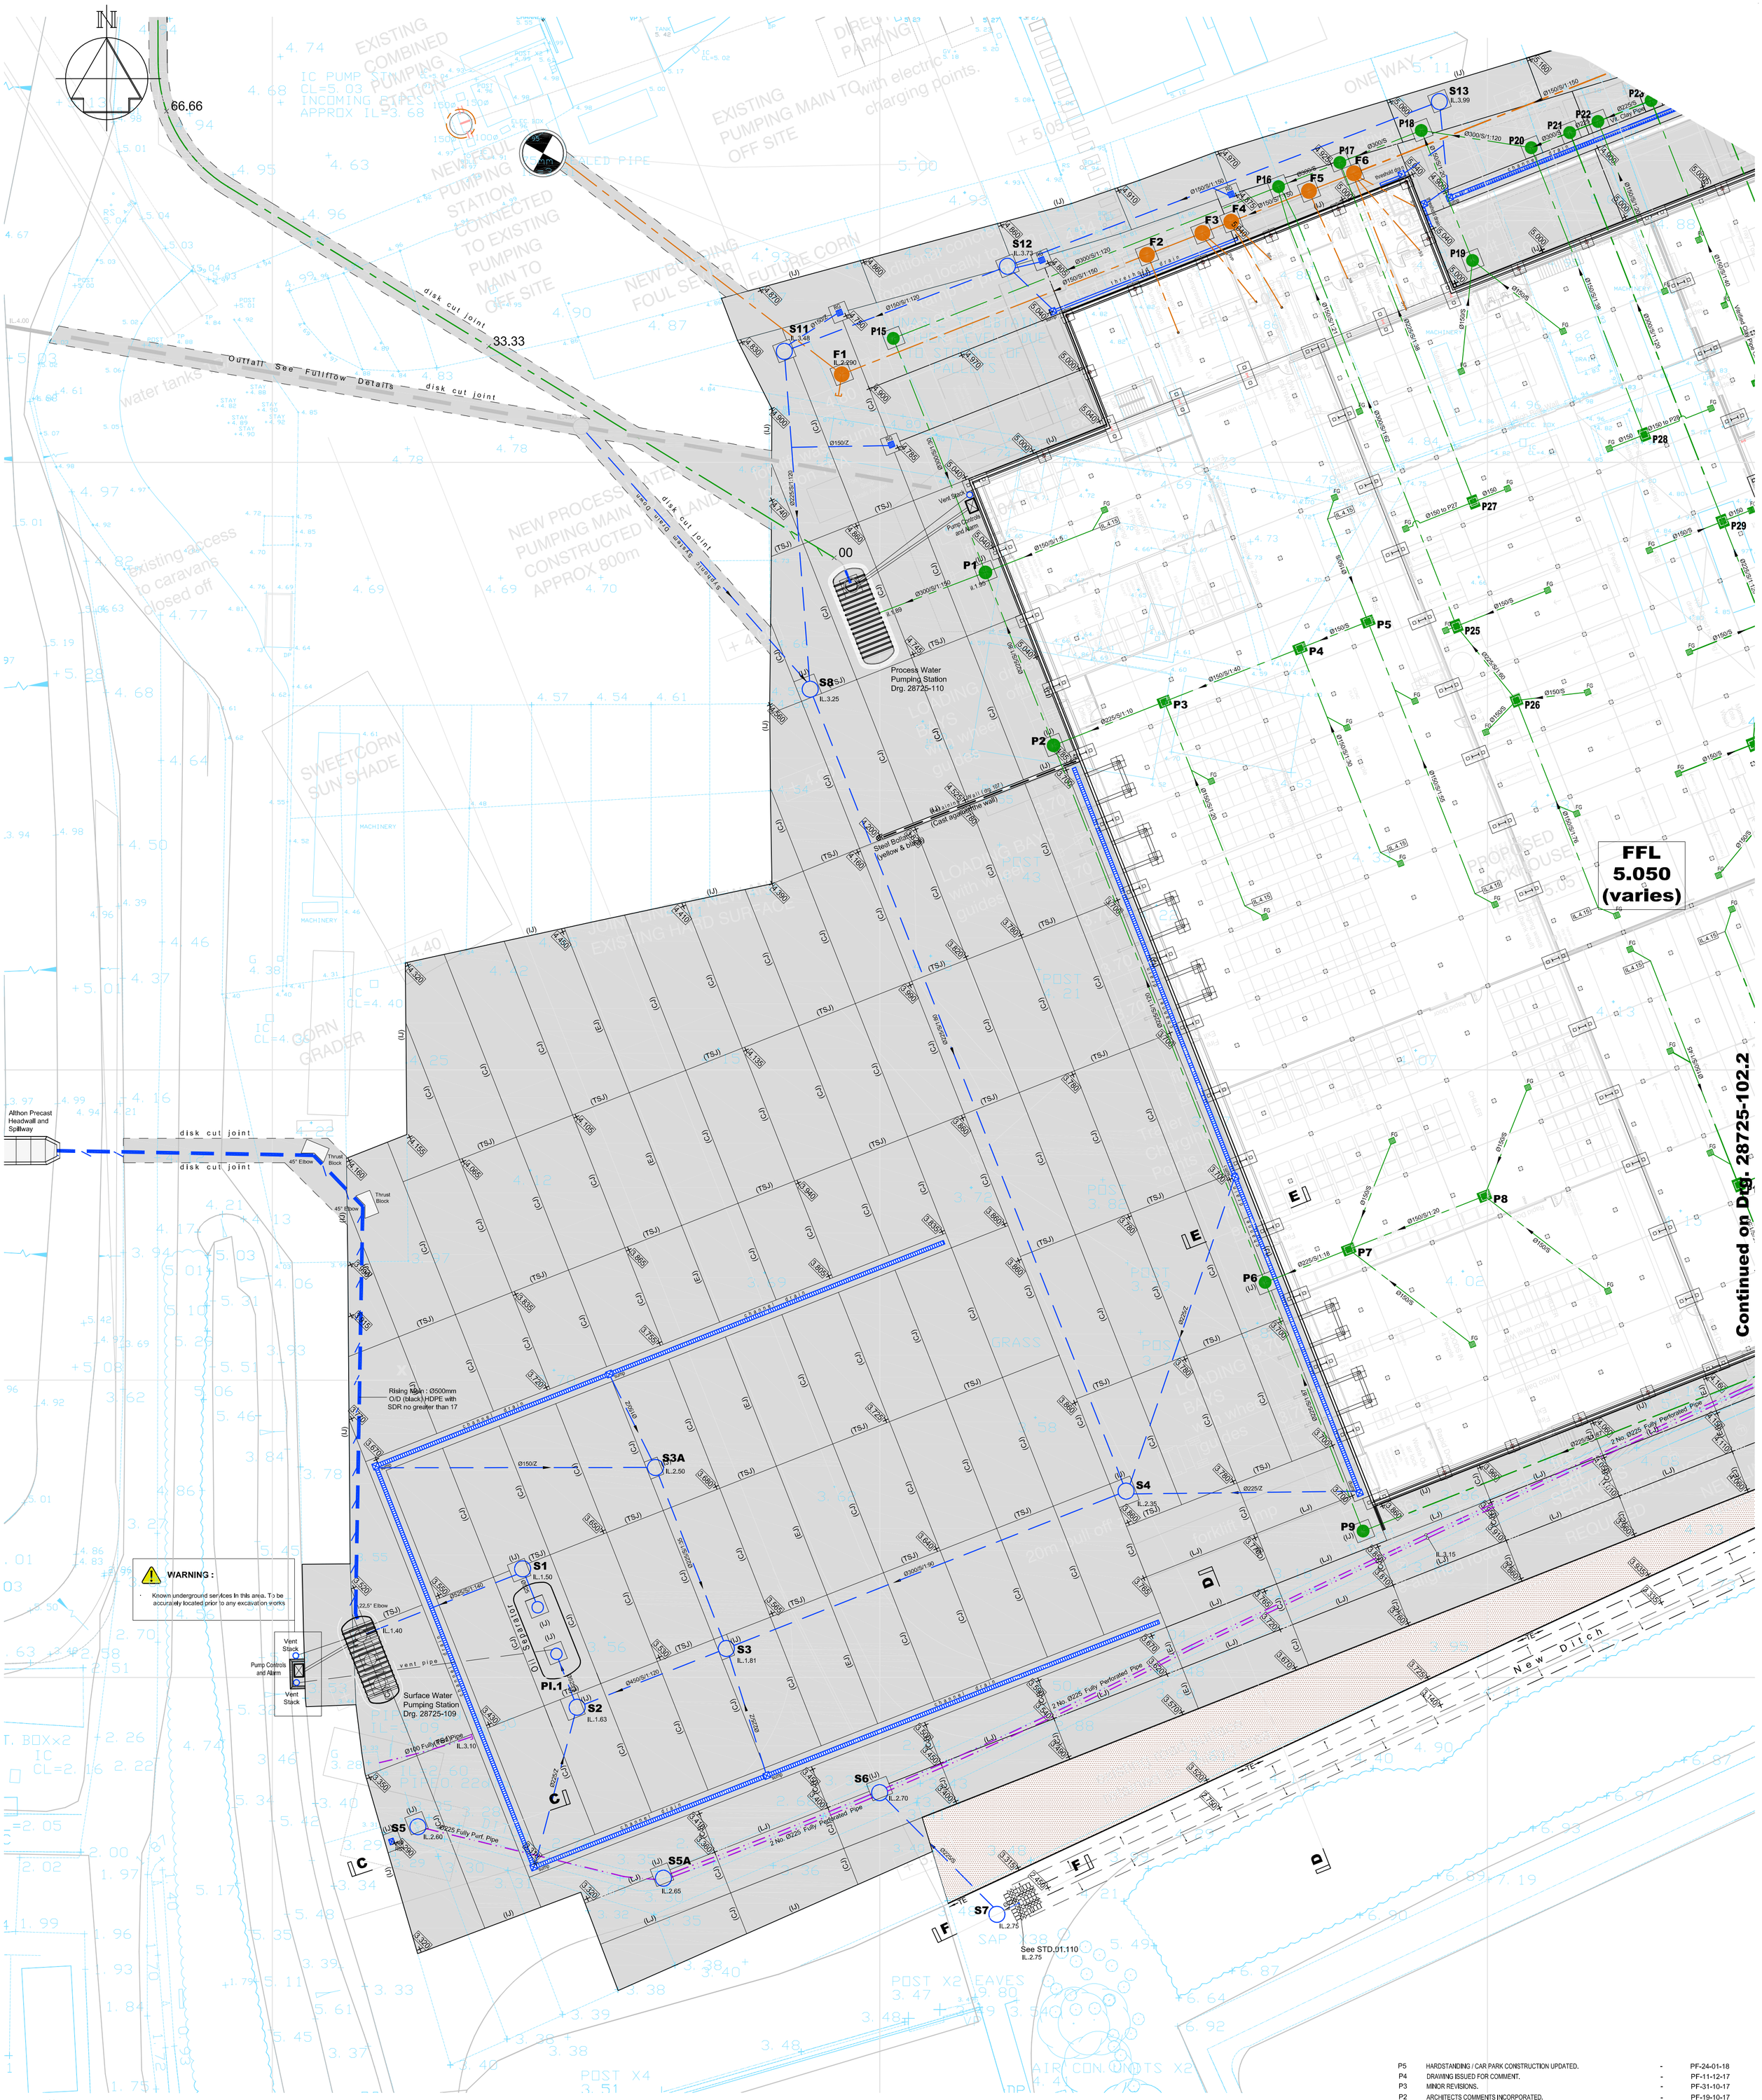


Notes

1. This drawing to be read in conjunction with all relevant Architects and Engineers drawings and specifications.
2. Dimensions are in millimetres unless noted otherwise.
3. Original topographic survey undertaken by Shaw Colegate.
 For full topographic survey information see Shaw Colegate drawing No. 10417-TP
 All levels based on Ordnance Survey by GPS.
4. Existing levels shown thus: +6.77
5. Before excavation commences, the Contractor shall ascertain the depths, sizes and locations of all services to be crossed. Any conflicts in levels between new works and existing services shall be notified to the Engineer.
6. Edgings are shown thus :
 - TE - Flush Face Timber Edging : See Sections
 - PC - 50 x 150mm Precast Concrete Edging
7. Finishes Schedule : (See also Sections)

 All formations shall be inspected and any soft or deleterious material shall be excavated and replaced with well compacted Class 6F4 / 6F5 material.
 The resultant formation shall be proof rolled.

 CONCRETE APRON / ROADS
 Construction : 200mm C40 Pavement Quality Concrete
 C385 Mesh Reinforcement (60mm Cover)
 - 1000 Gauge Polythene Membrane
 250mm Type 1 Sub Base
 150mm 6F4 / 6F5 capping fill
 - Triax Tx160 Geogrid by Tensar, or equivalent
 - Trimmed and compacted formation

 600mm minimum Total
 Anticipated formation : Soft to firm gravelly, sandy SILT, and soft to firm sandy, gravelly CLAY

 Concrete Bay Joint Types :
 (IJ) - Isolation Joint
 (CJ) - Contraction Joint
 (TSJ) - Tied Sawn Joint

 The general joint layout is provisional and subject to Contractor appointment and further consultation

 CONCRETE BLOCK PAVED FOOTWAY
 Construction : See Standard Detail STD.02.35 Type 3 over, 6F4/6F5 Capping : where required

 HARDSTANDING / CAR PARK
 Construction : 20mm Shingle Dressing (to match existing)
 Type 1 Sub Base Blinding
 200mm 6F5 (coarse) Track Ballast
 Terram 1000 (or equivalent) Geotextile
 } B & M Plant Hire detail

REV	DESCRIPTION	CHECKED	DATE
P5	HARDSTANDING / CAR PARK CONSTRUCTION UPDATED.	-	PF-24-01-18
P4	DRAWING ISSUED FOR COMMENT.	-	PF-11-12-17
P3	MINOR REVISIONS.	-	PF-31-10-17
P2	ARCHITECTS COMMENTS INCORPORATED.	-	PF-19-10-17

Archibald Shaw
Consulting Civil & Structural Engineers
One Little London Chichester West Sussex PO19 1PP
Telephone: 01243 786471 Facsimile: 01243 779346
mail@archibaldshaw.co.uk www.archibaldshaw.co.uk

CLIENT
Barfoots of Botley

PROJECT
New Packhouse
Sefter Farm, Pagham
Surfacing (Sheet 1 of 2)

DRAWN BY	CHECKED BY	DESIGNED BY
PF	VC	PF
SCALE @ A1	© DATE	STATUS
1:250	Oct. 2017	Preliminary
JOB NO.	DRAWING NO.	REVISION
28725	102.1	P5