


ITEM DETAIL SHEET

1 x 1 Complete New Flush Casement Window (Standard)

Customer	Scruton	Quote Ref.	L15195 / Q2	Item No	3	Sheet	1 of 1
----------	---------	------------	-------------	---------	---	-------	--------

Diagram

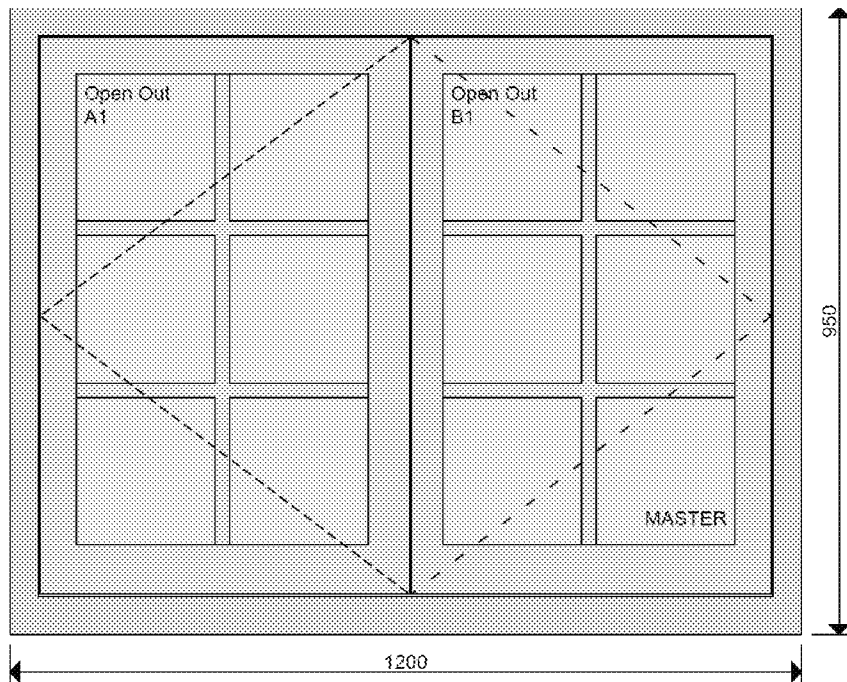

Company Details



Wandsworth Sash Windows
Unit 2, Kangley Business Centre,
Kangley Bridge Road, SE26 5AQ

Sales Manager: Matt King

Flush casement window, Opening out, Viewed internally

Location

First Floor Front W1

Material	Solid Redwood sashes, Solid Redwood frame, Solid Utile Hardwood cill	Quantity	1 of shown on drawing
----------	---	----------	--------------------------

Ironmongery	4 x 76mm Stainless Steel Hinge - Polished Brass 1 x Shepherd's Crook Fastener - Antique Black 2 x Shepherd's Crook Stay - Antique Black	Glazing	Internal Pane	Spacer	External Pane
		Case	4mm Clear Pilkington K Toughened	16mm	4mm Clear Toughened

Ovolo Bead White Tape, White Warm Edge Spacer Argon Filled

Paint Finish

Internal Teknos Spray Finish Farrow & Ball Wimbourne White
External Teknos Spray Finish Farrow & Ball Wimbourne White

Customer Notes

Installation Notes

Installed: Internally

Quote Tracking

Print date: 03-09-2021

Last modified by: Matt King

Last modified date: 26-05-2021