


ITEM DETAIL SHEET

1 x 1 Complete New Flush Casement Window (Standard)

Customer Scruton	Quote Ref. L15195 / Q2	Item No 1	Sheet 1 of 1
----------------------------	----------------------------------	---------------------	------------------------

Diagram

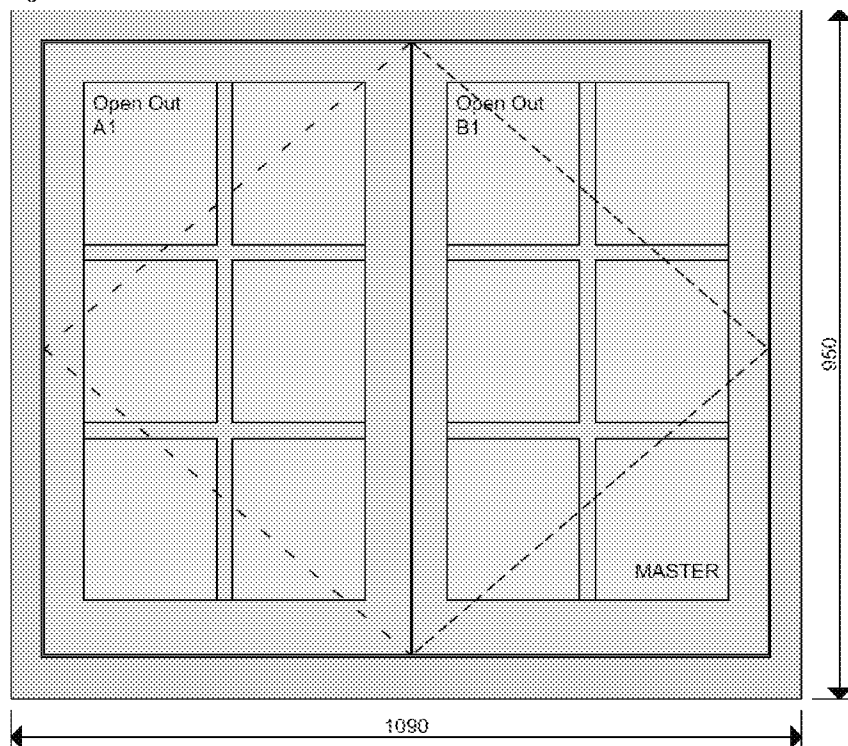

Flush casement window, Opening out, Viewed internally

Company Details



Wandsworth Sash Windows
Unit 2, Kangley Business Centre,
Kangley Bridge Road, SE26 5AQ

Sales Manager: Matt King

Location

Ground Floor Front W2

Material Solid Redwood sashes, Solid Redwood frame, Solid Utile Hardwood cill	Quantity 1 of shown on drawing
---	---

Ironmongery 4 x 76mm Stainless Steel Hinge - Polished Brass 1 x Shepherd's Crook Fastener - Antique Black 2 x Shepherd's Crook Stay - Antique Black	Glazing Internal Pane Case 4mm Clear Pilkington K Toughened 16mm 4mm Clear Toughened	Spacer External Pane
--	--	-------------------------

Ovolo Bead White Tape, White Warm Edge Spacer Argon Filled

Paint Finish

Internal Teknos Spray Finish Farrow & Ball Wimbourne White
External Teknos Spray Finish Farrow & Ball Wimbourne White

Customer Notes

Installation Notes

Installed: Internally

Quote Tracking

Print date: 03-09-2021

Last modified by: Matt King

Last modified date: 26-05-2021