



SCHEDULE

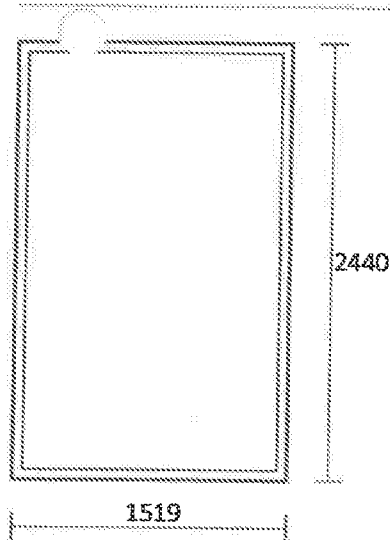


Item 1 North El. GF EntranceHall sidelight
 No. Units: 2
 Type: fixed casement profile window
 Width: 1519 Height: 2440
 Glazing: Double glazed with low E glass
 Material: pine, finger-jointed
 Colour: External: RALTBC Internal: RALTBC
 Handle:
 U-Values: Glass 1.27 Window: 1.4

Notes: External view. Timber to match door. Glass is stopsol grey, lam/tough, as per design. Height to match door. Sits either sides of EntranceHall Door.

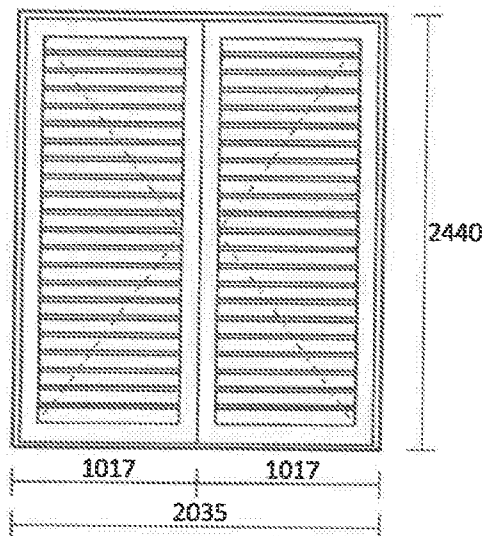


Item 2 North El. GF EntranceHall
 No. Units: 1
 Type: entrance - inward door
 Width: 2035 Height: 2440
 Glazing: Solid
 Material: pine, finger-jointed
 Colour: External: RALTBC Internal: RALTBC
 Handle: Mila Prosecure Lockable Silver
 U-Values: Glass Window: 1

Notes: External view. Timber only door. Door maximum height is 2440mm. Wesser threshold.

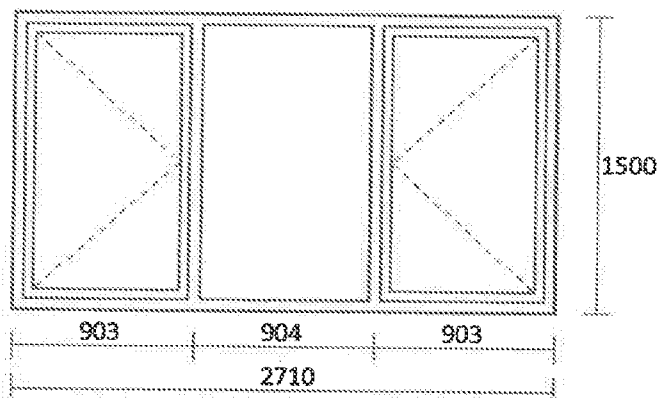


Item 3 North El. GF Bed2
 No. Units: 1
 Type: side hung alu-clad window
 Width: 2710 Height: 1500
 Glazing: Double glazed with low E glass
 Material: pine, fingerjointed
 Colour: External: RALTBC Internal: RALTBC
 Handle: Hoppe Lockable Silver
 U-Values: Glass 1.14 Window: 1.29

Notes: External view. Glass is tough/tough. Packer for sill. Marine grade finish. 2 Grey trickle vents included.

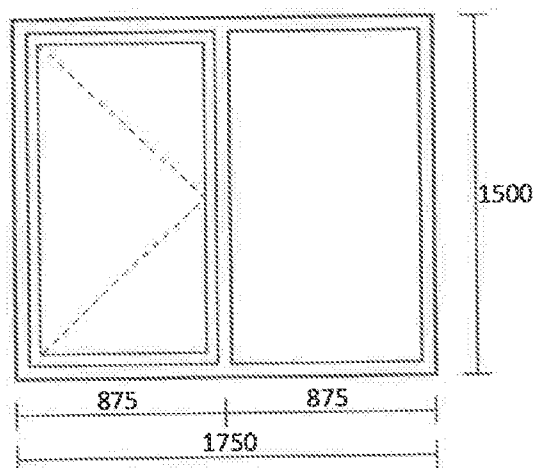


Item 4 North El. FF Kitchen left
 No. Units: 1
 Type: side hung alu-clad window
 Width: 1750 Height: 1500
 Glazing: Double glazed with low E glass
 Material: pine, finger-jointed
 Colour: External: RALTBC Internal: RALTBC
 Handle: Hoppe Lockable Silver
 U-Values: Glass 1.14 Window: 1.29

Notes: External view. Glass is tough/tough. Packer for sill. Marine grade finish. 1 Grey trickle vent included.

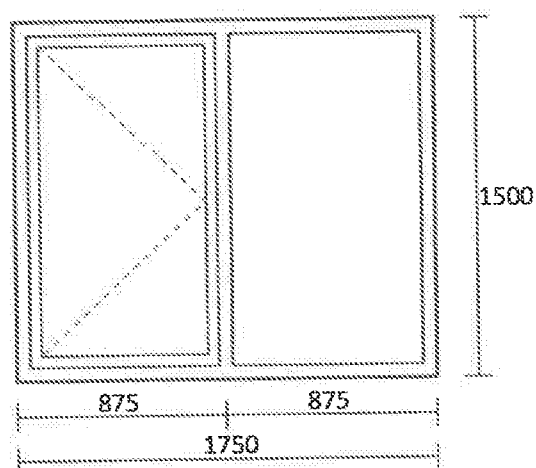


Item 5 North El. FF Kitchen right
 No. Units: 1
 Type: side hung alu-clad window
 Width: 1750 Height: 1500
 Glazing: Double glazed with low E glass
 Material: pine, finger-jointed
 Colour: External: RALTBC Internal: RALTBC
 Handle: Hoppe Lockable Silver
 U-Values: Glass 1.14 Window: 1.29

Notes: External view. Glass is tough/tough. Packer for sill. Marine grade finish. 1 Grey trickle vent included.

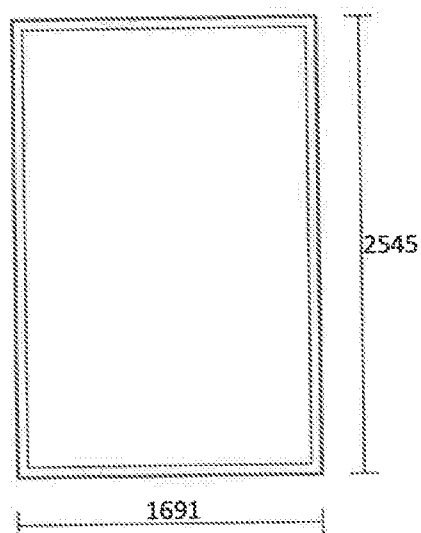


Item 6 North El. FF Landing/Hall side
 No. Units: 3
 Type: fixed casement profile alu-clad window
 Width: 1691 Height: 2545
 Glazing: Double glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBC Internal: RALTBC
 Handle:
 U-Values: Glass 1.27 Window: 1.4

Notes: External view. Glass is lam/tough. Packer for sill. Marine grade finish. 3 units next to each other, to be fitted together on site.

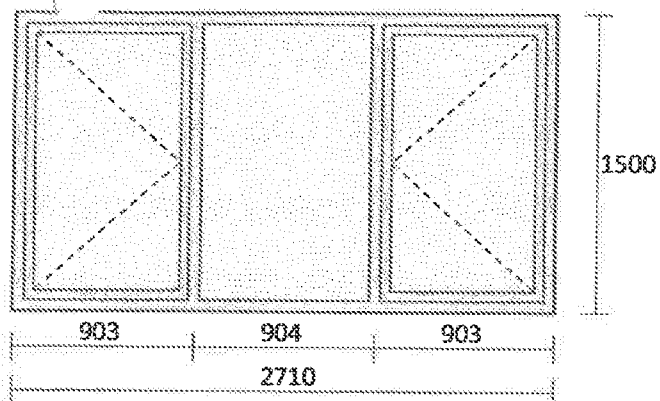


Item 7 North El. FF Bed5
No. Units: 1
Type: side hung alu-clad window
Width: 2710 **Height:** 1500
Glazing: Double glazed with low E glass
Material: pine, finger-jointed
Colour: External: RALTBC Internal: RALTBC
Handle: Hoppe Lockable Silver
U-Values: Glass 1.14 Window: 1.29

Notes: External view. Glass is tough/tough. Packer for sill. Marine grade finish. 2 Grey trickle vents included.

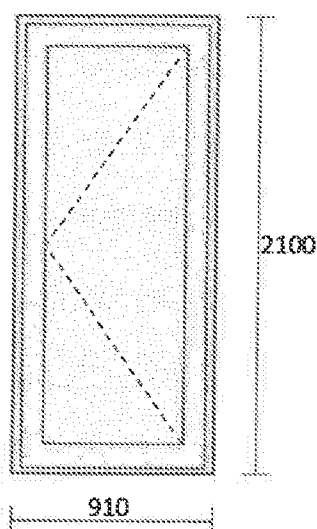


Item 8 East El. GF Utility
No. Units: 1
Type: entrance - inward alu-clad door
Width: 910 **Height:** 2100
Glazing: Double glazed with low E glass
Material: engineered pine
Colour: External: RALTBC Internal: RALTBC
Handle: Mila Prosecure Lockable Silver
U-Values: Glass 1.12 Window: 1.4

Notes: External view. Right hung. Glass is lam/tough. Marine grade finish. Clear opening at 90 degrees is 740mm. Aluminium threshold.

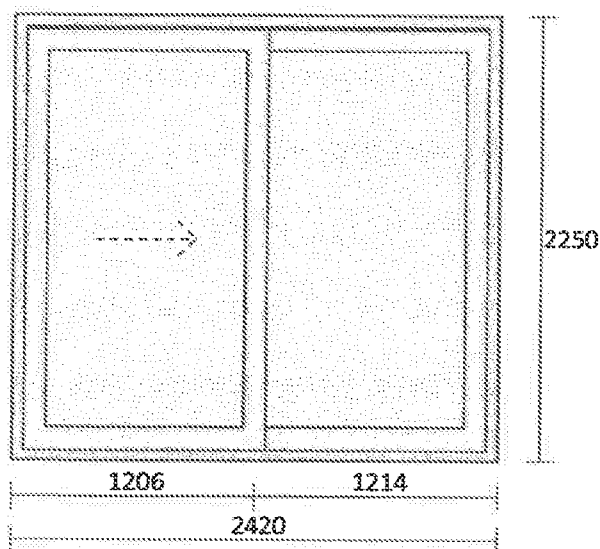


Item 9 South El. GF Bed1
No. Units: 1
Type: lift and slide alu-clad door
Width: 2420 **Height:** 2250
Glazing: Double glazed with low E glass
Material: engineered pine
Colour: External: RALTBC Internal: RALTBC
Handle: GU Silver
U-Values: Glass 1.17 Window: 1.3

Notes: Internal view. Handle and lock inside, finger plate outside. Glass is lam/tough. Thermostep threshold. Left pane active. Marine grade finish.

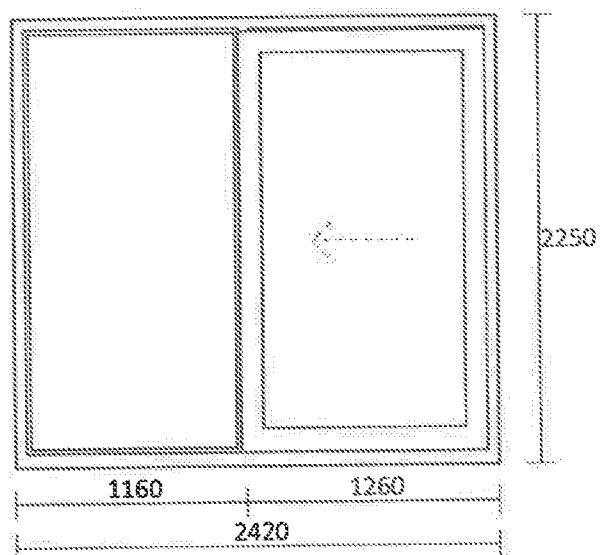


Item 10 Option South El. GF Bed1
 No. Units: 1
 Type: sliding alu-clad door
 Width: 2420 Height: 2250
 Glazing: Triple glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBBC Internal: RALTBBC
 Handle: ROTO lockable silver
 U-Values: Glass 0.52 Window: 0.73

Notes: External view. Handle and lock inside, finger plate outside. Glass is lam/tough/tough. Right pane active. Marine grade finish. Option for sliding door price is £2631.66.

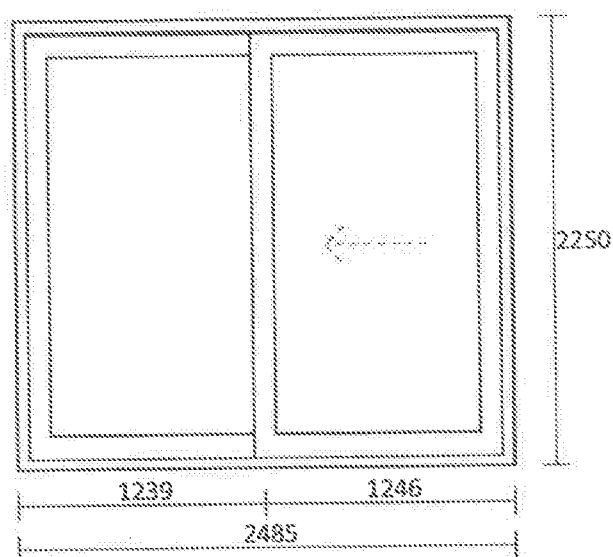


Item 11 South El. GF Lounge
 No. Units: 1
 Type: lift and slide alu-clad door
 Width: 2485 Height: 2250
 Glazing: Double glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBBC Internal: RALTBBC
 Handle: GU Silver
 U-Values: Glass 1.12 Window: 1.2

Notes: Internal view. Handle and lock inside, finger plate outside. Glass is lam/tough. Thermostep threshold. Right pane active. Marine grade finish.

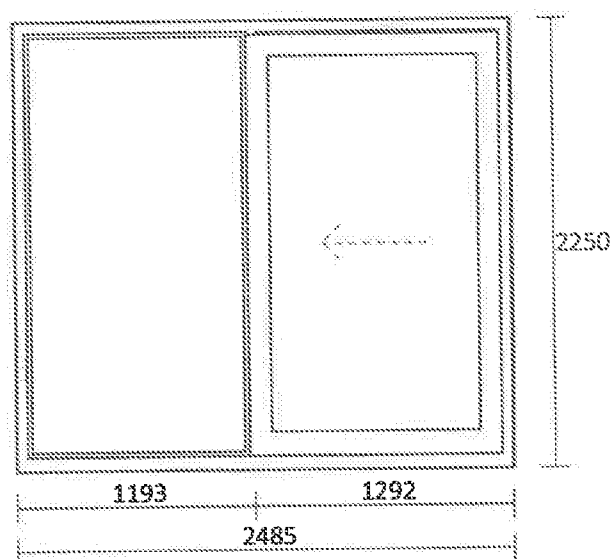


Item 12 Option South El. GF Lounge
 No. Units: 1
 Type: lift and slide alu-clad door
 Width: 2485 Height: 2250
 Glazing: Triple glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBBC Internal: RALTBBC
 Handle: ROTO lockable silver
 U-Values: Glass 0.52 Window: 0.72

Notes: External view. Glass is lam/tough/tough. Handle and lock inside, fingerplate outside. Right pane active. Marine grade finish. Option for sliding door price is £2665.82.

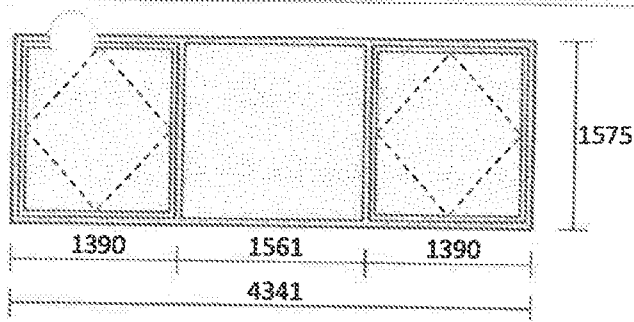


Item 13 South El. GF Sunroom
No. Units: 1
Type: top swing alu-clad window
Width: 4341 **Height:** 1575
Glazing: Double glazed with low E glass
Material: pine, finger-jointed
Colour: External: RALTBC Internal: RALTBC
Handle: Hoppe Lockable Silver
U-Values: Glass 1.14 Window: 1.25

Notes: External view. Glass is tough/tough. Packer for sill. Marine grade finish. 2 Grey trickle vents included.

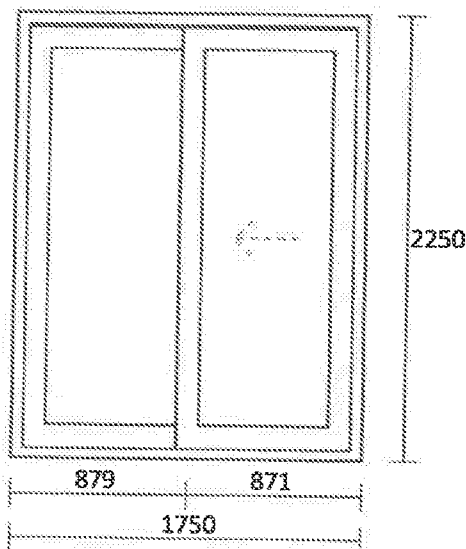


Item 14 South El. GF Bed3
No. Units: 1
Type: lift and slide alu-clad door
Width: 1750 **Height:** 2250
Glazing: Solid
Material: engineered pine
Colour: External: RALTBC Internal: RALTBC
Handle: GU silver
U-Values: Glass 1.12 Window: 1.3

Notes: Internal view. Glass is lam/tough. Thermostep threshold. Handle and lock inside, fingerplate outside. Marine grade finish. Minimum width for height is 1750mm.

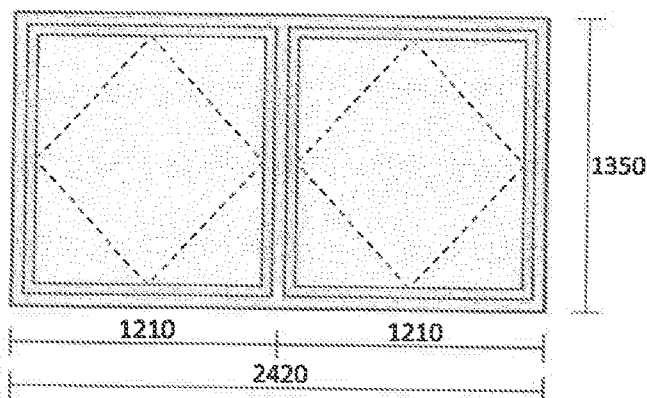


Item 15 South El. FF MasterEnsuite
No. Units: 1
Type: top swing alu-clad window
Width: 2420 **Height:** 1350
Glazing: Double glazed with low E glass
Material: pine, finger-jointed
Colour: External: RALTBC Internal: RALTBC
Handle: Hoppe Lockable Silver
U-Values: Glass 1.1 Window: 1.3

Notes: External view. Packer for sill. Marine grade finish. 2 Grey trickle vents included.

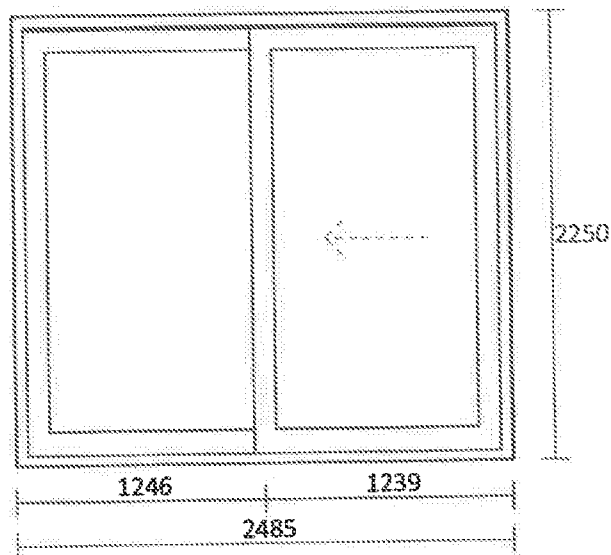


Item 16 South El. FF MasterBed
 No. Units: 1
 Type: lift and slide alu-clad door
 Width: 2485 Height: 2250
 Glazing: Double glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBC Internal: RALTBC
 Handle: GU silver
 U-Values: Glass 1.12 Window: 1.2

Notes: internal view. Glass is lam/tough. Marine grade finish. Thermostep threshold. Handle & lock inside, fingerplate outside.

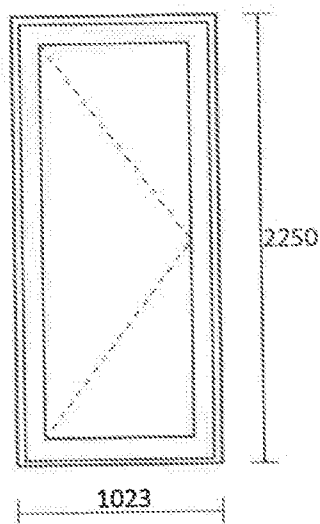


Item 17 South El. FF MasterBed
 No. Units: 1
 Type: entrance - outward alu-clad door
 Width: 1023 Height: 2250
 Glazing: Double glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBC Internal: RALTBC
 Handle: Mila Prosecure Lockable Silver
 U-Values: Glass 1.12 Window: 1.4

Notes: External view. Left hung. Glass is lam/tough. Clear opening at 90 degrees is 853mm. Aluminium threshold.

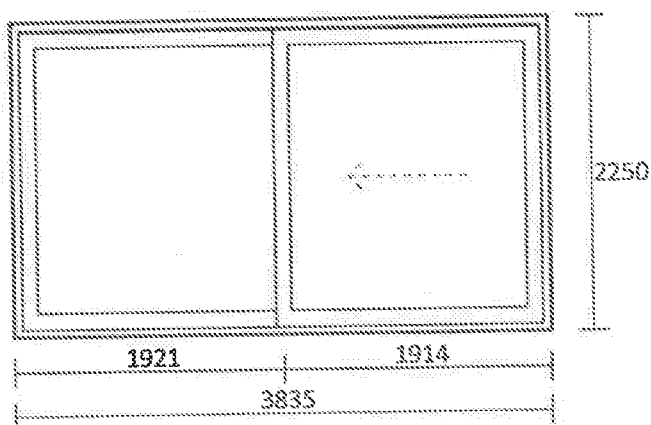


Item 18 South El. FF Living
 No. Units: 1
 Type: lift and slide alu-clad door
 Width: 3835 Height: 2250
 Glazing: Double glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBC Internal: RALTBC
 Handle: GU Silver
 U-Values: Glass 1.15 Window: 1.3

Notes: Internal view. Handle and lock inside, finger plate outside. Glass is lam/tough. Thermostep threshold. Marine grade finish.

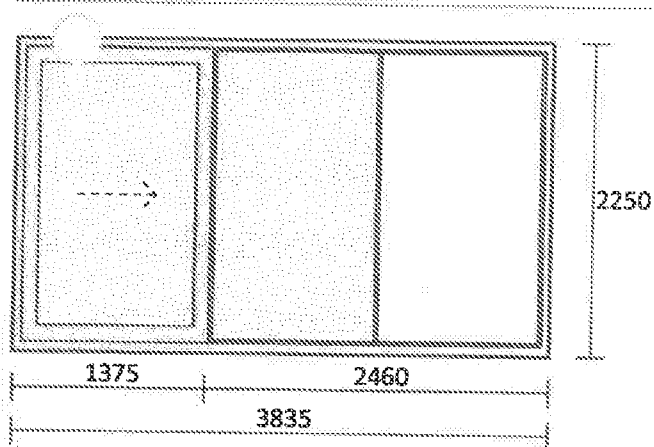


Item 19 Option South El. FF Living
No. Units: 1
Type: sliding alu-clad door
Width: 3835 **Height:** 2250
Glazing: Triple glazed with low E glass
Material: engineered pine
Colour: External: RALTBC Internal: RALTBC
Handle: ROTO lockable silver
U-Values: Glass 0.57 Window: 0.8

Notes: External view. Handle and lock inside, finger plate outside. Glass is lam/tough/tough. Thermostep threshold. Marine grade finish. Left pane active. Option for sliding door price is £3518.98.

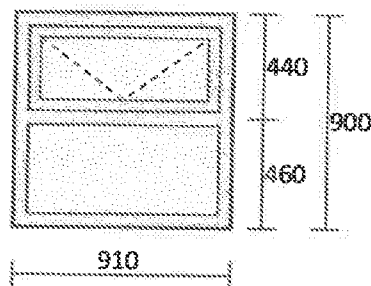


Item 20 West El. GF Bathroom, Ensuite
No. Units: 2
Type: top hung alu-clad window
Width: 910 **Height:** 900
Glazing: Double glazed with low E glass - obscure
Material: pine, finger-jointed
Colour: External: RALTBC Internal: RALTBC
Handle: Hoppe Lockable Silver
U-Values: Glass 1.1 Window: 1.4

Notes: External view. Glass is obscure. Packer for sill. Marine grade finish. 1 Grey trickle vent included.

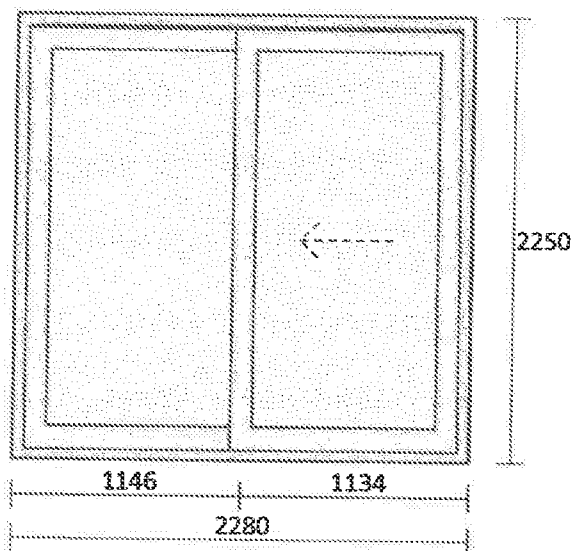


Item 21 West El. GF Sunroom
No. Units: 1
Type: lift and slide alu-clad door
Width: 2280 **Height:** 2250
Glazing: Double glazed with low E glass
Material: engineered pine
Colour: External: RALTBC Internal: RALTBC
Handle: GU Silver
U-Values: Glass 1.12 Window: 1.2

Notes: Internal view. Handle and lock inside, finger plate outside. Glass is lam/tough. Thermostep threshold. Right pane active. Marine grade finish.

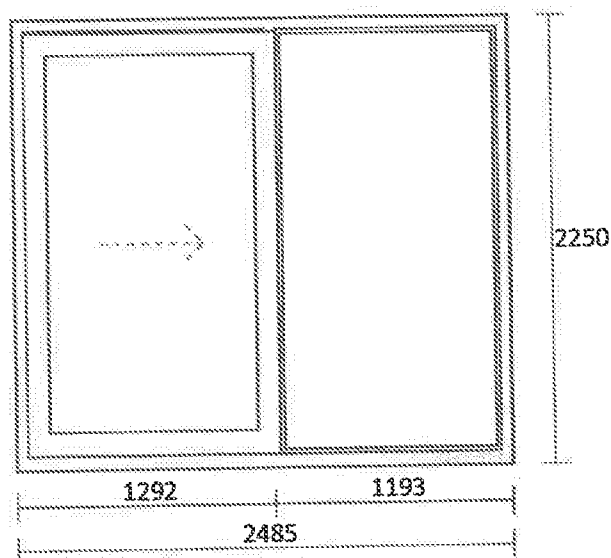


Item 22 Option West El. GF Sunroom
 No. Units: 1
 Type: sliding alu-clad door
 Width: 2485 Height: 2250
 Glazing: Triple glazed with low E glass
 Material: engineered pine
 Colour: External: RALTBC Internal: RALTBC
 Handle: ROTO lockable silver
 U-Values: Glass 0.52 Window: 0.72

Notes: External view. Handle and lock inside, finger plate outside. Glass is lam/tough/tough. Left pane active. Marine grade finish. Option for sliding door price is £2666.04.

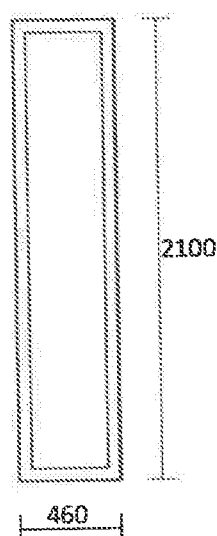

Item 23 West El. FF Kitchen
 No. Units: 1
 Type: fixed casement profile alu-clad window
 Width: 460 Height: 2100
 Glazing: Double glazed with low E glass
 Material: pine, finger-jointed
 Colour: External: RALTBC Internal: RALTBC
 Handle:
 U-Values: Glass 1.1 Window: 1.3

Notes: External view. Glass is tough/tough. Packer for sill. Marine grade finish.

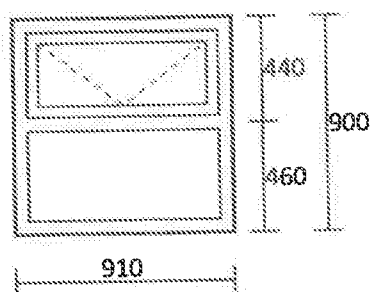

Item 24 West El. FF Ensuite
 No. Units: 1
 Type: top hung alu-clad window
 Width: 910 Height: 900
 Glazing: Double glazed with low E glass - obscure
 Material: pine, finger-jointed
 Colour: External: RALTBC Internal: RALTBC
 Handle: Hoppe Lockable Silver
 U-Values: Glass 1.1 Window: 1.4

Notes: External view. Glass is milky. Packer for sill. Marine grade finish. 1 Grey trickle vent included.