
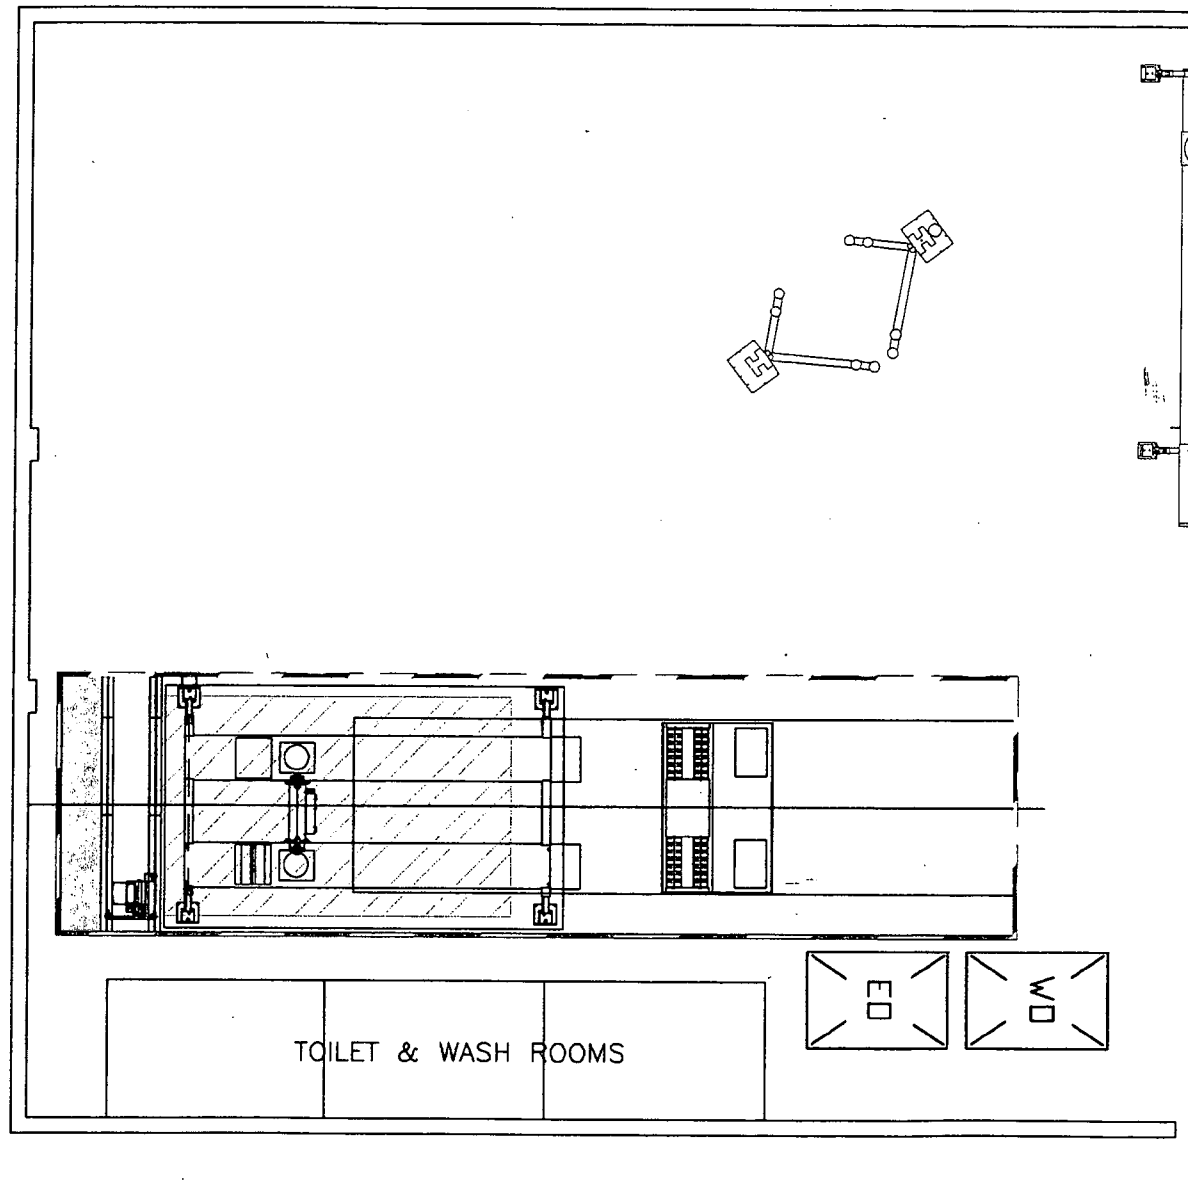


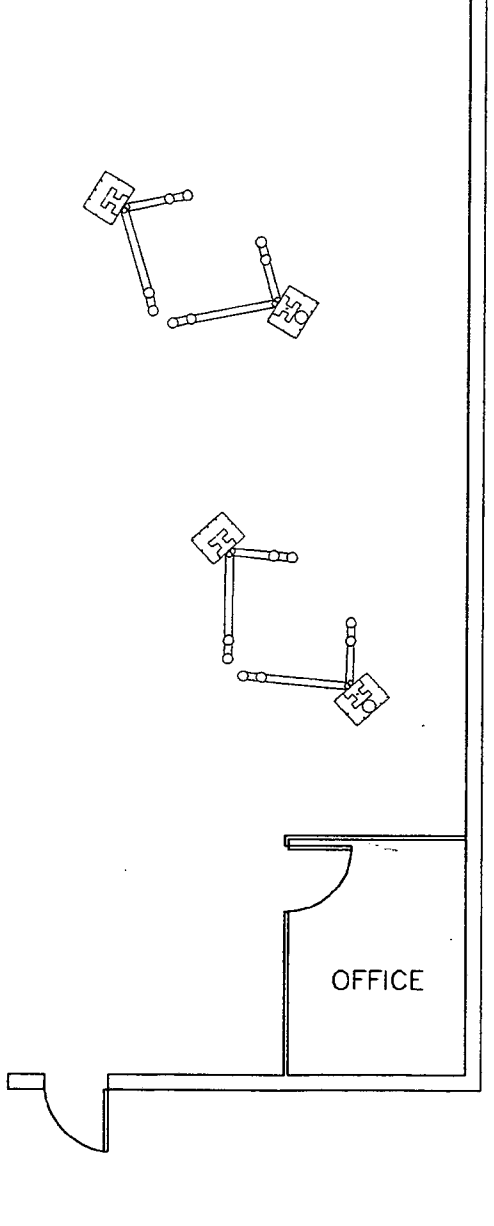

ARUN DISTRICT COUNCIL
No. R/308/06
RECEIVED 22/12/06

0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

NOTES:

CLASS I & II
- 2 x Allocated parking bays (2.5x2.0 meters)
- Entrance height 2.5 metres
- Headlight Aligner standing area to be level +/- 6mm
- Headlight Aligner Rails to be level +/- 2mm
- Dual direction Brake Tester

CLASS IV
- 2 x Allocated parking bays (4.5x2.5 meters)
- Entrance height 4.0 metres
- Headlight Aligner standing area to be level +/- 6mm
- Headlight Aligner Rails to be level +/- 2mm
- Minimum height over lift 3.8 Metres
- Lift columns in excess of 500mm from nearest obstruction

CLASS VII
- 2 x Allocated parking bays (7.0x3.0 meters)
- Entrance height 4.0 metres
- Headlight Aligner standing area to be level +/- 6mm
- Headlight Aligner Rails to be level +/- 2mm
- Minimum height entire bay 3.5 Metres
- Depth of testing pit 1.6 Metres

GTC
EST PERSONAL SERVICE 1960
The Garage Equipment Company

Guaranteed Tool Company Ltd
GT House, Ashley Crescent,
Southampton, SO19 9NA
Tel: 023 80447440
Fax: 023 80447077
Email: post@guaranteed-tool.co.uk
THE TRADE GROUP

Client
Chandlers of Worthing

Project
Class IV ATL Lane & Service Bay

Proposed Equipment Manufacturer(s)
- Rotary
- Trademaster
- Maha

Drawing by:
Dean Heighton

Scale	Date
1:100 (do not scale)	JULY 2006

Project no.	Sequential	Contact on any query:
ACLT06 - 0048	V1	Mike Kelly 07785 293365

ARUN DISTRICT COUNCIL:R/308/06/ 13/11/2006