


Conservation Roof Windows

www.velux.co.uk/products

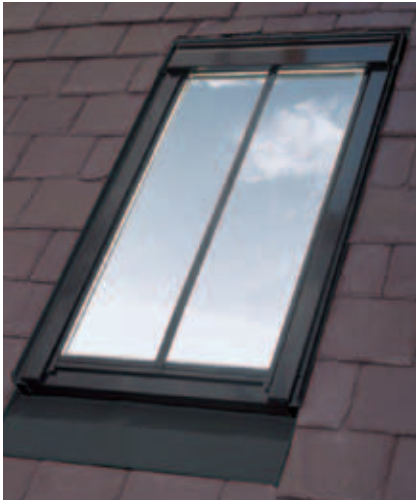

VELUX quality with conservation style. Comes with a black external profile, glazing bar and recessed installation for slated and tiled roofs.

- Available in either centre-pivot or top-hung style.
- Top control bar for easy opening and even ventilation when closed.
- Top-hung version suitable for emergency escape.
- All packages include BDX + BFX.

Centre-pivot



Top-hung



Recessed into Slate	20°-90°
Plain tiles	25°-90°
Tiles	15°-90°
Recessed into Tiles	20°-90°

Recessed into Slate	20°-55°
Plain tiles	20°-55°
Tiles	15°-55°
Recessed into Tiles	20°-55°

For roof pitches 55°-75°, please specify special springs when ordering.

Conservation Roof Windows

(Other sizes of Conservation Roof Windows are available subject to lead times).

External frame size (nominal w x h) cm

55x98	55x118	66x118	78x118	78x140	134x98

Code	Description	C04	C06	F06	M06	M08	U04
------	-------------	-----	-----	-----	-----	-----	-----

Packages include: GGL Centre-Pivot or GHL Top-Hung Roof Window with glazing bar, flashing, Insulation Collar (BDX) and Underfelt Collar (BFX).

Centre-Pivot Roof Windows, pine. Toughened outer pane (--59). U-value 1.4 W/m²K.

GGL SD5N1	GGL 3559 Roof Window + EDN Recessed Flashing for slate up to 8mm thick (min 20° roof pitch)	£492.00	£508.80	£556.80	£638.40	£681.60	£796.80
GGL SD5P1	GGL 3559 Roof Window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	£441.60	£456.00	£499.20	£578.40	£619.20	£729.60
GGL SD5W1	GGL 3559 Roof Window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	£456.00	£470.40	£516.00	£595.20	£638.40	£748.80
GGL SD5J1	GGL 3559 Roof Window + EDJ Recessed Flashing for tiles up to 90mm in profile (min 20° roof pitch)	£492.00	£508.80	£556.80	£638.40	£681.60	£796.80

Top-Hung Roof Windows, pine. Toughened outer pane (--59). Suitable for emergency escape. U-value 1.4 W/m²K.

GHL SD5N1	GHL 3559 Roof Window + EDN Recessed Flashing for slate up to 8mm thick (min 20° roof pitch)	-	-	-	-	£772.80	-
GHL SD5P1	GHL 3559 Roof Window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	-	-	-	-	£710.40	-
GHL SD5W1	GHL 3559 Roof Window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	-	-	-	-	£729.60	-
GHL SD5J1	GHL 3559 Roof Window + EDJ Recessed Flashing for tiles up to 90mm in profile (min 20° roof pitch)	-	-	-	-	£772.80	-



OPTIONAL GLAZING BARS FOR STANDARD VELUX ROOF WINDOWS

Create a traditional style appearance by adding conservation glazing bars to standard grey VELUX Roof Windows.

- Grey glazing bar to match grey exterior finish of all standard VELUX Roof Windows.

55x78	55x98	78x98	134x98	55x118	66x118	78x118	114x118	78x140	94x140	134x140	94x160

Optional glazing bars for standard windows	C02	C04	M04	U04	C06	F06	M06	S06	M08	P08	U08	P10
2 glazing bars for U04, S06 & U08	ZGA W02 0024 £60.00	ZGA W04 0024 £62.40			ZGA W06 0024 £64.80				ZGA W08 0024 £67.20			ZGA W10 0024 £69.60

► Glazing bars not available for --65 glazing variant.