


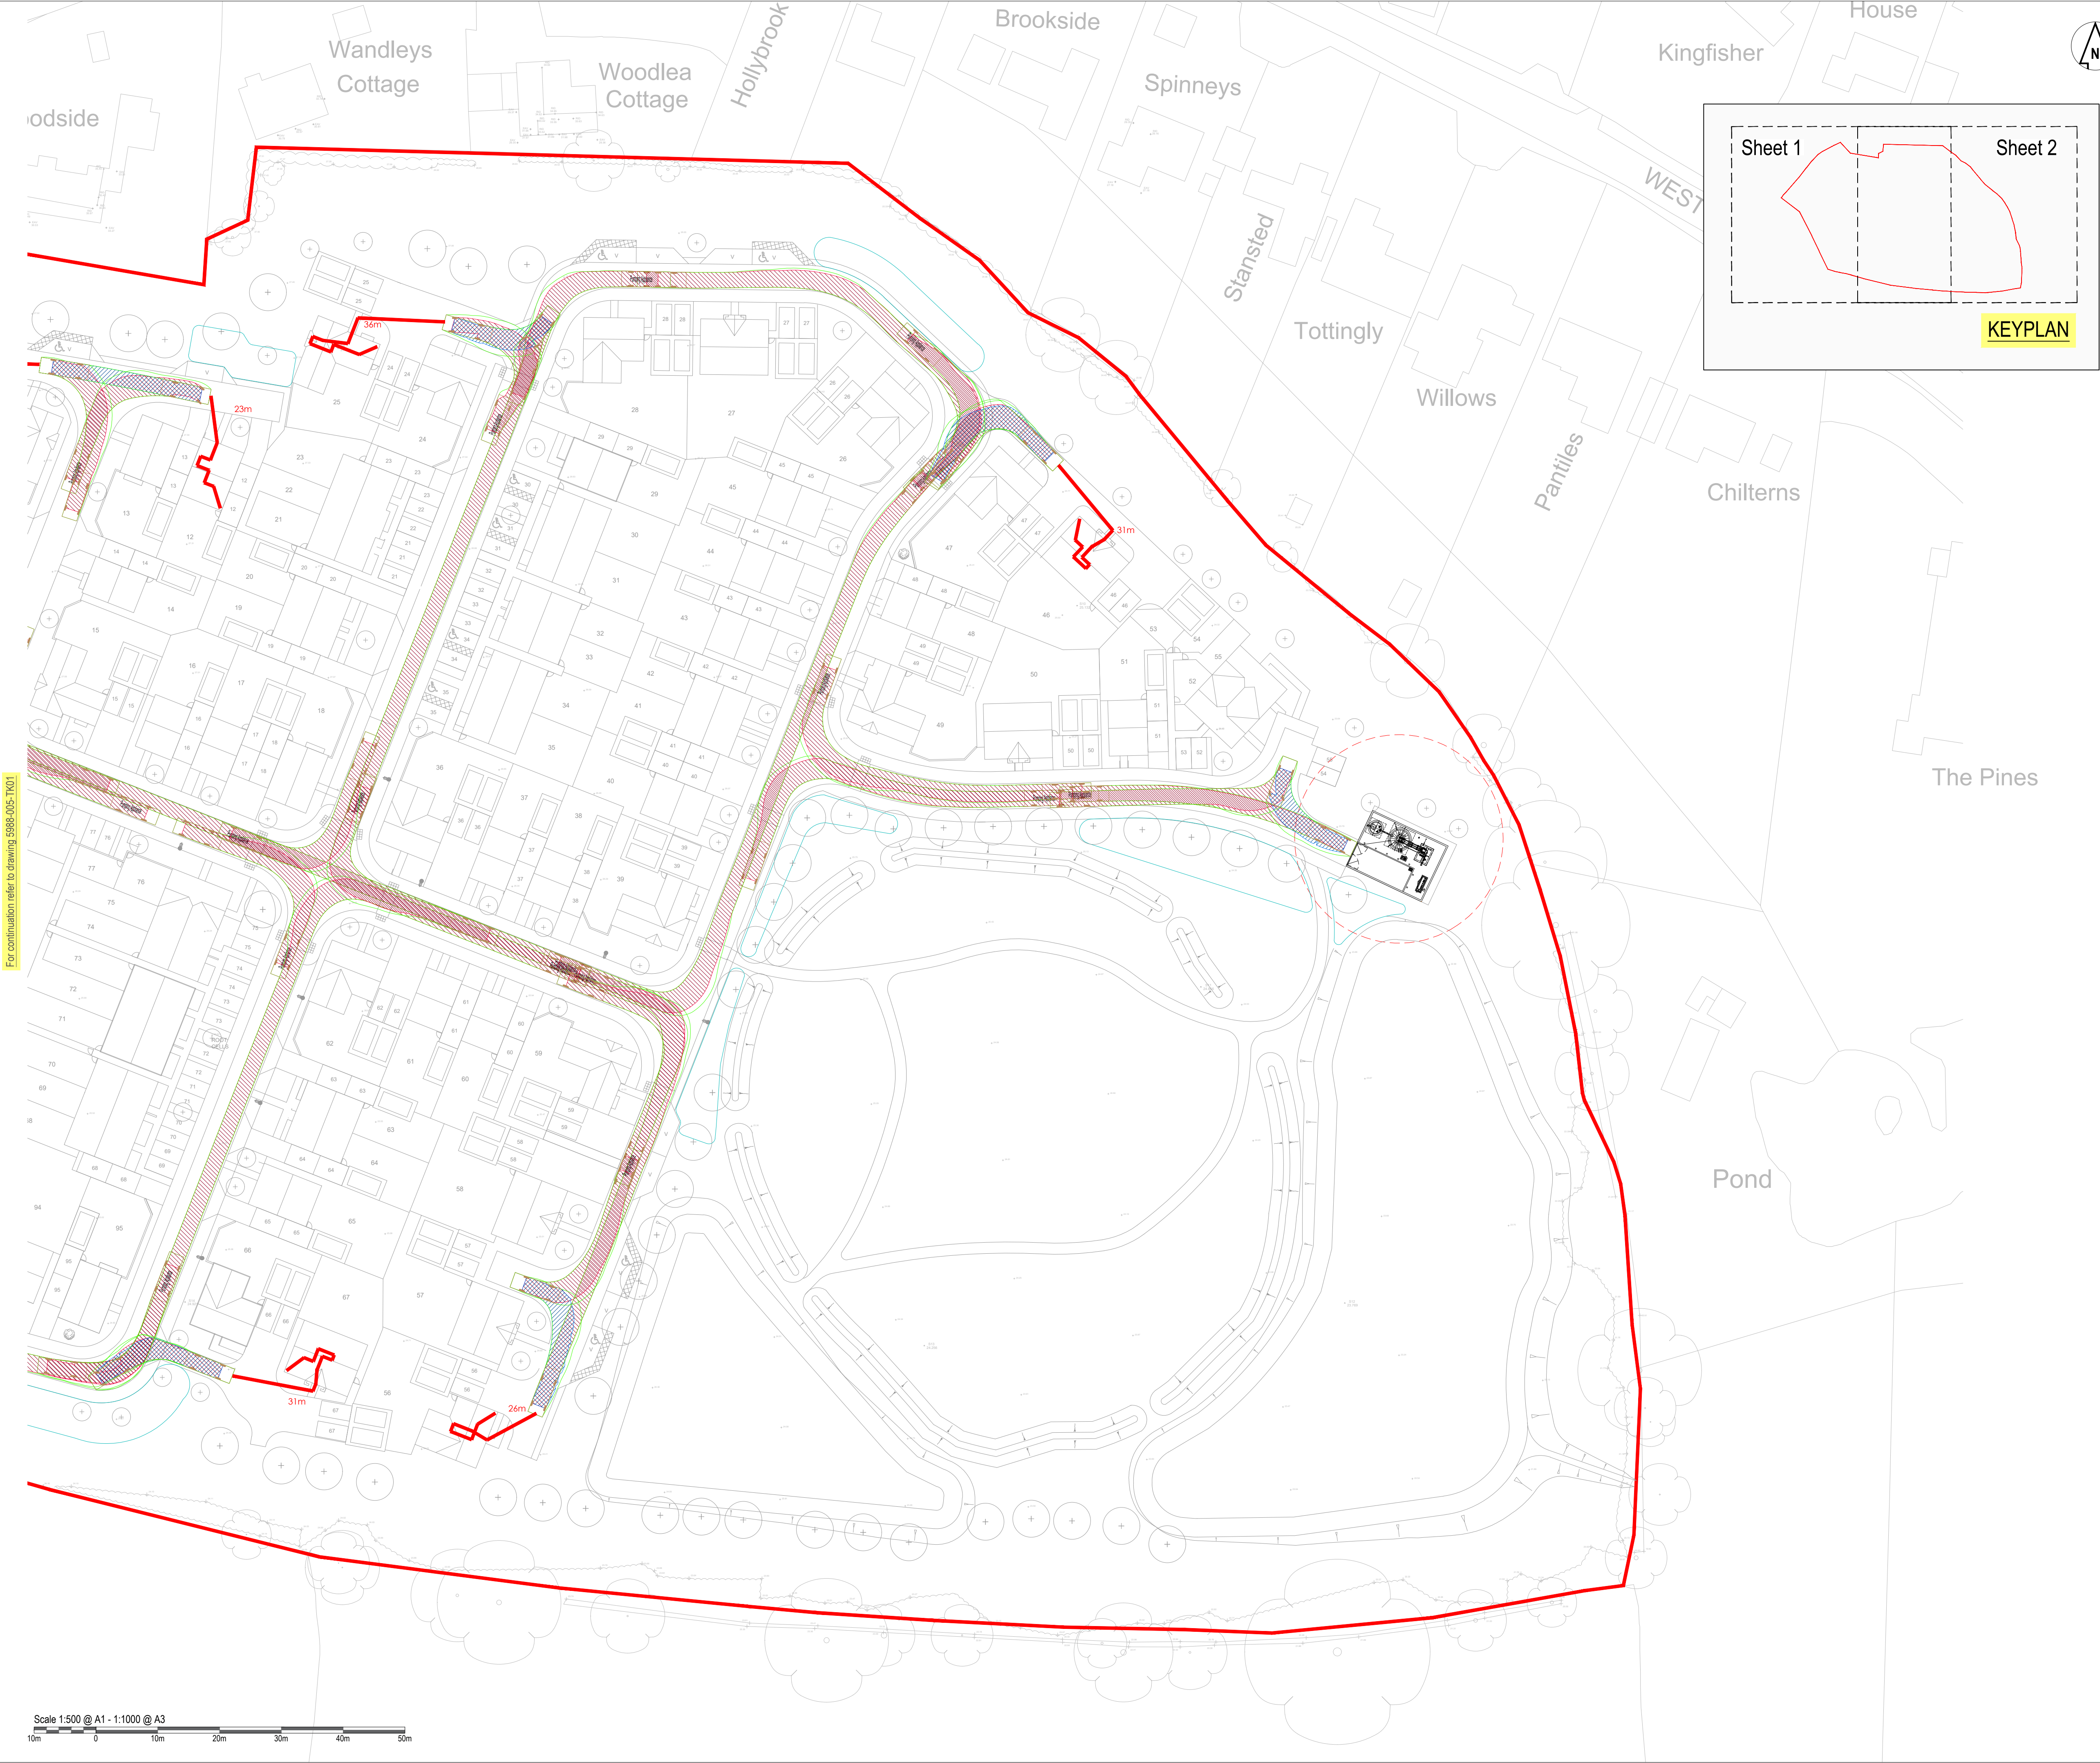

For continuation refer to drawing 5988-005-TK01

Scale 1:500 @ A1 - 1:1000 @ A3
10m 0 10m 20m 30m 40m 50m

DO NOT SCALE OFF THIS DRAWING

GENERAL NOTES:

- All dimensions to be checked on site. All details and dimensions relating to sub-Contractors work must be checked and agreed between the sub-Contractor or supplier and the general Contractor.
- This drawing is to be read in conjunction with all relevant Architect's and Engineer's drawings and specification.
- The main Contractor is responsible for ensuring the stability of the structure whilst the works are in progress.
- Any information given regarding existing underground services is given in good faith after consultation with the relevant authority. No liability is accepted by the Consultant and the main Contractor is responsible for obtaining and checking all information and taking due care and attention whilst undertaking the works.


CDM 2015 RESIDUAL RISKS

- All areas of live traffic and pedestrian movements shall be subject to appropriate traffic management barriers and signs.
- Access points onto live public highway.
- Unauthorised access to the site must be prevented at all times
- Existing road drainage to be maintained.
- Be aware of possible live drainage flows and foul effluent during construction. The Contractor shall assess and implement a safe working system and equipment (PPE) as necessary.

The above residual risks are for non-standard hazards. It is assumed that a competent contractor familiar with the construction of this type of work will be appointed who will be aware of the standard hazards.

Key:

- Wheel track (Forward manoeuvre) Shows outer limit of wheel entirely within the carriageway. Not encroaching on any kerbs
- Wheel track (Reverse manoeuvre) Shows outer limit of wheel entirely within the carriageway. Not encroaching on any kerbs
- Body track - Shows the outer limit of body generally within carriageway, may overhang the verge when turning where necessary

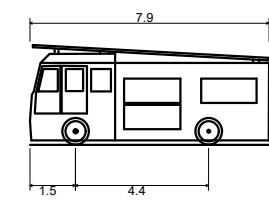

Pumping Appliance
Overall Length 7.900m
Overall Width 2.500m
Overall Body Height 3.300m
Min Body Ground Clearance 0.140m
Track Width 2.500m
Lock to lock time 4.09s
Kerb to Kerb Turning Radius 7.750m

A01	FOR APPROVAL	MH	MH	SB	01/06/2026
A02	MINOR UPDATES TO BACKGROUND INFORMATION	MH	MH	SB	15/06/2026
Rev	Comment	By	Chkd	Appr	Date

Revision History

APPROVAL

BELLWAY WESSEX

robert west
proesgroup
1 Paris Garden
London
SE1 1ND
t: 0203 773 7880
www.robertwest.co.uk

Project
WANDLEYS LANE
FONTWELL

Drawing Title
SWEPT PATH ANALYSIS
FIRE TENDER
SHEET 2 OF 2

RVCL Internal Register reference: 5988-005

Scales @ A1

5988-005-TK02 - A02