


CM08 Z.C4.9238-GK.EP5

COMPRESSOR	
Brand	:Embraco
Model	:NJ 9238 GK
Cooling Capacity	: 2.490 Watts
Evap./Cond. Temp.	: -10/+45°C
Refrigerant	: R 404A
Compressor HP	: 1,5
Power Supply	: 220 V/50 Hz
Noise Level (at 1,8 m)	: 68,53 dBA
Noise Level (at 10,0 m)	: 35,23 dBa
Compressor Discharge line (Ø inches)	:1/4"
Dompessor Suction line (Ø inches)	:1/2"

EQUIPMENT		
	Brand	Model
Receiver	FrigoCraft	FrigoCraft 2lt
Filter Dryer	SANHUA	SanHua DTG-30003- 052
Sight Glass	SANHUA	SanHua SYJ-42021
Low Pressure Control	Danfoss	Danfoss 061F9032 ACB-2UC32W
High Pressure Control	Danfoss	Danfoss 061F9077 ACB-2UC85W
Oil Seperator	-	-

DIMENSIONS	X	Y	Z	
Device mm (L/W/H)	1005 mm	676 mm	522 mm	
Packing mm (L/W/H) (Include Oil Receiver)	1010 mm	700 mm	540 mm	
WEIGHT	Kg			
Device	74			
Packing	76			
CONNECTION	Inches			
Liquid Line (Ø inches)	1/4"			
Suction Line (Ø inches)	1/2"			

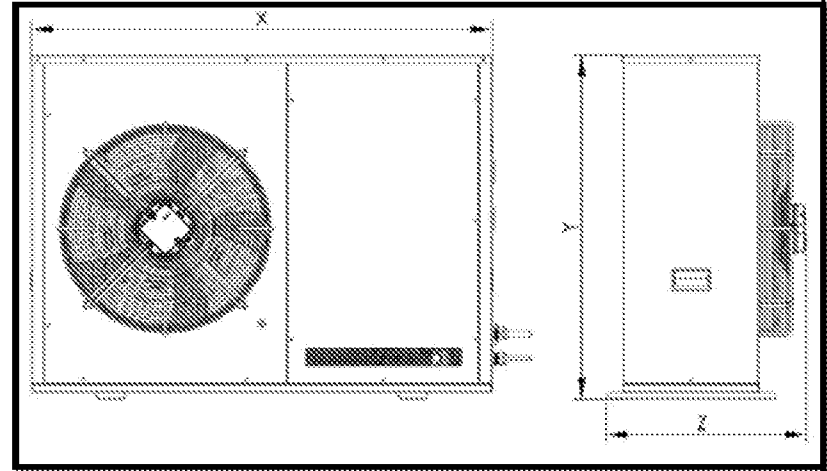

CAPACITY					COP		
Q		-5	-10	-15	-5	-10	-15
	40	3.398	2.762	2.293	2,13	1,88	1,64
	45	3.074	2.490	1.977	1,87	1,66	1,45
	50	2.721	2.193	1.734	1,61	1,43	1,26

CONDENSER AND FAN	
	Description
Brand	KARYER
Model	: D 15 - 15 m²
Geometry	:25,00 x 21,65 mm
Copper Pipe Size	:7mm x 0,30 mm-Internal Grooved
Fin Spacing	:2,1 mm
Fin Type	:Corrugated
Heat Transfer Area	:15,33 m²
Fan Brand	C-FAN
Fan Model	:1 x Ø400
Inlet Power (kW)	:0,147
IP Code	: IP 54