


Status

A01 For Approval
A02 For Approval

- NOTES:
1. This drawing shall be read in conjunction with all other correct documentation. Please consider the environment before printing this drawing.
2. All areas that are appropriate for the contractor shall be indicated by a yellow background. The contractor shall be responsible for the correct placement of the manhole positions of all installed proposed services and equipment.
3. Sewerage to be sited *5m* away from house.
4. The exact sizes and shape of the sewerage to be determined as per: Heston Cottage Sewerage Site Results (BRE Digest 365).
5. Maximum installation depth 1.5m
6. Slip trap to be installed according to the manufacturer specifications.
7. All pipes to be 100mm Diameter.
8. All surface drainage system to be in accordance with current Building Regulations approved document Part H and the satisfaction to the building control inspectors.
9. No other areas shall be connected to the designated Sewerage.

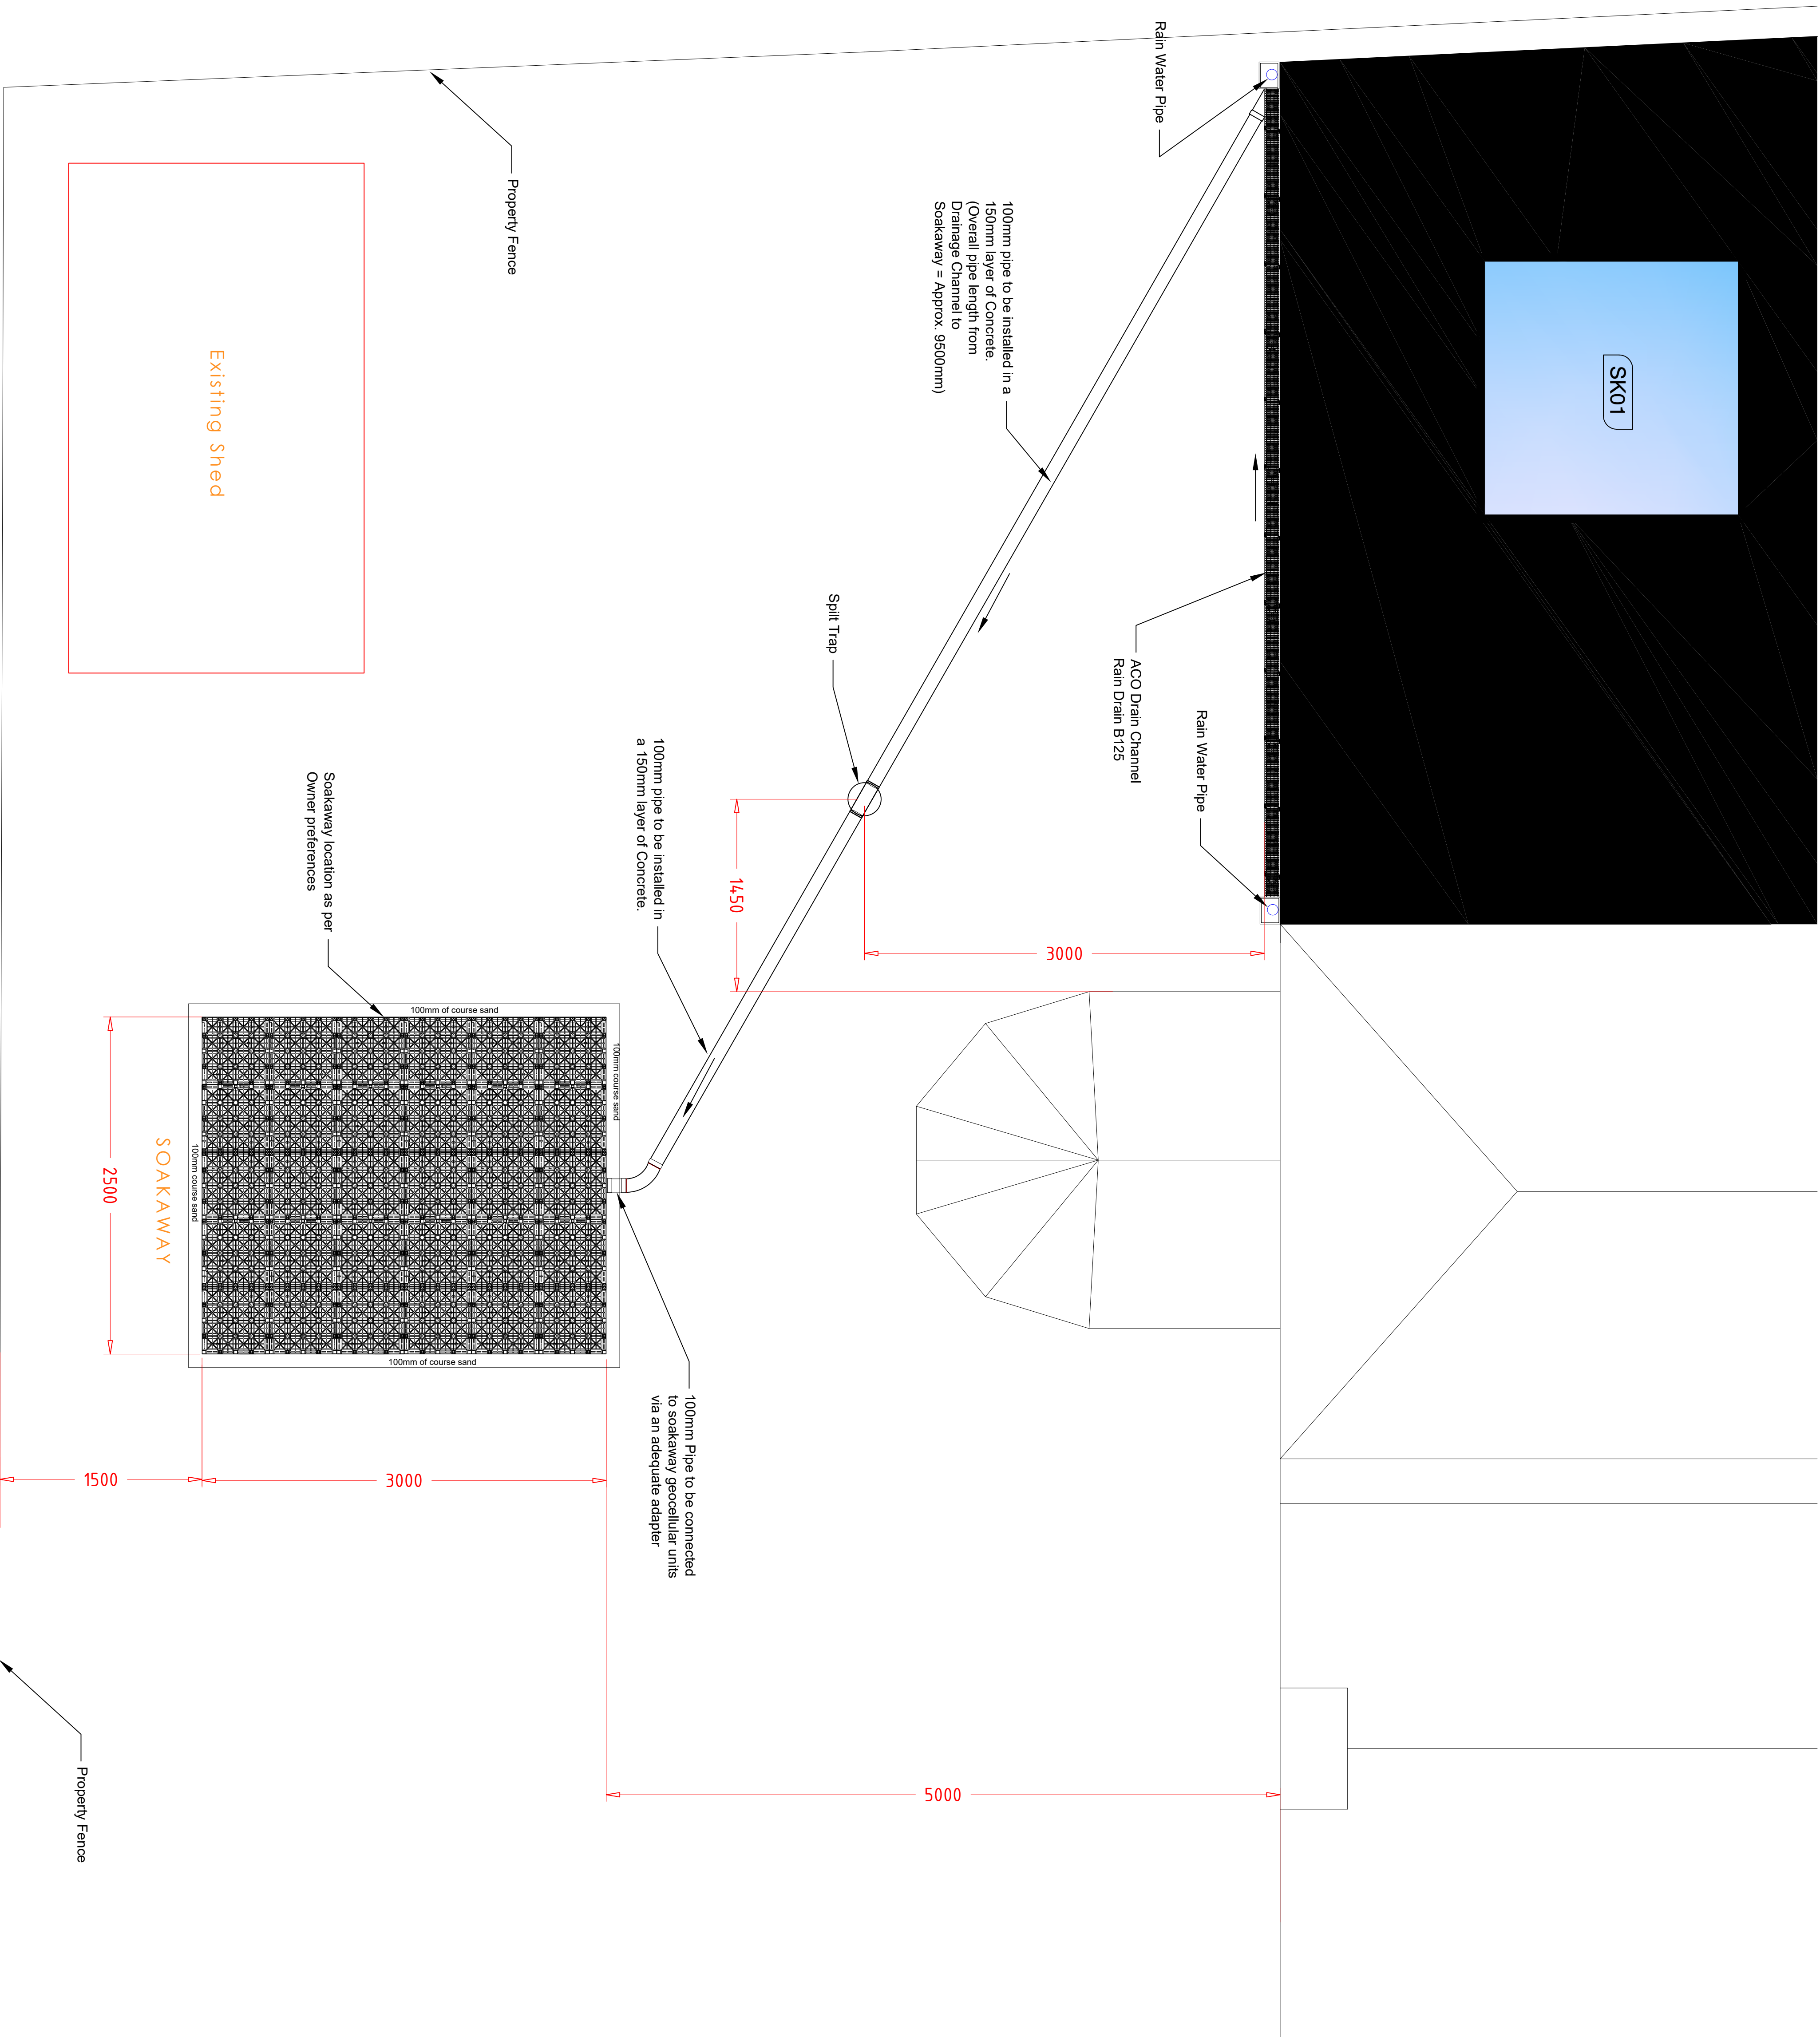

Site:
Hazel Cottage
Church Lane
Yapton
West Sussex
BN18 0EH

Drawing Title:
Surface Water Layout

Date:	Drawing:
27/04/2020	1001

Designed by:
HN

Checked by: Revision:
MNB A02

Approved by: Scale A1@