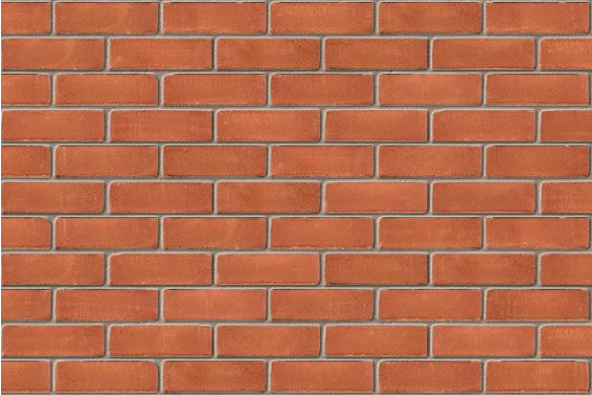



Bognor Regis Crematorium
Schedule of External Materials

Building Element	Material Proposals	Example Image
External Walls		
Vertical Timber Cladding	Scottish Larch Cladding – Square edge vertical boards fixed in hit and miss pattern.	
Exposed Brick below DPC and below Vertical Timber cladding	Ibstock Brick – Leicester Red Stock – Half lap stretcher Bond	
Mortar to Brickwork	Lime sand cement-based mortar with recessed horizontal joints and flush vertical joints.	
Windows and Screens		
All areas	RAL 7006 powder coated aluminium clad wood frame to windows. Powder coated aluminium window cills and scottish larch head and side boards	

Bognor Regis Crematorium
Schedule of External Materials

External doors		
Chapel Main Entrance, Exit & WC doors	Horizontal boarded solid oak doors with clear coating finish. Some doors with vision panels.	
Public Doors to office and back of house	Powder coated aluminium clad wood frame doors with glazing. RAL 7006. (RAL 7006 approximately shown in image to right)	
All other doors & louvres	Powder coated aluminium RAL 7006.	
Roof		
Tiled roof	Red clay roof tiles – Wienerberger – Alban Sussex Blend Or Wienerberger Goxhill 3 colour Brindle Mix.	
Fascia	Hardwood fascia to match cladding.	

Bognor Regis Crematorium
Schedule of External Materials

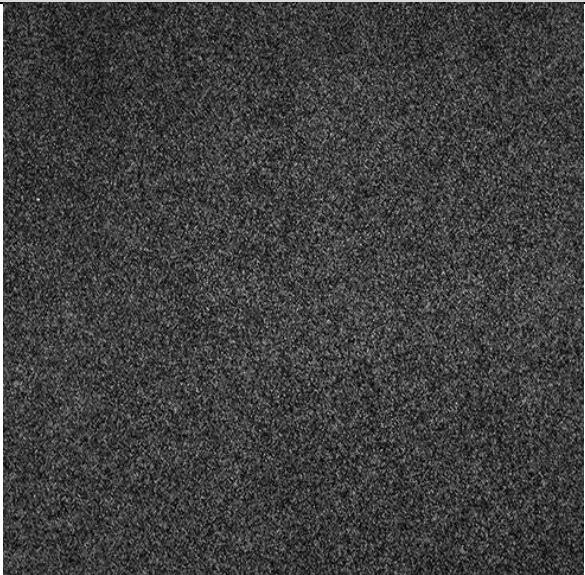Porte Cochere & Floral Tribute soffit	Scottish Larch soffit	
Porte Cochere & Floral Tribute structure	Exposed steelwork coloured to match window frames RAL 7006.	
Rainwater goods		
Hoppers and downpipes.	Half round galvanised steel rainwater goods	
External Hard Surfaces		
Shared surface roadway and parking bays.	Tarmac	

Bognor Regis Crematorium
Schedule of External Materials

Paths	Block paviours – Marshalls Tegula Traditional finish in stretcher random coursing, soldier course to all edges	
Parking bays with permeable paving	Permeable paviours – Marshalls Priora Bracken finish in stretcher random coursing, soldier course to all edges	