


Horizon Louvre

Designed, Developed &
Manufactured in the UK



Colour Finish

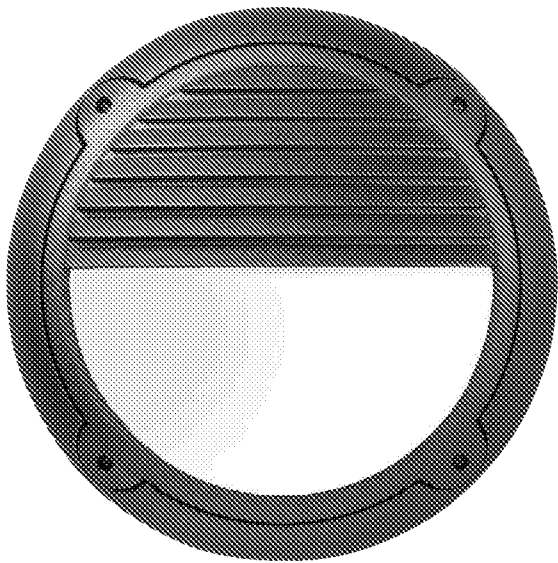

Black
HR./B



White
HR./W



Titanium
HR./X



Satin Aluminium
HR./F

LED Types

- LED 600 (HR2 only)
- LED 1800 (HR3 only)

Materials


- Body: 283mm/353mm vandal resistant polycarbonate with self-extinguishing fire properties
- Diffuser/Fascia Ring: Vandal resistant polycarbonate in opal with self-extinguishing fire properties
- Diffuser 2: (353mm circular) Vandal resistant polycarbonate clear lens with self-extinguishing fire properties
- Die cast aluminium option available (HR3 only)

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions & photocell.
- Screw down lid.
- Photocell version - external use only.
- Hi-LO PIR - 100% light output, dims to 10% during periods of inactivity.
- 2 x Conduit entry points (mini version only).


Standards

- IP65.
- 20 Joules of impact resistance (IK10).
- 'F' Mark
- CE
- BS EN 60598
- Class I.




Size	HR2	HR3
Diameter	283mm	353mm
Depth	113mm	122mm

HR2/BLL4LED600



HR3/BLL4LED1800



Code	Size	Colour	Diffuser	Colour Temp.	System Power	Estimated Output	Efficiency
HR2/BLL4LED600	283mm	Black	Premium Opal	4000 K	6.2 W	2818 lm	34 lm/W
HR3/BLL4LED1800	353mm	Black	Premium Opal	4000 K	17.8 W	762 lm	42.8 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M
Ex: HR2/BLL4LED600M



Photocell
C



PIR
P



Hi-LO PIR
HILO



Anti-Tamper Screws
T



Metal Base Option
HR3M/