


| Tree schedule               |                 |          |            |                                                                 |
|-----------------------------|-----------------|----------|------------|-----------------------------------------------------------------|
| Tree No                     | Species         | Category | RPA Radius | Tree Works                                                      |
| All retained trees & hedges |                 |          |            | Carry out safety check and lift over site to 3-4m as necessary. |
| H1                          | Laurel          | C        | 1.2        | Fell for development (part)                                     |
| H2                          | Leyland cypress | C        | 3.6        | Fell for development (part)                                     |

Frontage boundary hedgerow to be retained as mature screening.

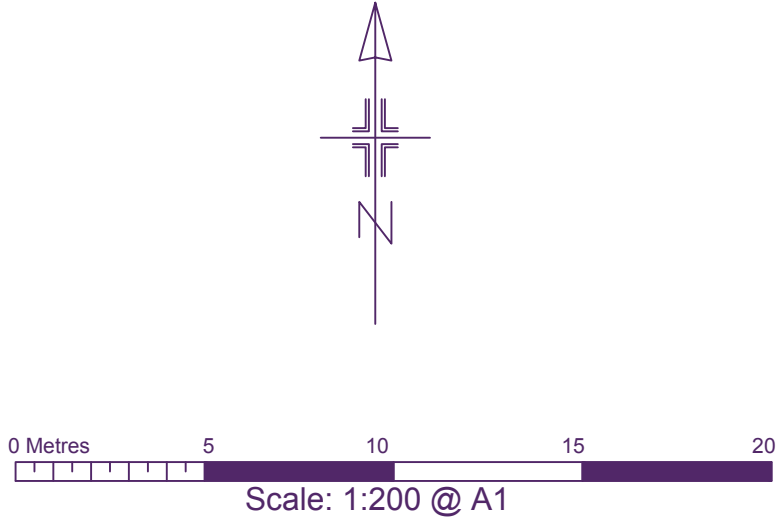

TX

BS category C

Trees of low quality

TX

Trees to be removed

Proposed layout

Protective barrier/fencing

Construction exclusion zone (CEZ)

Root protection area (RPA) boundaries for category C trees

Tree protection plan

Location of trees, categorisation & protection/management proposals at Orchard Business Park, North End road, Yapton, West Sussex

Barrell Plan Ref: 18062-BT1

Provided Plan Refs: ENC/120218/3BB1-Top & 1706 2.10 Rev P3

b

barrell

TREE CONSULTANCY

Permission is granted to scale from this drawing for Local Authority Planning Approval purposes relating to tree protection measures only. Where applicable this drawing is to be read in conjunction with the arboricultural report. This drawing is the copyright of Barrell Tree Consultancy 2018. ©

This drawing to be reproduced in colour only.

www.barrelltreecare.co.uk

SGN 1

Monitoring tree protection

**Always:**

- ✓ have a pre-commencement meeting with the tree consultant before development starts
- ✓ use the tree consultant to regularly check that protection remains fit for purpose
- ✓ use the tree consultant to supervise work in rpas
- ✓ keep a written record of supervision

SGN 2

Fencing protected trees

**Always:**

- ✓ install protection before development starts
- ✓ make sure protection is fit for purpose, i.e. it prevents damage to trees and soil
- ✓ keep protection in place until there is no risk to trees
- ✓ get written permission to move or remove any protection

SGN 4

Pollution control

**Always:**

- ✓ keep toxic products away from RPAs

How to use plan

More detailed guidance on each Site Guidance Note (SGN) can be found in a printed hard copy compilation of all the SGNs, issued to the Site Manager at the pre-commencement site meeting (**Note:** This should be retained on site throughout the duration of works). Additionally, an electronic pdf compilation of all the SGNs, was submitted with this drawing to the local planning authority and the client. Alternatively, a pdf of each SGN can be downloaded by:

1. clicking the image links in the electronic pdf version of this plan;
2. holding a mobile phone QR (Quick Response) code reader over the QR code in the paper version of this plan; or,
3. visiting our website at <https://www.barrelltreecare.co.uk/resources/technical-guidance>

ARUN DISTRICT COUNCIL 1049338PL