




|  |                                                                                                                                                                                                                                                                                |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | PROPOSED FEATHERED TREE, INCLUDING STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.                                                                                                                                                                     |
|  | PROPOSED STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.                                                                                                                                                               |
|  | PROPOSED VERY HIGH STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.                                                                                                                                                     |
|  | PROPOSED EXTRA VERY HIGH STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.                                                                                                                                               |
|  | PROPOSED CONIFER OR BROAD LEAF EVERGREEN TREE, INCLUDING STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.                                                                                                                                               |
|  | SHRUB AND HERBACEOUS PLANTING, INCLUDING BIOGRADEABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). SEE SPECIFICATION NOTES A1-2, B1-3, C1-3, D1-2 AND E1.                                                                                                                |
|  | NATIVE WHIP AND SHRUB PLANTING IN MIXES, INCLUDING BIOGRADEABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). SEE SPECIFICATION NOTES A1-2, B1-3, C1-3, D1-2 AND E1.                                                                                                      |
|  | EDGE PLANTING, INCLUDING BIOGRADEABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). REFER TO EDGE SCHEDULES ON PLAN AND THE SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES A1-2, B1-3, B5, C1-3, D1-2 AND E1.                                                            |
|  | EDGE PLANTING, INCLUDING BIOGRADEABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). REFER TO TIMBER BOARD EDGING TO SEPARATE FROM GRAVEL AREA, REFER TO EDGE SCHEDULES ON PLAN AND THE SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES A1-2, B1-3, B5, C1-3, D1-2 AND E1. |
|  | WASHED, ROUNDED, BUFF COLOURED GRAVEL, 20mm GAUGE, 40mm DEPTH, FINISHED LEVEL 15mm BELOW GRAVEL SURFACES, LAP OVER 'COVERTEK' OVER LIGHTLY CONSOLIDATED SUBGRADE.                                                                                                              |
|  | CULTIVATED TURF AND SEEDED AMENITY GRASS MIX EM22. SEE GENERAL NOTES B4, C5 AND E1.                                                                                                                                                                                            |
|  | GENERAL WILDFLOWER SEEDED AREA MIX EM2. REFER TO PLANT SCHEDULE FOR SPECIFICATION OF MIX.                                                                                                                                                                                      |
|  | WET WILDFLOWER SEEDED AREA MIX EM9. REFER TO PLANT SCHEDULE FOR SPECIFICATION OF MIX.                                                                                                                                                                                          |
|  | BULB PLANTING IN MIXES, SPRING FLOWERING VARIETIES, REFER TO SCHEDULE FOR FURTHER INFORMATION.                                                                                                                                                                                 |
|  | EXISTING GROUND FLOOR TO BE RETAINED AND MANAGED                                                                                                                                                                                                                               |
|  | CLIMBING SHRUB IN SHRUB BEDS, GRASS/ GRAVEL OR PITS IN PLANTING. (SEE PLAN). TWINING VARIETIES (MARKET) SEE NOTE C. SPECIMEN SHRUBS (MARKED) SEE SPECIFICATION NOTES A1 AND E1.                                                                                                |
|  | SPECIMEN SHRUBS IN SHRUB BEDS OR PITS PLANTED IN GRASS/ GRAVEL AREAS, SPECIMEN SHRUBS IN GRASS ARE ARE SPECIFIED SEPARATELY IN SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES A1, B1-3, C1-3, D1-2 AND E1.                                                                    |
|  | EXISTING TREE TO BE RETAINED. SEE GENERAL NOTE A1 AND E1. IF PREPARED, SEE ALSO JAMES BLACK ASSOCIATES PLAN AND SCHEDULE FOR AN SURGERY.                                                                                                                                       |
|  | EXISTING VEGETATION GROUP IF PREPARED TO BE RETAINED. SEE GENERAL NOTE A1 AND E1. IF PREPARED, SEE ALSO JAMES BLACK ASSOCIATES PLAN AND SCHEDULE FOR ANY SURGERY.                                                                                                              |
|  | AREA OF GRASS TO BE REINFORCED WITH NETLON TURF GUARD XN705 - 9000 TO MAINTAINANCE ACCESS, AVAILABLE FROM TOP TEL (01202) 612011.                                                                                                                                              |
|  | SAWN SOFTWOOD TIMBER POST TO METAL KNEERAIL, POST TO BE 450mm HIGH, TO BE ACQ TREATED AND STAINED WITH 2% COATS OF SADOUL 'CLASSIC' COLOUR 'VALNUT' WITH REMOVABLE METAL RAIL FOR MAINTENANCE OR SIMILAR AND APPROVED.                                                         |
|  | 1.2M HIGH SAWN SOFTWOOD TIMBER POST AND THREE BAR RAIL WITH CHICKEN WIRE MESH INFILL NEAR TO SOUTHERN LAP. WOOD TO BE ACQ TREATED AND STAINED WITH 2% COATS OF SADOUL 'CLASSIC' COLOUR 'VALNUT' WITH REMOVABLE RAIL FOR MAINTENANCE.                                           |
|  | BOW TOP RAILINGS WITH MATCHING GATE, COLOUR 'BLACK' (MID-HIGH PARLAND), 0.9M HIGH RESIDENTIAL, FRONTAGES, BY DEVELOPER.                                                                                                                                                        |
|  | FOOTPATHS, HOGGIN SURFACING, COMPACTED MOT AND ROLLED GRAVEL, WITH PEGS AND THICKENING DEPTHS TO LAP. OVER FIRMED SUB-GRADE AND GEOTEXTILE - TERRAM 100, ALL TO FALLS TO CROSSFALLS, MINIMUM 170                                                                               |
|  | ALLOW FOR RE-ROOT 1000 ROOT BARRIER (DEPT 1m) AVAILABLE FROM GREENSLUE, MANUFA OR SIMILAR AND APPROVED TO BE CONSTRUCTED TO MANUFACTURER'S SPECIFICATIONS.                                                                                                                     |

NOTE  
SEE SEPARATE EXTERNAL LAYOUT DRAWINGS (BY DEVELOPER) FOR  
SPECIFICATIONS AND ARRANGEMENT OF FENCING AND OTHER HARD WORKS  
FOR PLANT SCHEDULE. SPECIFICATION NOTES & LOCATION PLAN PLEASE REFER  
TO DRAWING NO. JBA19/291-010  
PLAY AREA EQUIPMENT INCLUDING SAFETY MATTA  
SURFACING BY MIRACLE PLAY TEL. 01604 658240:

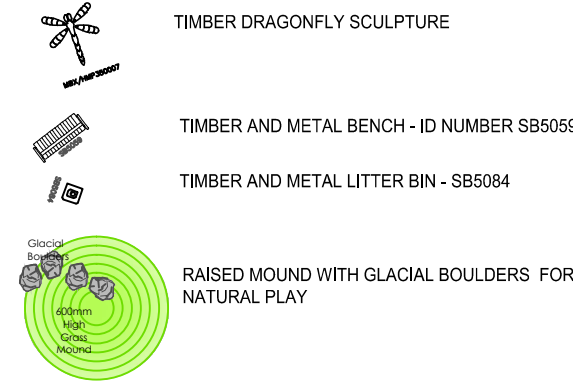

DUE TO NATIONAL PLANT SHORTAGE: PLANTS MAY TAKE UP TO 4 WEEKS TO BE DELIVERED. EARLY LEAD-IN FOR SOFT LANDSCAPE IS ESSENTIAL.

[illegible]

**JAMES BLAKE**  
A S S O C I A T E S

The Black Barn, Hill Road, Lavenham, Suffolk, CO10 9DX  
Tel: (01787) 248516 Fax: (01787) 247264  
jamesblake@jba-landmarc.com www.jba-landmarc.com

LANDSCAPE ARCHITECTURE • ARBORICULTURE • ECOLOGY