




EXISTING GROUND FLORA
TO BE RETAINED AND
MANAGED

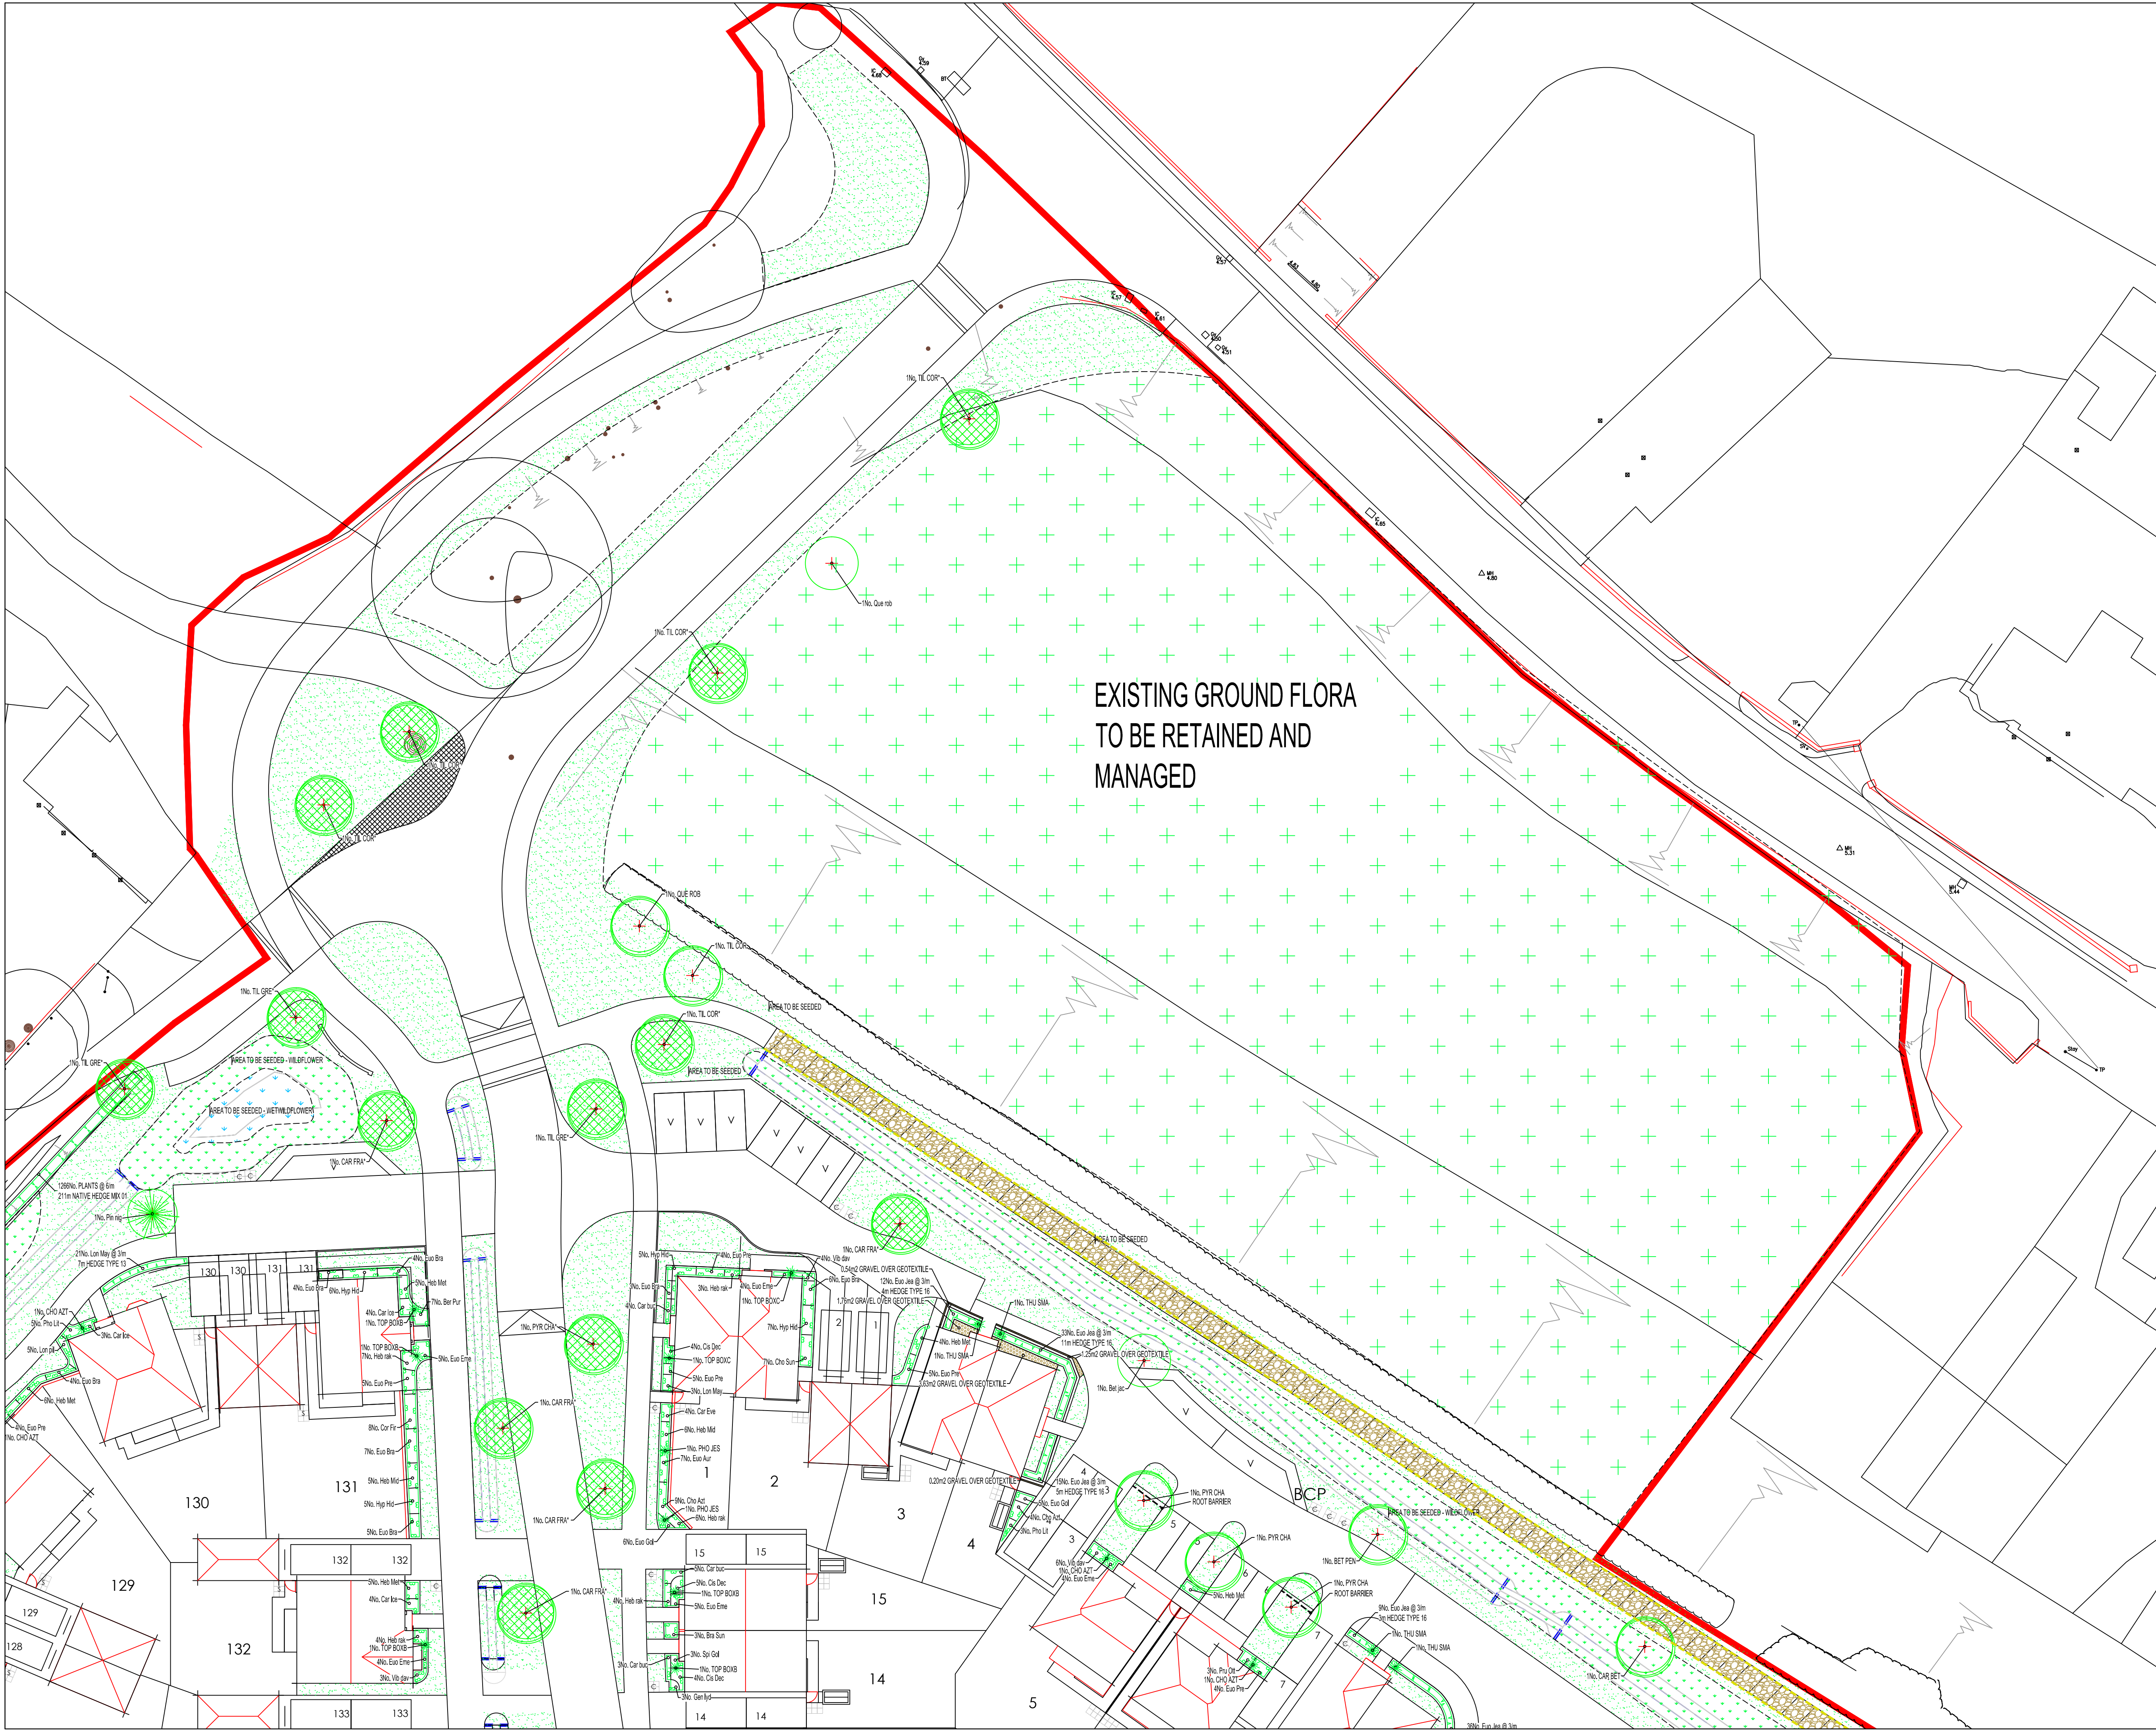

- KEY**
- PROPOSED FEATHERED TREE, INCLUDING STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.
 - PROPOSED STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.
 - PROPOSED HEAVY STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.
 - PROPOSED EXTRA HEAVY STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.
 - PROPOSED CONIFER OR BROAD LEAF EVERGREEN TREE, INCLUDING STAKE AND TIE. SEE SPECIFICATION NOTES A1, B2-3, B5, C1-4, D1-2 AND E1.
 - SHRUB AND HERBACEOUS PLANTING, INCLUDING BIODEGRADABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). SEE SPECIFICATION NOTES A1-2, B1-3, C1-3, D1-2 AND E1.
 - NATIVE WHIP AND SHRUB PLANTING IN MIXES, INCLUDING BIODEGRADABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). SEE SPECIFICATION NOTES A1-2, B1-3, C1-3, D1-2 AND E1.
 - HEDGE PLANTING, INCLUDING BIODEGRADABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION). REFER TO HEDGE SCHEDULES ON PLAN AND THE SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES A1-2, B1-3, B5, C1-3, D1-2 AND E1.
 - HEDGE PLANTING, INCLUDING BIODEGRADABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION) INCLUDING TIMBER BOARD EDGING TO SEPARATE FROM GRAVEL AREA. REFER TO HEDGE SCHEDULES ON PLAN AND THE SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES A1-2, B1-3, B5, C1-3, D1-2 AND E1.
 - WASHED, ROUNDED, BUFF COLOURED GRAVEL, 20mm GAUGE, 40mm DEPTH, FINISHED LEVEL 15mm BELOW ADJACENT SURFACES. LAY OVER 'COVERTEX' OVER LIGHTLY CONSOLIDATED SUBGRADE.
 - CULTIVATED TURF AND SEEDED AMENITY GRASS MIX EM22. SEE SPECIFICATION NOTES B4, C5 AND E1.
 - GENERAL WILDFLOWER SEEDED AREA MIX EM2. REFER TO PLANT SCHEDULE FOR SPECIFICATION OF MIX.
 - WET WILDFLOWER SEEDED AREA MIX EM8. REFER TO PLANT SCHEDULE FOR SPECIFICATION OF MIX.
 - BULB PLANTING IN MIXES, SPRING FLOWERING VARIETIES. REFER TO SCHEDULE FOR FURTHER INFORMATION.
 - EXISTING GROUND FLORA TO BE RETAINED AND MANAGED
 - CLIMBING SHRUB IN SHRUB BEDS, GRASS/ GRAVEL OR IN PITS IN PAVING. (SEE PLAN). TWINING VARIETIES (MARKED) SEE NOTE C7. SELF CLIMBING VARIETIES (MARKED) SEE NOTE C8. SEE SPECIFICATION NOTES C1-3, C8, D1-2 AND E1.
 - SPECIMEN SHRUBS IN SHRUB BEDS OR PIT PLANTED IN GRASS/ GRAVEL AREAS. SPECIMEN SHRUBS IN GRASS ARE MEASURED SEPARATELY IN SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES A1, B1-3, C1-3, D1-2 AND E1.
 - EXISTING TREE TO BE RETAINED. SEE GENERAL NOTE A1 AND E1, IF PREPARED. SEE ALSO JAMES BLAKE ASSOCIATES PLAN AND SCHEDULE FOR ANY SURGERY WORKS.
 - EXISTING VEGETATION GROUP OR HEDGE TO BE RETAINED. SEE GENERAL NOTE A1 AND E1, IF PREPARED. SEE ALSO JAMES BLAKE ASSOCIATES PLAN AND SCHEDULE FOR ANY SURGERY WORKS.
 - AREA OF GRASS TO BE REINFORCED WITH NETLON TURF/GRASS MAT. SEE SPECIFICATION NOTES A1, B1-3, C1-3, D1-2 AND E1.
 - SAWN SOFTWOOD TIMBER POST WITH METAL KNEERAIL. POST TO BE 50mm HIGH, TO BE ACO TREATED AND STAINED WITH 2% COATS OF SADDOLIN CLASSIS COLOUR 'WALNUT' WITH REMOVABLE METAL RAIL FOR MAINTENANCE OR SIMILAR AND APPROVED.
 - 1.2M HIGH SAWN SOFTWOOD TIMBER POST AND THREE BAR RAIL WITH CHICKEN WIRE MESH INFILL. NEAR TO SOUTHERN LAP. WOOD TO BE ACO TREATED AND STAINED WITH 2% COATS OF SADDOLIN CLASSIS COLOUR 'WALNUT' WITH REMOVABLE RAIL FOR MAINTENANCE.
 - BOW TOP RAILINGS WITH MATCHING GATE. COLOUR 'BLACK'. (1M HIGH-PARKLAND, 0.9M HIGH RESIDENTIAL FRONTAGES), BY DEVELOPER.
 - FOOTPATHS, HOGGIN SURFACING, COMPACTED MOT AND ROLLED GRAVEL WITH PEGS AND TIMBER EDGING. DEPTHS TO LAY OVER FIRMED SUB-GRADE AND GEOTEXTILE - TERRAM 1000, ALL TO FALLS AND CROSSFALLS, MINIMUM 1:10.
 - ALLOW FOR REAR 600 ROOT BARRIER (DEPTH 1m) AVAILABLE FROM GREENBLUE URBAN OR SIMILAR AND APPROVED. TO BE CONSTRUCTED TO MANUFACTURERS SPECIFICATIONS.

NOTE
SEE SEPARATE EXTERNAL LAYOUT DRAWINGS (BY DEVELOPER) FOR SPECIFICATIONS AND ARRANGEMENT OF FENCING AND OTHER HARD WORKS
FOR PLANT SCHEDULE, SPECIFICATION NOTES & LOCATION PLAN PLEASE REFER TO DRAWING NO. JBA19291-010

LANDSCAPE PROGRAMMING
DUE TO NATIONAL PLANT SHORTAGE, PLANTS MAY TAKE UP TO 4 WEEKS TO BE DELIVERED. EARLY LEAD-IN FOR SOFT LANDSCAPE IS ESSENTIAL.

REV	DATE	DETAILS	DETAILS
1	15/07/2020	ISSUED FOR CLIENT REVIEW	ISSUED FOR CLIENT REVIEW
2	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
3	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
4	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
5	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
6	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
7	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
8	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
9	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS
10	15/07/2020	REVISED TO REFLECT CLIENT COMMENTS	REVISED TO REFLECT CLIENT COMMENTS

JAMES BLAKE ASSOCIATES
The Black Barn, Hill Road, Lavenham, Suffolk, CO10 9XQ
Tel: (01787) 242216 Fax: (01787) 247284
james.blake@jba-landscapes.com www.jba-landscapes.com

LANDSCAPE ARCHITECTURE • ARBORICULTURE • ECOLOGY