
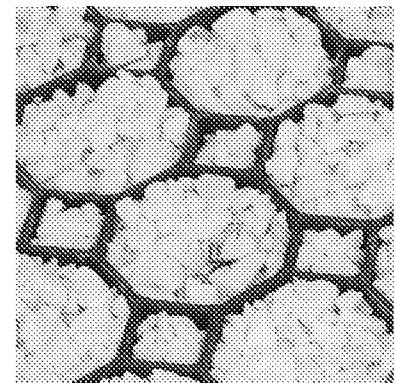


**BODPAVE™ 40 cellular
porous pavers**

Product Data Sheet

Issue: 02 Date: 08.07.17

Characteristics	
Load-bearing capacity (filled)	150 t/m ²
Connection type	Edge spike & loop
Basal support & anti shear	Four 25mm long spikes per paver
Dimensions	500mm x 500mm x 40mm deep plus 25mm long spikes
Cell wall thickness	2.7mm - 3.2mm
Nominal internal cell dimensions	60mm octagonal
% open cell	95% (top)/75% (base)
Quantity per m ²	4 pavers
Weight	1.2kg (4.8kg/m ²)
Polymer	Recycled and Recyclable high density polyethylene
Colour	Black/Green*
Chemical resistance	Excellent
UV resistance	High
Toxicity	Non toxic

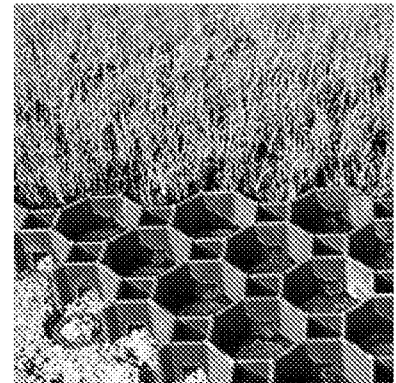

* Please note that when using recycled HDPE it is difficult to maintain colour consistency across single green pavers, and from one green paver to another.

As part of its continual improvement process Fiberweb Geosynthetics Ltd reserve the right to change the properties listed on this data sheet without prior notice.

TM indicates a trade mark of Fiberweb plc or Berry Global, many of which are registered in a number of countries around the world.