

Project Name : Burndell Road, Yapton
Job No : 18-070
Note Title : Drainage Strategy Technical Note
Author : Luke Phillips
Checked : Luke Hart
Approved : Ryan Saul
Date : July 2019

1.0 INTRODUCTION

1.1 Odyssey have been instructed by Bovis Homes to prepare this drainage technical note in support of their Reserved Matters (RM) application for the residential development at Burndell Road, Yapton. This follows the grant of outline planning permission on 13th October 2017 (Ref: Y/19/16/OUT)

1.2 The description of the development at the outline application was:

“Outline application for the development of a maximum of 108 No. residential dwellings, vehicular access from Burndell Road, public open space, ancillary works & associated infrastructure.”

1.3 The aim of this report is to support the discharge of Conditions 5, 6, and 24, which are set out below:

Condition 5

“Development shall not commence until full details of the proposed surface water drainage scheme, including maintenance and management, have been submitted to and approved in writing by the Local Planning Authority. No building shall be occupied until the complete surface water drainage system serving that property has been implemented in accordance with the agreed details and the details so agreed shall be maintained in accordance with the scheme in perpetuity.”

Condition 6

“Prior to the commencement of construction works details of a proposed foul drainage system shall be submitted to an approved in writing by the local planning authority. This shall include details of its siting, design and subsequent management/ maintenance. No dwelling shall be occupied until works for the disposal of sewage have been fully implemented in accordance with the approved details.”

Condition 24

“No part of the development shall be first occupied until provision has been made within the site in accordance with plans and details to be submitted to and approved by the local planning authority to prevent surface water draining onto the public highway.”

2.0 EXISTING SITE

- 2.1 The proposed development site comprises of 3.87ha of greenfield land, located South of an existing residential development fronting Burndell Road and Fellows Gardens. The site is relatively flat with a fall of approximately 1.2m across the site from North to South.
- 2.2 The existing drainage regime relies on surface water infiltrating through the underlying strata, with any excess runoff discharging into the network of ditches abutting the site's southern boundary.
- 2.3 There are no public surface water sewers in close proximity to the site.
- 2.4 Existing geology maps and further borehole testing has proven that the underlying geology consists predominantly of sandy, gravelly clay above the Upper Chalk Formation. Making the site unsuitable for the use of an infiltrating surface water drainage strategy.
- 2.5 Furthermore, infiltration testing carried out proved that the geology of the ground has poor permeability, and therefore the use of any infiltrating SuDS features would not be a viable option for this site.
- 2.6 There are no existing foul water sewers present within the site. The nearest public foul water sewer is located in Burndell Road and currently serves the existing residential developments on Park Drive and Fairholme Drive.
- 2.7 In order to safeguard against potential flooding from the surrounding ditches, all structures have been located a minimum of five metres away from the top of any existing ditch bank.

3.0 PROPOSED SURFACE WATER DRAINAGE STRATEGY

- 3.1 The surface water drainage strategy for the proposed development is shown on the drawing listed below which can be found in **Appendix A**:
- 18-070/103 – Preliminary Engineering Layout
- 3.2 The surface water drainage strategy has been designed in accordance with the strategy set out in the Odyssey Flood Risk Assessment (FRA) submitted as part of the outline planning application for the site. The FRA detailed the need for cellular storage attenuation crates, an attenuation basin, and lined permeable paving systems in order to provide surface water storage and treatment, prior to discharging into the ditches surrounding the site.
- 3.3 The surface water drainage system has been designed to accommodate all rainfall events up to the 1 in 100 year event plus climate change (+40%.) Supporting calculations can be found within **Appendix C**.
- 3.4 During extreme events, excess flood waters will be predominantly conveyed within the carriageways to the ditches and open space to the East and South of the site. The overland flow routes can be found on drawing **18-070/105** appended in **Appendix B**.
- 3.5 The proposed drainage strategy splits the development into 4 separate sub-catchments. The Northern catchment drains to the East and utilises an offline cellular storage tank combined with flow control device in order to manage the stormwater. This catchment then discharges into the Eastern ditch at a rate of 7.0 l/s.
- 3.6 The three Southern catchments each drain to a separate cellular storage attenuation tank prior to discharging into the attenuation basin located within the South West of the site. The surface water is discharged from each cellular storage crate at a controlled rate, before being conveyed through the basin and discharged into the Southern ditch at a rate of 7.0 l/s.
- 3.7 Generated surface water run-off from roofs and private driveways will be conveyed through permeable paving systems and private pipe networks to the main sewer network. All highway drainage will be captured with trapped road gullies that discharge into the main sewer network.
- 3.8 The permeable paving will also ensure that any surface water generated by roofs and private driveways will be contained within the private drainage network without draining onto the public highway.

- 3.9 The main sewer network will then convey the surface water to the respective attenuation feature before it is discharged at a combined rate of 14 l/s as previously agreed at the outline planning stage. The discharge rates proposed are listed within the table below;

	Discharge Rate
Northern Catchment	7.0 l/s
Southern Catchment	7.0 l/s
Total	14.0 l/s

- 3.10 Surface water treatment will be provided by the permeable paving via both the grit layer and geotextile that the blocks are bedded on, as well as the underlying gravel media comprising of washed no-fines material. These measures provide filtration and the breakdown of hydrocarbons as the water is conveyed through the system and into the piped network.
- 3.11 The proposed attenuation basin will also provide treatment through the surface vegetation and ground cover. Nutrients, oils/grease, and metals can all be removed through filtration via the vegetated basins.
- 3.12 The proposed permeable paving and attenuation basin combined with trapped gullies and catchpits that form part of the piped network will provide sufficient treatment of the surface water prior to discharge into the existing ditches.

4.0 PROPOSED FOUL WATER DRAINAGE STRATEGY

4.1 The foul water drainage strategy for the proposed development is shown on the drawing listed below which can be found in **Appendix A:**

- 18-070/103 – Preliminary Engineering Layout

4.2 The foul water drainage strategy has been designed in accordance with strategy set out in the Odyssey FRA submitted as part of the outline planning application for the site.

4.3 All foul effluent created by the development is to be discharged through private foul water sewer networks into the main foul water sewer network that runs through the site.

4.4 These main sewers have been designed in accordance with Sewers for Adoption 7th Edition.

4.5 All foul effluent is to be discharged to the pumping station located towards the South West corner of the site. It will then be pumped via rising main to the North before discharging into the existing Southern Water manhole 2003 in Burndell Road.

5.0 PROPOSED MANAGEMENT AND MAINTENANCE

- 5.1 All foul and surface water sewer networks shown on drawing **18-070/103** are to be offered for adoption by Southern Water and as such will be maintained by Southern Water in accordance with their maintenance and management program.
- 5.2 Any surface water drainage systems that take highway drainage only, will be offered for adoption by West Sussex County Council and as such will be maintained by West Sussex County Council in accordance with their maintenance and management program.
- 5.3 Any drainage solely serving an individual property and located within the property curtilage will be maintained by the property owner. A covenant will be imposed to ensure that the appearance and materials used in the construction of the permeable parking bays are not altered in any way.
- 5.4 Any drainage features not offered for adoption, including the cellular storage attenuation crates and the attenuation basin, are to be maintained by a private management company in accordance with the following schedule and any recommendations made by manufacturers.

Permeable Paving

Maintenance Category	Maintenance Activity	Comments	Frequency
Routine Maintenance	Visual inspection of paving.	Ensure joints are kept fully filled.	Monthly (depending on local environment)
	Paving should be agitated (e.g. brushed, vacuumed, etc.)	To ensure no vegetation of any sort is allowed to grow and develop in the joints.	Six monthly or as required (Spring and Autumn seasons).
	Paving should be inspected after any heavy precipitations.	Ensure no displacement of any organic matter into the surface of the pavement.	As required.
Corrective Maintenance	Inspection of outfall should be undertaken.	Non-infiltration systems to have outfall checked for debris and blockages.	Six monthly or as required.
	Removal of weeds.	To ensure weeds are killed effectively they should be actively growing so that the glyphosate will go down to the roots. Glyphosate based weed killers include Roundup and Tumbleweed.	As required.
	Laying material may require cleaning and /or replacing.	Depending on the environment the permeable pavement has received and been exposed to.	25 to 30-year period.

Pipe Systems, Gullies, and Manholes

Maintenance Category	Maintenance Activity	Comments	Frequency
Routine Maintenance	Inspect and identify any areas that are not operating correctly.	Gullies and private manholes and inspection chambers	Monthly (for the first 3 months) then annually.
	Remove debris from gratings, sumps / silt traps.		Annually
Infrequent Maintenance	Clear blockages.	Piped system.	As required.

Cellular Storage Attenuation Tanks

Maintenance Category	Maintenance Activity	Comments	Frequency
Routine Maintenance	Inspect and identify any areas that are not operating correctly.		Monthly (for the first 3 months) then six monthly.
	Remove sediment from upstream and downstream catchpits.	Remove sediment from sump when 50% volume lost.	Six monthly, or as required.
Infrequent Maintenance	Clear blockage via distribution pipe by rodding / jetting via catchpits.		As required.
Corrective Maintenance	Membrane repair.	Membrane to be repaired in accordance with manufactures details.	As required.

Concrete Storage Attenuation Tanks

Maintenance Category	Maintenance Activity	Comments	Frequency
Routine Maintenance	Inspect and identify any areas that are not operating correctly.		Monthly (for the first 3 months) then six monthly.
	Remove sediment from tank floor.	Silt pump should be placed temporarily within a downstream sump/silt trap during maintenance works.	Annually, or as required.
Infrequent Maintenance	Clear blockage by rodding / jetting via catchpits or jetting from within tank itself.		As required.

Attenuation Basin

Maintenance Category	Maintenance Activity	Comments	Frequency
Routine Maintenance	Litter picking and general	Ensure a free-flowing water route is observed	Three times/year at end of winter, mid-summer, after autumn leaf fall, or as required based on site-specific observations of clogging.
Infrequent Maintenance	Stabilise and mow contributing and adjacent grass		As required.
	Removal of weeds		As required
	Remediation works of any landscaping or any other component that is deemed to have an adverse impact on the flow path		As required
	Remove sediment from inlets, outlet and forebay		As required

Flow Control Devices

Maintenance Category	Maintenance Activity	Comments	Frequency
Routine Maintenance	Inspect and identify any areas that are not operating correctly.		Monthly (for the first 3 months) then six monthly.
	Remove sediment from upstream silt trap (sump).		Six monthly, or as required.
	Hose down unit / chamber		Six monthly, or as required.
Infrequent Maintenance	Clear blockages		As required.


Inspection Activity	Comments	Frequency
Inspect all inlets / outlets, to check they are in good condition and operating as designed.		Annually.

6.0 CONCLUSION

- 6.1 This technical note has provided details of the proposed surface water and foul water drainage systems proposed within the proposed development at Burndell Road, Yapton.
- 6.2 This technical note, combined with other documents submitted as part of the Reserved Matters application provides the detail required to discharge Conditions 5, 6, and 24.
- 6.3 This note has demonstrated how the proposals accord with the FRA, NPPF and local Planning Policies with regards to surface and foul water drainage.

APPENDIX A

Odyssey Preliminary Engineering Layout

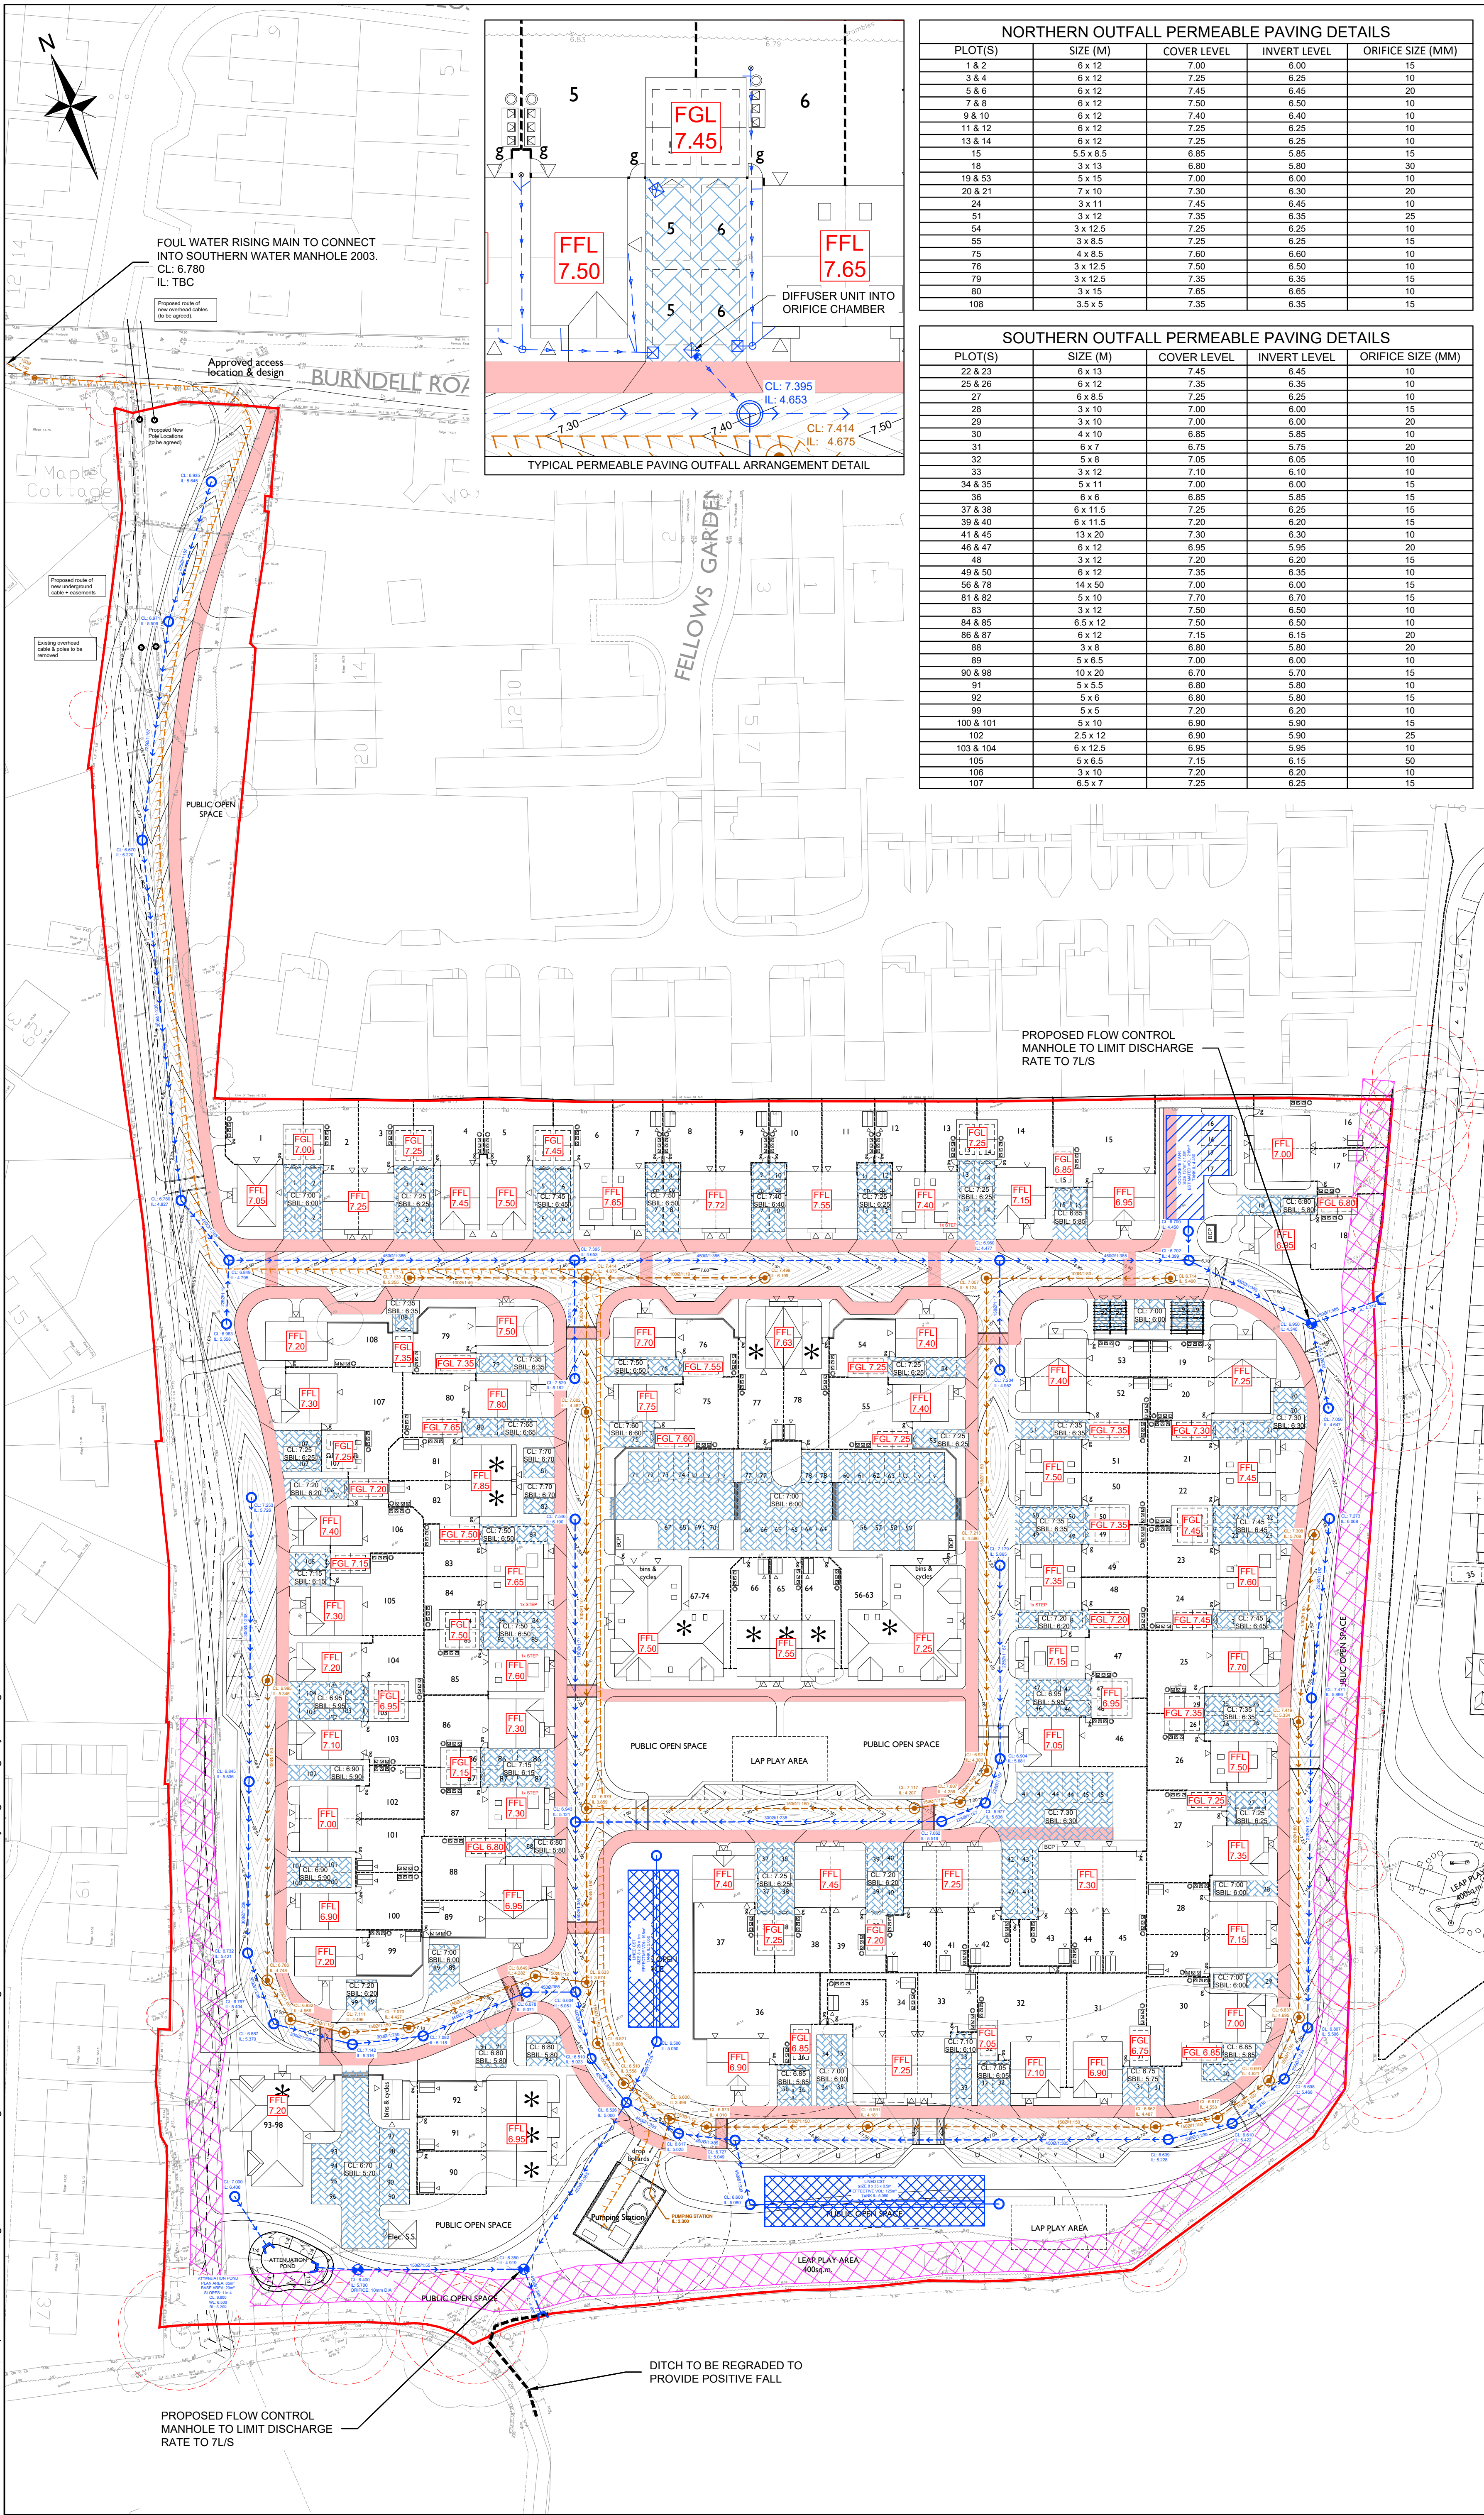

NORTHERN OUTFALL PERMEABLE PAVING DETAILS				
PLOT(S)	SIZE (M)	COVER LEVEL	INVERT LEVEL	ORIFICE SIZE (MM)
1 & 2	6 x 12	7.00	6.00	15
3 & 4	6 x 12	7.25	6.25	10
5 & 6	6 x 12	7.45	6.45	20
7 & 8	6 x 12	7.50	6.50	10
9 & 10	6 x 12	7.40	6.40	10
11 & 12	6 x 12	7.25	6.25	10
13 & 14	6 x 12	7.25	6.25	10
15	5.5 x 8.5	6.85	5.85	15
18	3 x 13	6.80	5.80	30
19 & 53	5 x 15	7.00	6.00	10
20 & 21	7 x 10	7.30	6.30	20
24	3 x 11	7.45	6.45	10
51	3 x 12	7.35	6.35	25
54	3 x 12.5	7.25	6.25	10
55	3 x 8.5	7.25	6.25	15
75	4 x 8.5	7.60	6.60	10
76	3 x 12.5	7.50	6.50	10
79	3 x 12.5	7.35	6.35	15
80	3 x 15	7.65	6.65	10
108	3.5 x 5	7.35	6.35	15

SOUTHERN OUTFALL PERMEABLE PAVING DETAILS				
PLOT(S)	SIZE (M)	COVER LEVEL	INVERT LEVEL	ORIFICE SIZE (MM)
22 & 23	6 x 13	7.45	6.45	10
25 & 26	6 x 12	7.35	6.35	10
27	6 x 8.5	7.25	6.25	10
28	3 x 10	7.00	6.00	15
29	3 x 10	7.00	6.00	20
30	4 x 10	6.85	5.85	10
31	6 x 7	6.75	5.75	20
32	5 x 8	7.05	6.05	10
33	3 x 12	7.10	6.10	10
34 & 35	5 x 11	7.00	6.00	15
36	6 x 6	6.85	5.85	15
37 & 38	6 x 11.5	7.25	6.25	15
39 & 40	6 x 11.5	7.20	6.20	15
41 & 45	13 x 20	7.30	6.30	10
46 & 47	6 x 12	6.95	5.95	20
48	3 x 12	7.20	6.20	15
49 & 50	6 x 12	7.35	6.35	10
56 & 78	14 x 50	7.00	6.00	15
81 & 82	5 x 10	7.70	6.70	15
83	3 x 12	7.50	6.50	10
84 & 85	6.5 x 12	7.50	6.50	10
86 & 87	6 x 12	7.15	6.15	20
88	3 x 8	6.80	5.80	20
89	5 x 6.5	7.00	6.00	10
90 & 98	10 x 20	6.70	5.70	15
91	5 x 5.5	6.80	5.80	10
92	5 x 6	6.80	5.80	15
99	5 x 5	7.20	6.20	10
100 & 101	5 x 10	6.90	5.90	15
102	2.5 x 12	6.90	5.90	25
103 & 104	6 x 12.5	6.95	5.95	10
105	5 x 6.5	7.15	6.15	50
106	3 x 10	7.20	6.20	10
107	6.5 x 7	7.25	6.25	15

- NOTES
- REPRODUCED FROM ORDNANCE SURVEY (®) BY THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. ALL RIGHTS RESERVED. LICENCE NUMBER 100045322.
- DO NOT SCALE FROM THIS DRAWING. WORK FROM FIGURED DIMENSIONS ONLY.
 - ALL DIMENSIONS SHOWN ON THIS DRAWING ARE IN METRES.
 - THIS DRAWING IS A PRELIMINARY REVIEW ONLY AND SUBJECT TO DETAILED DESIGN.
 - TOPOGRAPHICAL SURVEY HAS BEEN TAKEN FROM DIGITAL TERRAIN SURVEYS DRAWING DTS220414-7Q1B, DATED JANUARY 19'.
 - ODYSSEY ACCEPT NO LIABILITY FOR THE ACCURACY OF SURVEY INFORMATION AND LAYOUTS SUPPLIED BY OTHERS.
 - MASTERPLAN IS BASED ON URBAN PULSE DESIGN SITE PLAN DRAWING 18-1065-005D DATED 03/04/19.
 - FOR OVERLAND FLOW ROUTES REFER TO ODYSSEY DRAWING 18-070/105.
 - FOR LANDSCAPING DETAILS, REFER TO LANDSCAPE ARCHITECTS DRAWINGS.
 - ALL PERMEABLE PAVING TO HAVE A DEPTH OF 1m.

- LEGEND
- SITE BOUNDARY
 - PROPOSED FINISHED FLOOR LEVEL (mAOD)
 - PROPOSED FINISHED GARAGE LEVEL (mAOD)
 - EXISTING LEVEL (mAOD). SEE NOTE 5.
 - PROPOSED HIGHWAY CONTOURS.
 - FOUL SEWER AND MANHOLE (GRADIENT/PIPE SIZE)
 - SURFACE WATER SEWER AND MANHOLE (GRADIENT/PIPE SIZE)
 - FLOW CONTROL CHAMBER
 - PROPOSED CELLULAR STORAGE ATTENUATION TANK
 - PROPOSED CONCRETE STORAGE ATTENUATION TANK
 - PROPOSED HEADWALL
 - FOUL RISING MAIN
 - 5m BUFFER FROM TOP OF EMBANKMENT
 - 15m CLEARANCE FROM CENTRE OF PUMPING STATION WET WELL
 - PERMEABLE PAVING
 - INDICATIVE SERVICE CORRIDOR
 - TREE ROOT PROTECTION ZONE
 - EXTENT OF DITCH TO BE REGRADED

K	CELLULAR STORAGE TANK REPLACED WITH CONCRETE TANK	SG	LH	LH	24.07.19
J	PERMEABLE PAVING AND ORIFICE DETAILS	JA	SG	LH	12.07.19
H	DRAINAGE UPDATED AS PER ARUN DC COMMENTS	SG	LH	LH	25.06.19
G	DRAINAGE UPDATED AS PER ARUN DC COMMENTS	JA	SG	LH	20.06.19
F	DRAINAGE UPDATED AS PER ARUN DC COMMENTS	JA	LH	LH	07.06.19
E	DRAINAGE UPDATED AS PER ARUN DC COMMENTS	JA	SG	LH	16.05.19
D	DRAINAGE UPDATED AND TYPICAL DETAIL	JA	LH	LH	26.04.19
C	SITE LAYOUT UPDATED	SG	LH	LH	05.04.19
B	SITE LAYOUT UPDATED	TSB	SG	LH	21.02.19
A	PLANNING ISSUE	JA	LH	RS	23.11.18
Rev	Amendments	Dm	Chk	App	Date

ODYSSEY


Tuscany House
White Hart Lane
Basingstoke
Hampshire RG21 4AF

Telephone: 01256 331144
Fax: 01256 331134
E: info@odysseyconsult.co.uk
W: www.odysseyconsult.co.uk

Job Title			
LAND SOUTH OF BURNDELL ROAD, YAPTON			
Drawing Title			
PRELIMINARY ENGINEERING LAYOUT			
Client			
BOVIS HOMES			
Scale	Date	Designed	SG
1:500 @A1	NOV 18		
Drawn	Checked	Approved	RS
SOM	LH		
Job No	Drawing No	Rev	
18-070	18-070/103	K	

APPENDIX B

Odyssey Overland Flow Routes

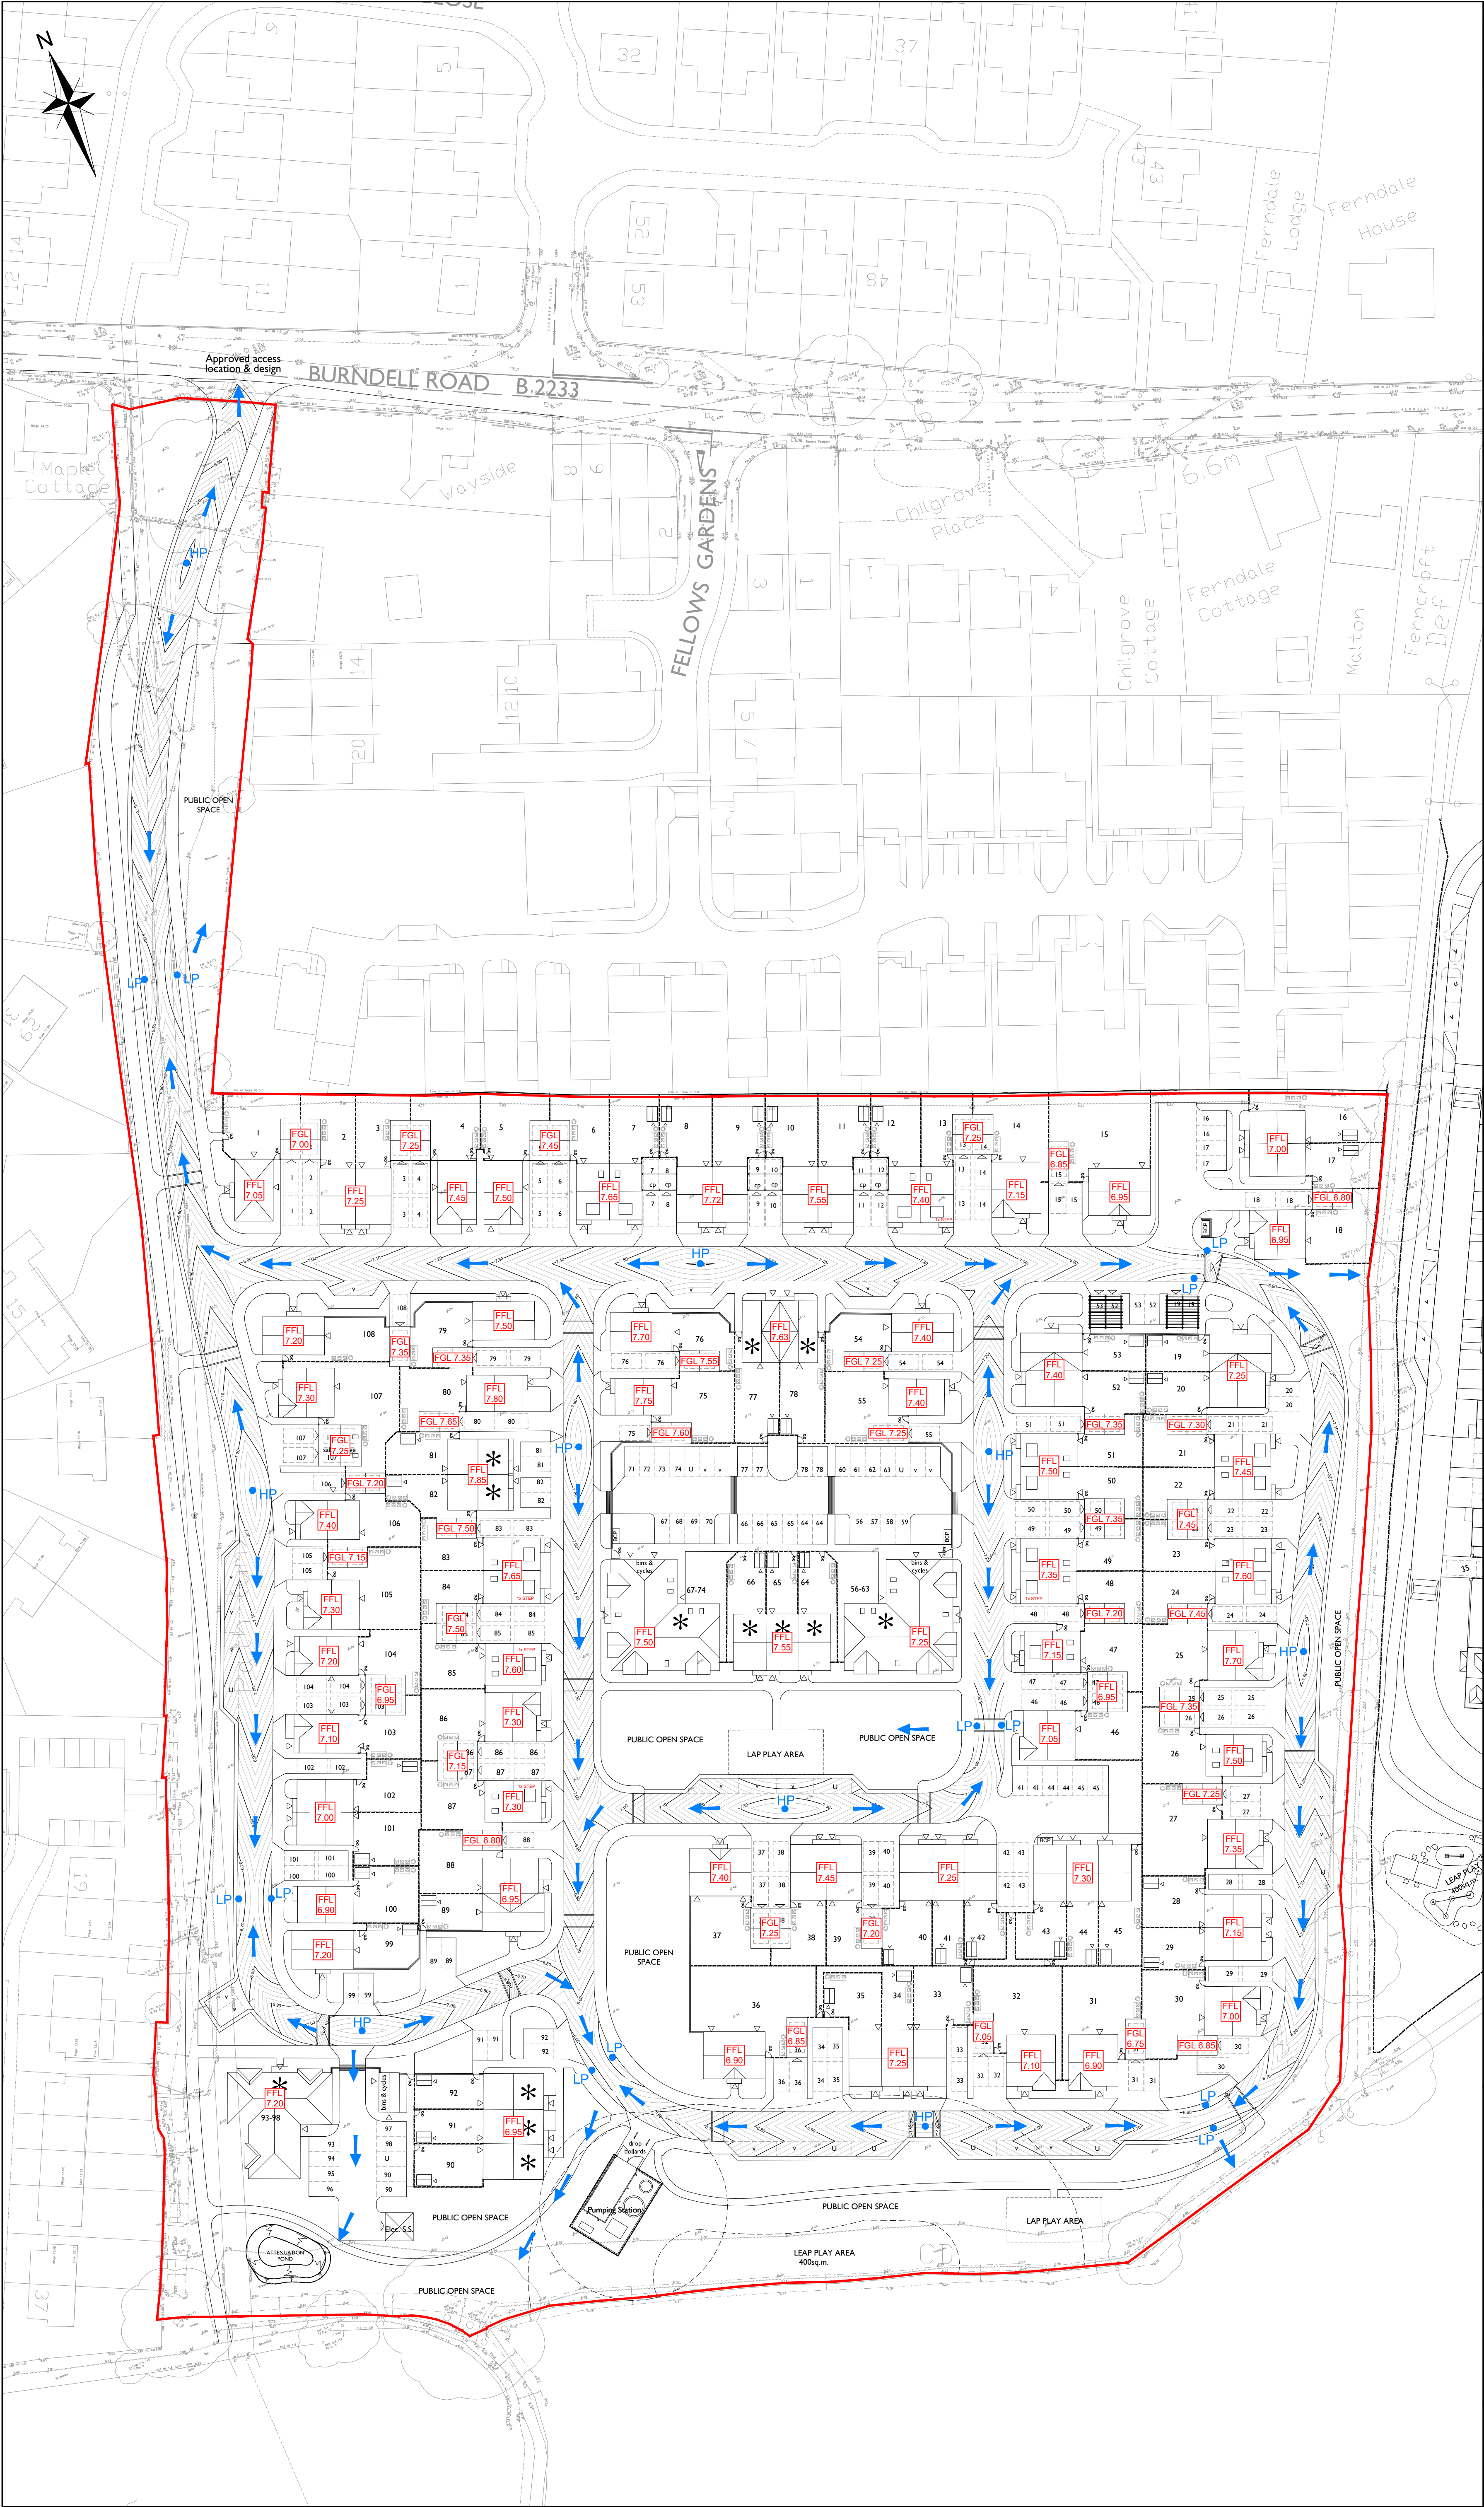

NOTES

REPRODUCED FROM ORDNANCE SURVEY (®) BY THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. ALL RIGHTS RESERVED. LICENCE NUMBER 100045322.

- DO NOT SCALE FROM THIS DRAWING. WORK FROM FIGURED DIMENSIONS ONLY.
- ALL DIMENSIONS SHOWN ON THIS DRAWING ARE IN METRES.
- THIS DRAWING IS A PRELIMINARY REVIEW ONLY AND SUBJECT TO DETAILED DESIGN.
- TOPOGRAPHICAL SURVEY HAS BEEN TAKEN FROM DIGITAL TERRAIN SURVEYS DRAWING DTS220414-7Q1B, DATED JANUARY 19'.
- ODYSSEY ACCEPT NO LIABILITY FOR THE ACCURACY OF SURVEY INFORMATION AND LAYOUTS SUPPLIED BY OTHERS.
- MASTERPLAN IS BASED ON URBAN PULSE DESIGN SITE PLAN DRAWING 18-1065-005D DATED 03/04/19.
- FOR PROPOSED SURFACE WATER DRAINAGE LAYOUT REFER TO ODYSSEY DRAWING 18-070/103.

LEGEND

- SITE BOUNDARY
- PROPOSED FINISHED FLOOR LEVEL (mAOD)
- PROPOSED FINISHED GARAGE LEVEL (mAOD)
- EXISTING LEVEL (mAOD). SEE NOTE 5.
- PROPOSED HIGHWAY CONTOURS.
- INDICATIVE DIRECTION OF OVERLAND FLOW
- LOW POINT
- HIGH POINT

FOR PLANNING PURPOSES ONLY

D ATTENUATION POND AMENDED	SG	LH	LH	25.06.19	
C SITE LAYOUT UPDATED	SG	LH	LH	05.04.19	
B SITE LAYOUT UPDATED	TSB	SG	LH	21.02.19	
A PLANNING ISSUE	JA	LH	RS	23.11.18	
Rev	Amendments	Drm	Chk	App	Date

ODYSSEY

Tuscany House
White Hart Lane
Basingstoke
Hampshire RG21 4AF

Telephone: 01256 331144
Fax: 01256 331134
E: info@odysseyconsult.co.uk
W: www.odysseyconsult.co.uk

Job Title			
LAND SOUTH OF BURNDILL ROAD, YAPTON			
Drawing Title			
OVERLAND FLOW ROUTE			
Client			
BOVIS HOMES			
Scale	Date	Designed	SG
1:500 @A1	NOV 18		
Drawn	Checked	Approved	RS
SOM	LH		
Job No	Drawing No		Rev
18-070	18-070/105		D

APPENDIX C

Microdrainage Calculations

Odyssey Markides		Page 1
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

STORM SEWER DESIGN by the Modified Rational Method

Design Criteria for SW Network

Pipe Sizes STANDARD Manhole Sizes STANDARD

FEH Rainfall Model

Return Period (years)	2
FEH Rainfall Version	1999
Site Location GB 498650 101750 SU 98650 01750	
C (1km)	-0.025
D1 (1km)	0.390
D2 (1km)	0.245
D3 (1km)	0.403
E (1km)	0.310
F (1km)	2.321
Maximum Rainfall (mm/hr)	50
Maximum Time of Concentration (mins)	30
Foul Sewage (l/s/ha)	0.000
Volumetric Runoff Coeff.	0.750
PIMP (%)	100
Add Flow / Climate Change (%)	0
Minimum Backdrop Height (m)	0.200
Maximum Backdrop Height (m)	1.500
Min Design Depth for Optimisation (m)	1.200
Min Vel for Auto Design only (m/s)	1.00
Min Slope for Optimisation (1:X)	500

Designed with Level Soffits

Time Area Diagram for SW Network at outfall (pipe S1.008)

Time (mins)	Area (ha)	Time (mins)	Area (ha)	Time (mins)	Area (ha)
0-4	0.322	4-8	0.375	8-12	0.013

Total Area Contributing (ha) = 0.710

Total Pipe Volume (m³) = 42.781

Time Area Diagram at outfall (pipe S23.011)

Time (mins)	Area (ha)	Time (mins)	Area (ha)	Time (mins)	Area (ha)
0-4	0.451	4-8	0.730	8-12	0.001

Total Area Contributing (ha) = 1.182

Total Pipe Volume (m³) = 59.406

©1982-2018 Innovyze

Odyssey Markides										Page 2		
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH						
XP Solutions						Network 2018.1						
<u>Network Design Table for SW Network</u> « - Indicates pipe capacity < flow												
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section	Type	Auto Design
S1.000	23.258	0.139	167.3	0.015	4.00	0.0	0.600	o	225	Pipe/Conduit		
S1.001	35.092	0.211	166.3	0.040	0.00	0.0	0.600	o	225	Pipe/Conduit		
S1.002	57.745	0.243	237.6	0.049	0.00	0.0	0.600	o	300	Pipe/Conduit		
S1.003	12.182	0.032	380.7	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit		
S2.000	10.197	0.537	19.0	0.031	4.00	0.0	0.600	o	225	Pipe/Conduit		
S3.000	5.000	0.010	500.0	0.019	4.00	0.0	0.600	o	100	Pipe/Conduit		
S3.001	7.043	1.095	6.4	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S4.000	5.000	0.010	500.0	0.024	4.00	0.0	0.600	o	150	Pipe/Conduit		
S4.001	7.655	0.795	9.6	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit		
S5.000	5.000	0.010	500.0	0.009	4.00	0.0	0.600	o	100	Pipe/Conduit		
S5.001	7.655	1.195	6.4	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S1.004	55.100	0.143	385.3	0.061	0.00	0.0	0.600	o	450	Pipe/Conduit		
S6.000	5.000	0.010	500.0	0.009	4.00	0.0	0.600	o	100	Pipe/Conduit		
S6.001	4.667	0.278	16.8	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
<u>Network Results Table</u>												
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)		
S1.000	50.00	4.38	5.645	0.015	0.0	0.0	0.0	1.01	40.1	2.0		
S1.001	50.00	4.96	5.506	0.055	0.0	0.0	0.0	1.01	40.2	7.4		
S1.002	50.00	5.91	5.220	0.104	0.0	0.0	0.0	1.02	71.8	14.1		
S1.003	50.00	6.11	4.827	0.104	0.0	0.0	0.0	1.04	164.8	14.1		
S2.000	50.00	4.06	5.558	0.031	0.0	0.0	0.0	3.02	120.0	4.2		
S3.000	50.00	4.25	6.250	0.019	0.0	0.0	0.0	0.34	2.7	2.6		
S3.001	50.00	4.29	6.240	0.019	0.0	0.0	0.0	3.07	24.1	2.6		
S4.000	50.00	4.19	6.000	0.024	0.0	0.0	0.0	0.44	7.8	3.2		
S4.001	50.00	4.23	5.990	0.024	0.0	0.0	0.0	3.27	57.7	3.2		
S5.000	50.00	4.25	6.350	0.009	0.0	0.0	0.0	0.34	2.7	1.2		
S5.001	50.00	4.29	6.340	0.009	0.0	0.0	0.0	3.07	24.2	1.2		
S1.004	48.61	7.00	4.795	0.248	0.0	0.0	0.0	1.03	163.8	32.6		
S6.000	50.00	4.25	6.500	0.009	0.0	0.0	0.0	0.34	2.7	1.2		
S6.001	50.00	4.29	6.490	0.009	0.0	0.0	0.0	1.89	14.9	1.2		
©1982-2018 Innovyze												

Odyssey Markides											Page 3																																																																																																																																																																																																																																																																																																																																																																																	
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton																																																																																																																																																																																																																																																																																																																																																																																						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH																																																																																																																																																																																																																																																																																																																																																																																						
XP Solutions						Network 2018.1																																																																																																																																																																																																																																																																																																																																																																																						
Network Design Table for SW Network <table><tr><th>PN</th><th>Length (m)</th><th>Fall (m)</th><th>Slope (1:X)</th><th>I.Area (ha)</th><th>T.E. (mins)</th><th>Base Flow (l/s)</th><th>k (mm)</th><th>HYD SECT</th><th>DIA (mm)</th><th>Section Type</th><th>Auto Design</th></tr><tr><td>S7.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.011</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S7.001</td><td>8.420</td><td>0.428</td><td>19.7</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S8.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.014</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S8.001</td><td>3.333</td><td>0.128</td><td>26.0</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S9.000</td><td>4.995</td><td>0.010</td><td>500.0</td><td>0.011</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S9.001</td><td>10.012</td><td>0.378</td><td>26.5</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S6.002</td><td>18.846</td><td>1.209</td><td>15.6</td><td>0.028</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S10.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.028</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S10.001</td><td>9.596</td><td>1.487</td><td>6.5</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S11.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.019</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S11.001</td><td>6.862</td><td>1.487</td><td>4.6</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S12.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.017</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S12.001</td><td>4.482</td><td>1.387</td><td>3.2</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S13.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.014</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S13.001</td><td>3.330</td><td>1.237</td><td>2.7</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr></table> Network Results Table <table><tr><th>PN</th><th>Rain (mm/hr)</th><th>T.C. (mins)</th><th>US/IL (m)</th><th>Σ I.Area (ha)</th><th>Σ Base Flow (l/s)</th><th>Foul (l/s)</th><th>Add Flow (l/s)</th><th>Vel (m/s)</th><th>Cap (l/s)</th><th>Flow (l/s)</th></tr><tr><td>S7.000</td><td>50.00</td><td>4.25</td><td>6.650</td><td>0.011</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.5</td></tr><tr><td>S7.001</td><td>50.00</td><td>4.33</td><td>6.640</td><td>0.011</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.75</td><td>13.7</td><td>1.5</td></tr><tr><td>S8.000</td><td>50.00</td><td>4.25</td><td>6.350</td><td>0.014</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.9</td></tr><tr><td>S8.001</td><td>50.00</td><td>4.28</td><td>6.340</td><td>0.014</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.52</td><td>11.9</td><td>1.9</td></tr><tr><td>S9.000</td><td>50.00</td><td>4.25</td><td>6.600</td><td>0.011</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.5</td></tr><tr><td>S9.001</td><td>50.00</td><td>4.36</td><td>6.590</td><td>0.011</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.51</td><td>11.8</td><td>1.5</td></tr><tr><td>S6.002</td><td>50.00</td><td>4.48</td><td>6.162</td><td>0.073</td><td>0.0</td><td>0.0</td><td>0.0</td><td>2.56</td><td>45.3</td><td>9.9</td></tr><tr><td>S10.000</td><td>50.00</td><td>4.19</td><td>6.450</td><td>0.028</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.44</td><td>7.8</td><td>3.8</td></tr><tr><td>S10.001</td><td>50.00</td><td>4.23</td><td>6.440</td><td>0.028</td><td>0.0</td><td>0.0</td><td>0.0</td><td>3.99</td><td>70.6</td><td>3.8</td></tr><tr><td>S11.000</td><td>50.00</td><td>4.25</td><td>6.500</td><td>0.019</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>2.6</td></tr><tr><td>S11.001</td><td>50.00</td><td>4.28</td><td>6.490</td><td>0.019</td><td>0.0</td><td>0.0</td><td>0.0</td><td>3.63</td><td>28.5</td><td>2.6</td></tr><tr><td>S12.000</td><td>50.00</td><td>4.25</td><td>6.400</td><td>0.017</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>2.3</td></tr><tr><td>S12.001</td><td>50.00</td><td>4.26</td><td>6.390</td><td>0.017</td><td>0.0</td><td>0.0</td><td>0.0</td><td>4.33</td><td>34.0</td><td>2.3</td></tr><tr><td>S13.000</td><td>50.00</td><td>4.25</td><td>6.250</td><td>0.014</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.9</td></tr><tr><td>S13.001</td><td>50.00</td><td>4.26</td><td>6.240</td><td>0.014</td><td>0.0</td><td>0.0</td><td>0.0</td><td>4.75</td><td>37.3</td><td>1.9</td></tr></table>													PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design	S7.000	5.000	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit		S7.001	8.420	0.428	19.7	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S8.000	5.000	0.010	500.0	0.014	4.00	0.0	0.600	o	100	Pipe/Conduit		S8.001	3.333	0.128	26.0	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S9.000	4.995	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit		S9.001	10.012	0.378	26.5	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S6.002	18.846	1.209	15.6	0.028	0.00	0.0	0.600	o	150	Pipe/Conduit		S10.000	5.000	0.010	500.0	0.028	4.00	0.0	0.600	o	150	Pipe/Conduit		S10.001	9.596	1.487	6.5	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit		S11.000	5.000	0.010	500.0	0.019	4.00	0.0	0.600	o	100	Pipe/Conduit		S11.001	6.862	1.487	4.6	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S12.000	5.000	0.010	500.0	0.017	4.00	0.0	0.600	o	100	Pipe/Conduit		S12.001	4.482	1.387	3.2	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S13.000	5.000	0.010	500.0	0.014	4.00	0.0	0.600	o	100	Pipe/Conduit		S13.001	3.330	1.237	2.7	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)	S7.000	50.00	4.25	6.650	0.011	0.0	0.0	0.0	0.34	2.7	1.5	S7.001	50.00	4.33	6.640	0.011	0.0	0.0	0.0	1.75	13.7	1.5	S8.000	50.00	4.25	6.350	0.014	0.0	0.0	0.0	0.34	2.7	1.9	S8.001	50.00	4.28	6.340	0.014	0.0	0.0	0.0	1.52	11.9	1.9	S9.000	50.00	4.25	6.600	0.011	0.0	0.0	0.0	0.34	2.7	1.5	S9.001	50.00	4.36	6.590	0.011	0.0	0.0	0.0	1.51	11.8	1.5	S6.002	50.00	4.48	6.162	0.073	0.0	0.0	0.0	2.56	45.3	9.9	S10.000	50.00	4.19	6.450	0.028	0.0	0.0	0.0	0.44	7.8	3.8	S10.001	50.00	4.23	6.440	0.028	0.0	0.0	0.0	3.99	70.6	3.8	S11.000	50.00	4.25	6.500	0.019	0.0	0.0	0.0	0.34	2.7	2.6	S11.001	50.00	4.28	6.490	0.019	0.0	0.0	0.0	3.63	28.5	2.6	S12.000	50.00	4.25	6.400	0.017	0.0	0.0	0.0	0.34	2.7	2.3	S12.001	50.00	4.26	6.390	0.017	0.0	0.0	0.0	4.33	34.0	2.3	S13.000	50.00	4.25	6.250	0.014	0.0	0.0	0.0	0.34	2.7	1.9	S13.001	50.00	4.26	6.240	0.014	0.0	0.0	0.0	4.75	37.3	1.9
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design																																																																																																																																																																																																																																																																																																																																																																																	
S7.000	5.000	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S7.001	8.420	0.428	19.7	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S8.000	5.000	0.010	500.0	0.014	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S8.001	3.333	0.128	26.0	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S9.000	4.995	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S9.001	10.012	0.378	26.5	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S6.002	18.846	1.209	15.6	0.028	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S10.000	5.000	0.010	500.0	0.028	4.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S10.001	9.596	1.487	6.5	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S11.000	5.000	0.010	500.0	0.019	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S11.001	6.862	1.487	4.6	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S12.000	5.000	0.010	500.0	0.017	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S12.001	4.482	1.387	3.2	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S13.000	5.000	0.010	500.0	0.014	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
S13.001	3.330	1.237	2.7	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																																																		
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																																																																		
S7.000	50.00	4.25	6.650	0.011	0.0	0.0	0.0	0.34	2.7	1.5																																																																																																																																																																																																																																																																																																																																																																																		
S7.001	50.00	4.33	6.640	0.011	0.0	0.0	0.0	1.75	13.7	1.5																																																																																																																																																																																																																																																																																																																																																																																		
S8.000	50.00	4.25	6.350	0.014	0.0	0.0	0.0	0.34	2.7	1.9																																																																																																																																																																																																																																																																																																																																																																																		
S8.001	50.00	4.28	6.340	0.014	0.0	0.0	0.0	1.52	11.9	1.9																																																																																																																																																																																																																																																																																																																																																																																		
S9.000	50.00	4.25	6.600	0.011	0.0	0.0	0.0	0.34	2.7	1.5																																																																																																																																																																																																																																																																																																																																																																																		
S9.001	50.00	4.36	6.590	0.011	0.0	0.0	0.0	1.51	11.8	1.5																																																																																																																																																																																																																																																																																																																																																																																		
S6.002	50.00	4.48	6.162	0.073	0.0	0.0	0.0	2.56	45.3	9.9																																																																																																																																																																																																																																																																																																																																																																																		
S10.000	50.00	4.19	6.450	0.028	0.0	0.0	0.0	0.44	7.8	3.8																																																																																																																																																																																																																																																																																																																																																																																		
S10.001	50.00	4.23	6.440	0.028	0.0	0.0	0.0	3.99	70.6	3.8																																																																																																																																																																																																																																																																																																																																																																																		
S11.000	50.00	4.25	6.500	0.019	0.0	0.0	0.0	0.34	2.7	2.6																																																																																																																																																																																																																																																																																																																																																																																		
S11.001	50.00	4.28	6.490	0.019	0.0	0.0	0.0	3.63	28.5	2.6																																																																																																																																																																																																																																																																																																																																																																																		
S12.000	50.00	4.25	6.400	0.017	0.0	0.0	0.0	0.34	2.7	2.3																																																																																																																																																																																																																																																																																																																																																																																		
S12.001	50.00	4.26	6.390	0.017	0.0	0.0	0.0	4.33	34.0	2.3																																																																																																																																																																																																																																																																																																																																																																																		
S13.000	50.00	4.25	6.250	0.014	0.0	0.0	0.0	0.34	2.7	1.9																																																																																																																																																																																																																																																																																																																																																																																		
S13.001	50.00	4.26	6.240	0.014	0.0	0.0	0.0	4.75	37.3	1.9																																																																																																																																																																																																																																																																																																																																																																																		
©1982-2018 Innovyze																																																																																																																																																																																																																																																																																																																																																																																												

Odyssey Markides											Page 4		
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton							
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH							
XP Solutions						Network 2018.1							
<u>Network Design Table for SW Network</u>													
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section	Type	Auto Design	
S1.005	67.722	0.176	384.8	0.033	0.00	0.0	0.600	o	450	Pipe/Conduit			
S14.000	5.000	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit			
S14.001	5.470	1.238	4.4	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S15.000	5.000	0.010	500.0	0.010	4.00	0.0	0.600	o	100	Pipe/Conduit			
S15.001	12.229	1.238	9.9	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S16.000	5.000	0.010	500.0	0.020	4.00	0.0	0.600	o	150	Pipe/Conduit			
S16.001	9.808	1.388	7.1	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S14.002	17.458	0.175	99.8	0.024	0.00	0.0	0.600	o	150	Pipe/Conduit			
S17.000	5.000	0.010	500.0	0.020	4.00	0.0	0.600	o	150	Pipe/Conduit			
S17.001	4.927	1.463	3.4	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S18.000	5.000	0.010	500.0	0.019	4.00	0.0	0.600	o	100	Pipe/Conduit			
S18.001	3.331	1.013	3.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S1.006	30.144	0.078	386.5	0.025	0.00	0.0	0.600	o	450	Pipe/Conduit			
<u>Network Results Table</u>													
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)			
S1.005	44.37	8.09	4.653	0.432		0.0	0.0	0.0	1.03	163.9	51.9		
S14.000	50.00	4.25	6.250	0.011		0.0	0.0	0.0	0.34	2.7	1.5		
S14.001	50.00	4.27	6.240	0.011		0.0	0.0	0.0	3.71	29.1	1.5		
S15.000	50.00	4.25	6.250	0.010		0.0	0.0	0.0	0.34	2.7	1.4		
S15.001	50.00	4.33	6.240	0.010		0.0	0.0	0.0	2.47	19.4	1.4		
S16.000	50.00	4.19	6.350	0.020		0.0	0.0	0.0	0.44	7.8	2.7		
S16.001	50.00	4.23	6.340	0.020		0.0	0.0	0.0	3.82	67.4	2.7		
S14.002	50.00	4.62	4.952	0.065		0.0	0.0	0.0	1.01	17.8	8.9		
S17.000	50.00	4.19	6.250	0.020		0.0	0.0	0.0	0.44	7.8	2.7		
S17.001	50.00	4.20	6.240	0.020		0.0	0.0	0.0	5.53	97.8	2.7		
S18.000	50.00	4.25	5.850	0.019		0.0	0.0	0.0	0.34	2.7	2.6		
S18.001	50.00	4.26	5.840	0.019		0.0	0.0	0.0	4.30	33.7	2.6		
S1.006	42.77	8.58	4.477	0.562		0.0	0.0	0.0	1.03	163.5	65.0		
©1982-2018 Innovyze													

Odyssey Markides											Page 5		
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton							
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH							
XP Solutions						Network 2018.1							
<u>Network Design Table for SW Network</u>													
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design		
S19.000	4.661	0.051	91.4	0.020	4.00	0.0	0.600	o	450	Pipe/Conduit			
S20.000	5.000	0.010	500.0	0.023	4.00	0.0	0.600	o	150	Pipe/Conduit			
S20.001	7.013	1.041	6.7	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S21.000	5.000	0.010	500.0	0.013	4.00	0.0	0.600	o	100	Pipe/Conduit			
S21.001	8.789	1.241	7.1	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S1.007	21.970	0.059	372.4	0.032	0.00	0.0	0.600	o	450	Pipe/Conduit			
S22.000	4.998	0.010	499.8	0.027	4.00	0.0	0.600	o	150	Pipe/Conduit			
S22.001	4.924	1.568	3.1	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S22.002	13.744	0.082	167.6	0.034	0.00	0.0	0.600	o	225	Pipe/Conduit			
S1.008	11.291	0.030	376.4	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit			
S23.000	5.002	0.010	500.2	0.018	4.00	0.0	0.600	o	100	Pipe/Conduit			
S23.001	6.193	0.247	25.1	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S24.000	5.000	0.010	500.0	0.010	4.00	0.0	0.600	o	100	Pipe/Conduit			
S24.001	5.420	0.247	21.9	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
<u>Network Results Table</u>													
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)			
S19.000	50.00	4.04	4.450	0.020	0.0	0.0	0.0	2.13	338.4	2.7			
S20.000	50.00	4.19	5.800	0.023	0.0	0.0	0.0	0.44	7.8	3.1			
S20.001	50.00	4.22	5.790	0.023	0.0	0.0	0.0	3.91	69.1	3.1			
S21.000	50.00	4.25	6.000	0.013	0.0	0.0	0.0	0.34	2.7	1.8			
S21.001	50.00	4.30	5.990	0.013	0.0	0.0	0.0	2.92	23.0	1.8			
S1.007	41.71	8.93	4.399	0.650	0.0	0.0	0.0	1.05	166.6	73.4			
S22.000	50.00	4.19	6.300	0.027	0.0	0.0	0.0	0.44	7.8	3.7			
S22.001	50.00	4.20	6.290	0.027	0.0	0.0	0.0	5.73	101.2	3.7			
S22.002	50.00	4.43	4.647	0.061	0.0	0.0	0.0	1.01	40.0	8.2			
S1.008	41.19	9.11	4.340	0.710	0.0	0.0	0.0	1.04	165.7	79.3			
S23.000	50.00	4.25	6.450	0.018	0.0	0.0	0.0	0.34	2.7	2.4			
S23.001	50.00	4.31	6.440	0.018	0.0	0.0	0.0	1.55	12.2	2.4			
S24.000	50.00	4.25	6.450	0.010	0.0	0.0	0.0	0.34	2.7	1.4			
S24.001	50.00	4.30	6.440	0.010	0.0	0.0	0.0	1.66	13.0	1.4			
©1982-2018 Innovyze													

Odyssey Markides											Page 6	
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH						
XP Solutions						Network 2018.1						
<u>Network Design Table for SW Network</u>												
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design	
S23.002	28.743	0.172	167.1	0.000	0.00	0.0	0.600	o	225	Pipe/Conduit		
S25.000	5.000	0.010	500.0	0.017	4.00	0.0	0.600	o	100	Pipe/Conduit		
S25.001	7.936	0.319	24.9	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S26.000	5.000	0.010	500.0	0.015	4.00	0.0	0.600	o	100	Pipe/Conduit		
S26.001	6.040	0.219	27.6	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S27.000	4.992	0.010	499.2	0.013	4.00	0.0	0.600	o	100	Pipe/Conduit		
S27.001	5.271	0.219	24.1	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S23.003	52.563	0.315	166.9	0.041	0.00	0.0	0.600	o	225	Pipe/Conduit		
S28.000	5.000	0.010	500.0	0.014	4.00	0.0	0.600	o	100	Pipe/Conduit		
S28.001	8.947	0.284	31.5	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S23.004	8.967	0.038	236.0	0.000	0.00	0.0	0.600	o	300	Pipe/Conduit		
S23.005	10.913	0.046	237.2	0.000	0.00	0.0	0.600	o	300	Pipe/Conduit		
S29.000	5.000	0.010	500.0	0.007	4.00	0.0	0.600	o	100	Pipe/Conduit		
S29.001	5.665	0.218	26.0	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
<u>Network Results Table</u>												
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)		
S23.002	50.00	4.79	6.068	0.028	0.0	0.0	0.0	1.01	40.1	3.8		
S25.000	50.00	4.25	6.350	0.017	0.0	0.0	0.0	0.34	2.7	2.3		
S25.001	50.00	4.33	6.340	0.017	0.0	0.0	0.0	1.55	12.2	2.3		
S26.000	50.00	4.25	6.250	0.015	0.0	0.0	0.0	0.34	2.7	2.0		
S26.001	50.00	4.32	6.240	0.015	0.0	0.0	0.0	1.48	11.6	2.0		
S27.000	50.00	4.25	6.250	0.013	0.0	0.0	0.0	0.34	2.7	1.8		
S27.001	50.00	4.30	6.240	0.013	0.0	0.0	0.0	1.58	12.4	1.8		
S23.003	50.00	5.66	5.896	0.114	0.0	0.0	0.0	1.01	40.1	15.5		
S28.000	50.00	4.25	6.000	0.014	0.0	0.0	0.0	0.34	2.7	1.9		
S28.001	50.00	4.35	5.990	0.014	0.0	0.0	0.0	1.38	10.8	1.9		
S23.004	50.00	5.80	5.506	0.128	0.0	0.0	0.0	1.02	72.0	17.4		
S23.005	50.00	5.98	5.468	0.128	0.0	0.0	0.0	1.02	71.8	17.4		
S29.000	50.00	4.25	5.850	0.007	0.0	0.0	0.0	0.34	2.7	0.9		
S29.001	50.00	4.31	5.840	0.007	0.0	0.0	0.0	1.52	11.9	0.9		
©1982-2018 Innovyze												

Odyssey Markides											Page 7		
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton							
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH							
XP Solutions						Network 2018.1							
<u>Network Design Table for SW Network</u>													
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design		
S23.006	10.494	0.044	238.5	0.029	0.00	0.0	0.600	o	300	Pipe/Conduit			
S30.000	5.000	0.010	500.0	0.019	4.00	0.0	0.600	o	100	Pipe/Conduit			
S30.001	5.482	0.162	33.8	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S31.000	5.000	0.010	500.0	0.008	4.00	0.0	0.600	o	100	Pipe/Conduit			
S31.001	10.296	0.462	22.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S32.000	5.000	0.010	500.0	0.010	4.00	0.0	0.600	o	100	Pipe/Conduit			
S32.001	7.810	0.512	15.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S33.000	5.000	0.010	500.0	0.019	4.00	0.0	0.600	o	100	Pipe/Conduit			
S33.001	5.831	0.412	14.2	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S34.000	5.000	0.010	500.0	0.013	4.00	0.0	0.600	o	100	Pipe/Conduit			
S34.001	5.000	0.262	19.1	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S23.007	69.027	0.179	385.6	0.026	0.00	0.0	0.600	o	450	Pipe/Conduit			
S35.000	10.506	0.031	338.9	0.000	4.00	0.0	0.600	o	450	Pipe/Conduit			
S23.008	9.072	0.024	378.0	0.027	0.00	0.0	0.600	o	450	Pipe/Conduit			
<u>Network Results Table</u>													
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)			
S23.006	50.00	6.15	5.422	0.164	0.0	0.0	0.0	1.01	71.7	22.3			
S30.000	50.00	4.25	5.750	0.019	0.0	0.0	0.0	0.34	2.7	2.6			
S30.001	50.00	4.32	5.740	0.019	0.0	0.0	0.0	1.33	10.5	2.6			
S31.000	50.00	4.25	6.050	0.008	0.0	0.0	0.0	0.34	2.7	1.1			
S31.001	50.00	4.35	6.040	0.008	0.0	0.0	0.0	1.64	12.9	1.1			
S32.000	50.00	4.25	6.100	0.010	0.0	0.0	0.0	0.34	2.7	1.4			
S32.001	50.00	4.31	6.090	0.010	0.0	0.0	0.0	1.99	15.6	1.4			
S33.000	50.00	4.25	6.000	0.019	0.0	0.0	0.0	0.34	2.7	2.6			
S33.001	50.00	4.29	5.990	0.019	0.0	0.0	0.0	2.06	16.2	2.6			
S34.000	50.00	4.25	5.850	0.013	0.0	0.0	0.0	0.34	2.7	1.8			
S34.001	50.00	4.29	5.840	0.013	0.0	0.0	0.0	1.78	13.9	1.8			
S23.007	47.45	7.27	5.228	0.259	0.0	0.0	0.0	1.03	163.7	33.3			
S35.000	50.00	4.16	5.080	0.000	0.0	0.0	0.0	1.10	174.7	0.0			
S23.008	46.86	7.42	5.049	0.287	0.0	0.0	0.0	1.04	165.3	36.4			
©1982-2018 Innovyze													

Odyssey Markides											Page 8																																																																																																																																																																																																																																																																																																																																																										
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton																																																																																																																																																																																																																																																																																																																																																															
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH																																																																																																																																																																																																																																																																																																																																																															
XP Solutions						Network 2018.1																																																																																																																																																																																																																																																																																																																																																															
<u>Network Design Table for SW Network</u> <table><tr><th>PN</th><th>Length (m)</th><th>Fall (m)</th><th>Slope (1:X)</th><th>I.Area (ha)</th><th>T.E. (mins)</th><th>Base Flow (l/s)</th><th>k (mm)</th><th>HYD SECT</th><th>DIA (mm)</th><th>Section Type</th><th>Auto Design</th></tr><tr><td>S23.009</td><td>9.664</td><td>0.025</td><td>386.6</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>450</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S36.000</td><td>4.998</td><td>0.010</td><td>499.8</td><td>0.016</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S36.001</td><td>6.863</td><td>0.450</td><td>15.3</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S37.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.010</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S37.001</td><td>4.482</td><td>0.250</td><td>17.9</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S38.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.016</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S38.001</td><td>3.330</td><td>0.250</td><td>13.3</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S36.002</td><td>48.237</td><td>0.619</td><td>77.9</td><td>0.061</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S39.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.013</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S39.001</td><td>3.330</td><td>0.169</td><td>19.7</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S40.000</td><td>4.999</td><td>0.010</td><td>499.9</td><td>0.026</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S40.001</td><td>7.886</td><td>0.569</td><td>13.9</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S41.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.020</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S41.001</td><td>5.507</td><td>0.400</td><td>13.8</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr></table> <u>Network Results Table</u> <table><tr><th>PN</th><th>Rain (mm/hr)</th><th>T.C. (mins)</th><th>US/IL (m)</th><th>Σ I.Area (ha)</th><th>Σ Base Flow (l/s)</th><th>Foul (l/s)</th><th>Add Flow (l/s)</th><th>Vel (m/s)</th><th>Cap (l/s)</th><th>Flow (l/s)</th></tr><tr><td>S23.009</td><td>46.25</td><td>7.57</td><td>5.025</td><td>0.287</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.03</td><td>163.5</td><td>36.4</td></tr><tr><td>S36.000</td><td>50.00</td><td>4.25</td><td>6.700</td><td>0.016</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>2.2</td></tr><tr><td>S36.001</td><td>50.00</td><td>4.30</td><td>6.690</td><td>0.016</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.99</td><td>15.6</td><td>2.2</td></tr><tr><td>S37.000</td><td>50.00</td><td>4.25</td><td>6.500</td><td>0.010</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.4</td></tr><tr><td>S37.001</td><td>50.00</td><td>4.29</td><td>6.490</td><td>0.010</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.83</td><td>14.4</td><td>1.4</td></tr><tr><td>S38.000</td><td>50.00</td><td>4.25</td><td>6.500</td><td>0.016</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>2.2</td></tr><tr><td>S38.001</td><td>50.00</td><td>4.27</td><td>6.490</td><td>0.016</td><td>0.0</td><td>0.0</td><td>0.0</td><td>2.13</td><td>16.7</td><td>2.2</td></tr><tr><td>S36.002</td><td>50.00</td><td>5.01</td><td>6.190</td><td>0.103</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.14</td><td>20.1</td><td>13.9</td></tr><tr><td>S39.000</td><td>50.00</td><td>4.25</td><td>5.800</td><td>0.013</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.8</td></tr><tr><td>S39.001</td><td>50.00</td><td>4.28</td><td>5.790</td><td>0.013</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.75</td><td>13.7</td><td>1.8</td></tr><tr><td>S40.000</td><td>50.00</td><td>4.19</td><td>6.150</td><td>0.026</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.44</td><td>7.8</td><td>3.5</td></tr><tr><td>S40.001</td><td>50.00</td><td>4.24</td><td>6.140</td><td>0.026</td><td>0.0</td><td>0.0</td><td>0.0</td><td>2.72</td><td>48.1</td><td>3.5</td></tr><tr><td>S41.000</td><td>50.00</td><td>4.19</td><td>6.350</td><td>0.020</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.44</td><td>7.8</td><td>2.7</td></tr><tr><td>S41.001</td><td>50.00</td><td>4.22</td><td>6.340</td><td>0.020</td><td>0.0</td><td>0.0</td><td>0.0</td><td>2.73</td><td>48.2</td><td>2.7</td></tr></table>													PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design	S23.009	9.664	0.025	386.6	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit		S36.000	4.998	0.010	499.8	0.016	4.00	0.0	0.600	o	100	Pipe/Conduit		S36.001	6.863	0.450	15.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S37.000	5.000	0.010	500.0	0.010	4.00	0.0	0.600	o	100	Pipe/Conduit		S37.001	4.482	0.250	17.9	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S38.000	5.000	0.010	500.0	0.016	4.00	0.0	0.600	o	100	Pipe/Conduit		S38.001	3.330	0.250	13.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S36.002	48.237	0.619	77.9	0.061	0.00	0.0	0.600	o	150	Pipe/Conduit		S39.000	5.000	0.010	500.0	0.013	4.00	0.0	0.600	o	100	Pipe/Conduit		S39.001	3.330	0.169	19.7	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S40.000	4.999	0.010	499.9	0.026	4.00	0.0	0.600	o	150	Pipe/Conduit		S40.001	7.886	0.569	13.9	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit		S41.000	5.000	0.010	500.0	0.020	4.00	0.0	0.600	o	150	Pipe/Conduit		S41.001	5.507	0.400	13.8	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit		PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)	S23.009	46.25	7.57	5.025	0.287	0.0	0.0	0.0	1.03	163.5	36.4	S36.000	50.00	4.25	6.700	0.016	0.0	0.0	0.0	0.34	2.7	2.2	S36.001	50.00	4.30	6.690	0.016	0.0	0.0	0.0	1.99	15.6	2.2	S37.000	50.00	4.25	6.500	0.010	0.0	0.0	0.0	0.34	2.7	1.4	S37.001	50.00	4.29	6.490	0.010	0.0	0.0	0.0	1.83	14.4	1.4	S38.000	50.00	4.25	6.500	0.016	0.0	0.0	0.0	0.34	2.7	2.2	S38.001	50.00	4.27	6.490	0.016	0.0	0.0	0.0	2.13	16.7	2.2	S36.002	50.00	5.01	6.190	0.103	0.0	0.0	0.0	1.14	20.1	13.9	S39.000	50.00	4.25	5.800	0.013	0.0	0.0	0.0	0.34	2.7	1.8	S39.001	50.00	4.28	5.790	0.013	0.0	0.0	0.0	1.75	13.7	1.8	S40.000	50.00	4.19	6.150	0.026	0.0	0.0	0.0	0.44	7.8	3.5	S40.001	50.00	4.24	6.140	0.026	0.0	0.0	0.0	2.72	48.1	3.5	S41.000	50.00	4.19	6.350	0.020	0.0	0.0	0.0	0.44	7.8	2.7	S41.001	50.00	4.22	6.340	0.020	0.0	0.0	0.0	2.73	48.2	2.7
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design																																																																																																																																																																																																																																																																																																																																																										
S23.009	9.664	0.025	386.6	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S36.000	4.998	0.010	499.8	0.016	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S36.001	6.863	0.450	15.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S37.000	5.000	0.010	500.0	0.010	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S37.001	4.482	0.250	17.9	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S38.000	5.000	0.010	500.0	0.016	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S38.001	3.330	0.250	13.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S36.002	48.237	0.619	77.9	0.061	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S39.000	5.000	0.010	500.0	0.013	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S39.001	3.330	0.169	19.7	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S40.000	4.999	0.010	499.9	0.026	4.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S40.001	7.886	0.569	13.9	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S41.000	5.000	0.010	500.0	0.020	4.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
S41.001	5.507	0.400	13.8	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																																																																																											
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																																											
S23.009	46.25	7.57	5.025	0.287	0.0	0.0	0.0	1.03	163.5	36.4																																																																																																																																																																																																																																																																																																																																																											
S36.000	50.00	4.25	6.700	0.016	0.0	0.0	0.0	0.34	2.7	2.2																																																																																																																																																																																																																																																																																																																																																											
S36.001	50.00	4.30	6.690	0.016	0.0	0.0	0.0	1.99	15.6	2.2																																																																																																																																																																																																																																																																																																																																																											
S37.000	50.00	4.25	6.500	0.010	0.0	0.0	0.0	0.34	2.7	1.4																																																																																																																																																																																																																																																																																																																																																											
S37.001	50.00	4.29	6.490	0.010	0.0	0.0	0.0	1.83	14.4	1.4																																																																																																																																																																																																																																																																																																																																																											
S38.000	50.00	4.25	6.500	0.016	0.0	0.0	0.0	0.34	2.7	2.2																																																																																																																																																																																																																																																																																																																																																											
S38.001	50.00	4.27	6.490	0.016	0.0	0.0	0.0	2.13	16.7	2.2																																																																																																																																																																																																																																																																																																																																																											
S36.002	50.00	5.01	6.190	0.103	0.0	0.0	0.0	1.14	20.1	13.9																																																																																																																																																																																																																																																																																																																																																											
S39.000	50.00	4.25	5.800	0.013	0.0	0.0	0.0	0.34	2.7	1.8																																																																																																																																																																																																																																																																																																																																																											
S39.001	50.00	4.28	5.790	0.013	0.0	0.0	0.0	1.75	13.7	1.8																																																																																																																																																																																																																																																																																																																																																											
S40.000	50.00	4.19	6.150	0.026	0.0	0.0	0.0	0.44	7.8	3.5																																																																																																																																																																																																																																																																																																																																																											
S40.001	50.00	4.24	6.140	0.026	0.0	0.0	0.0	2.72	48.1	3.5																																																																																																																																																																																																																																																																																																																																																											
S41.000	50.00	4.19	6.350	0.020	0.0	0.0	0.0	0.44	7.8	2.7																																																																																																																																																																																																																																																																																																																																																											
S41.001	50.00	4.22	6.340	0.020	0.0	0.0	0.0	2.73	48.2	2.7																																																																																																																																																																																																																																																																																																																																																											
©1982-2018 Innovyze																																																																																																																																																																																																																																																																																																																																																																					

Odyssey Markides											Page 9		
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton							
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH							
XP Solutions						Network 2018.1							
<u>Network Design Table for SW Network</u>													
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design		
S42.000	5.000	0.010	500.0	0.013	4.00	0.0	0.600	o	100	Pipe/Conduit			
S42.001	2.528	0.200	12.6	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S43.000	4.983	0.010	500.0	0.124	4.00	0.0	0.600	o	100	Pipe/Conduit			
S43.001	10.637	0.200	53.2	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S41.002	30.809	0.184	167.4	0.053	0.00	0.0	0.600	o	225	Pipe/Conduit			
S44.000	5.000	0.010	500.0	0.026	4.00	0.0	0.600	o	150	Pipe/Conduit			
S44.001	10.271	0.246	41.8	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S41.003	7.439	0.045	165.3	0.014	0.00	0.0	0.600	o	225	Pipe/Conduit			
S45.000	5.000	0.010	500.0	0.048	4.00	0.0	0.600	o	100	Pipe/Conduit			
S45.001	6.507	0.529	12.3	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S41.004	7.565	0.045	168.1	0.000	0.00	0.0	0.600	o	225	Pipe/Conduit			
S46.000	5.023	0.010	502.3	0.022	4.00	0.0	0.600	o	150	Pipe/Conduit			
S46.001	3.305	0.574	5.8	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S47.000	5.000	0.010	500.0	0.020	4.00	0.0	0.600	o	150	Pipe/Conduit			
<u>Network Results Table</u>													
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)			
S42.000	50.00	4.25	6.200	0.013	0.0	0.0	0.0	0.34	2.7	1.8			
S42.001	50.00	4.27	6.190	0.013	0.0	0.0	0.0	2.19	17.2	1.8			
S43.000	50.00	4.25	6.200	0.124	0.0	0.0	0.0	0.34	2.7«	16.8			
S43.001	50.00	4.41	6.190	0.124	0.0	0.0	0.0	1.06	8.3«	16.8			
S41.002	50.00	4.92	5.865	0.210	0.0	0.0	0.0	1.01	40.1	28.4			
S44.000	50.00	4.19	5.950	0.026	0.0	0.0	0.0	0.44	7.8	3.5			
S44.001	50.00	4.30	5.940	0.026	0.0	0.0	0.0	1.56	27.6	3.5			
S41.003	50.00	5.05	5.681	0.250	0.0	0.0	0.0	1.01	40.3	33.9			
S45.000	50.00	4.25	6.300	0.048	0.0	0.0	0.0	0.34	2.7«	6.5			
S45.001	50.00	4.30	6.290	0.048	0.0	0.0	0.0	2.22	17.4	6.5			
S41.004	50.00	5.17	5.636	0.298	0.0	0.0	0.0	1.01	40.0«	40.4			
S46.000	50.00	4.19	6.250	0.022	0.0	0.0	0.0	0.44	7.8	3.0			
S46.001	50.00	4.20	6.240	0.022	0.0	0.0	0.0	4.23	74.7	3.0			
S47.000	50.00	4.19	6.200	0.020	0.0	0.0	0.0	0.44	7.8	2.7			
©1982-2018 Innovyze													

Odyssey Markides											Page 10		
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton							
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH							
XP Solutions						Network 2018.1							
<u>Network Design Table for SW Network</u>													
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design		
S47.001	4.481	0.524	8.6	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S41.005	58.355	0.245	238.2	0.035	0.00	0.0	0.600	o	300	Pipe/Conduit			
S36.003	27.089	0.070	387.0	0.039	0.00	0.0	0.600	o	450	Pipe/Conduit			
S48.000	5.000	0.010	500.0	0.028	4.00	0.0	0.600	o	150	Pipe/Conduit			
S48.001	5.520	0.264	20.9	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit			
S49.000	5.000	0.010	500.0	0.007	4.00	0.0	0.600	o	100	Pipe/Conduit			
S49.001	6.282	0.264	23.8	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S50.000	5.000	0.010	500.0	0.016	4.00	0.0	0.600	o	100	Pipe/Conduit			
S50.001	8.153	0.314	26.0	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S48.002	45.251	0.190	238.2	0.020	0.00	0.0	0.600	o	300	Pipe/Conduit			
S51.000	4.999	0.010	499.9	0.016	4.00	0.0	0.600	o	100	Pipe/Conduit			
S51.001	6.870	0.154	44.6	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
S52.000	5.000	0.010	500.0	0.017	4.00	0.0	0.600	o	100	Pipe/Conduit			
S52.001	6.179	0.154	40.1	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit			
<u>Network Results Table</u>													
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)			
S47.001	50.00	4.21	6.190	0.020	0.0	0.0	0.0	3.47	61.3	2.7			
S41.005	50.00	6.13	5.516	0.375	0.0	0.0	0.0	1.01	71.7	50.8			
S36.003	50.00	6.57	5.121	0.556	0.0	0.0	0.0	1.03	163.4	75.3			
S48.000	50.00	4.19	6.150	0.028	0.0	0.0	0.0	0.44	7.8	3.8			
S48.001	50.00	4.23	6.140	0.028	0.0	0.0	0.0	2.21	39.1	3.8			
S49.000	50.00	4.25	6.200	0.007	0.0	0.0	0.0	0.34	2.7	0.9			
S49.001	50.00	4.31	6.190	0.007	0.0	0.0	0.0	1.59	12.5	0.9			
S50.000	50.00	4.25	6.250	0.016	0.0	0.0	0.0	0.34	2.7	2.2			
S50.001	50.00	4.34	6.240	0.016	0.0	0.0	0.0	1.52	11.9	2.2			
S48.002	50.00	5.08	5.726	0.071	0.0	0.0	0.0	1.01	71.7	9.6			
S51.000	50.00	4.25	5.900	0.016	0.0	0.0	0.0	0.34	2.7	2.2			
S51.001	50.00	4.35	5.890	0.016	0.0	0.0	0.0	1.16	9.1	2.2			
S52.000	50.00	4.25	5.900	0.017	0.0	0.0	0.0	0.34	2.7	2.3			
S52.001	50.00	4.33	5.890	0.017	0.0	0.0	0.0	1.22	9.6	2.3			
©1982-2018 Innovyze													

Odyssey Markides											Page 11	
Tuscany House White Hart Lane Basingstoke RG21 4AF						Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX						Designed by SG Checked by LH						
XP Solutions						Network 2018.1						
<u>Network Design Table for SW Network</u>												
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design	
S53.000	5.000	0.010	500.0	0.015	4.00	0.0	0.600	o	100	Pipe/Conduit		
S53.001	8.613	0.204	42.2	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S48.003	27.325	0.115	237.6	0.051	0.00	0.0	0.600	o	300	Pipe/Conduit		
S48.004	12.022	0.051	235.7	0.000	0.00	0.0	0.600	o	300	Pipe/Conduit		
S48.005	12.930	0.054	239.4	0.013	0.00	0.0	0.600	o	300	Pipe/Conduit		
S54.000	5.004	0.010	500.4	0.009	4.00	0.0	0.600	o	100	Pipe/Conduit		
S54.001	5.506	0.674	8.2	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S48.006	11.368	0.048	236.8	0.000	0.00	0.0	0.600	o	300	Pipe/Conduit		
S55.000	5.000	0.010	500.0	0.008	4.00	0.0	0.600	o	100	Pipe/Conduit		
S55.001	5.464	0.522	10.5	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S56.000	5.000	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit		
S56.001	3.343	0.322	10.4	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		
S48.007	17.921	0.047	385.0	0.021	0.00	0.0	0.600	o	450	Pipe/Conduit		
S48.008	7.799	0.020	385.0	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit		
<u>Network Results Table</u>												
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)		
S53.000	50.00	4.25	5.950	0.015	0.0	0.0	0.0	0.34	2.7	2.0		
S53.001	50.00	4.37	5.940	0.015	0.0	0.0	0.0	1.19	9.3	2.0		
S48.003	50.00	5.53	5.536	0.170	0.0	0.0	0.0	1.02	71.8	23.0		
S48.004	50.00	5.72	5.421	0.170	0.0	0.0	0.0	1.02	72.1	23.0		
S48.005	50.00	5.94	5.370	0.183	0.0	0.0	0.0	1.01	71.5	24.8		
S54.000	50.00	4.25	6.200	0.009	0.0	0.0	0.0	0.34	2.6	1.2		
S54.001	50.00	4.28	6.190	0.009	0.0	0.0	0.0	2.72	21.4	1.2		
S48.006	50.00	6.12	5.316	0.192	0.0	0.0	0.0	1.02	71.9	26.0		
S55.000	50.00	4.25	6.000	0.008	0.0	0.0	0.0	0.34	2.7	1.1		
S55.001	50.00	4.28	5.990	0.008	0.0	0.0	0.0	2.40	18.9	1.1		
S56.000	50.00	4.25	5.800	0.011	0.0	0.0	0.0	0.34	2.7	1.5		
S56.001	50.00	4.27	5.790	0.011	0.0	0.0	0.0	2.41	18.9	1.5		
S48.007	50.00	6.41	5.118	0.231	0.0	0.0	0.0	1.03	163.8	31.3		
S48.008	50.00	6.54	5.071	0.231	0.0	0.0	0.0	1.03	163.8	31.3		
©1982-2018 Innovyze												

Odyssey Markides										Page 12																																																																																																																																																																																																																																																																																					
Tuscany House White Hart Lane Basingstoke RG21 4AF					Burndell Road, Yapton																																																																																																																																																																																																																																																																																										
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX					Designed by SG Checked by LH																																																																																																																																																																																																																																																																																										
XP Solutions					Network 2018.1																																																																																																																																																																																																																																																																																										
<u>Network Design Table for SW Network</u> <table><tr><th>PN</th><th>Length (m)</th><th>Fall (m)</th><th>Slope (1:X)</th><th>I.Area (ha)</th><th>T.E. (mins)</th><th>Base Flow (l/s)</th><th>k (mm)</th><th>HYD SECT</th><th>DIA (mm)</th><th>Section Type</th><th>Auto Design</th></tr><tr><td>S36.004</td><td>10.873</td><td>0.028</td><td>385.0</td><td>0.007</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>450</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S57.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.011</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S57.001</td><td>4.383</td><td>0.417</td><td>10.5</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S36.005</td><td>8.998</td><td>0.023</td><td>385.0</td><td>0.032</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>450</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S58.000</td><td>10.839</td><td>0.050</td><td>216.8</td><td>0.000</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>450</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S23.010</td><td>31.185</td><td>0.081</td><td>385.0</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>450</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S59.000</td><td>6.364</td><td>0.400</td><td>15.9</td><td>0.008</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>100</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S59.001</td><td>26.456</td><td>0.481</td><td>55.0</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S60.000</td><td>5.000</td><td>0.010</td><td>500.0</td><td>0.050</td><td>4.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S60.001</td><td>15.304</td><td>0.771</td><td>19.8</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>150</td><td>Pipe/Conduit</td><td></td></tr><tr><td>S23.011</td><td>7.194</td><td>0.019</td><td>378.6</td><td>0.000</td><td>0.00</td><td>0.0</td><td>0.600</td><td>o</td><td>450</td><td>Pipe/Conduit</td><td></td></tr></table> <u>Network Results Table</u> <table><tr><th>PN</th><th>Rain (mm/hr)</th><th>T.C. (mins)</th><th>US/IL (m)</th><th>Σ I.Area (ha)</th><th>Σ Base Flow (l/s)</th><th>Foul (l/s)</th><th>Add Flow (l/s)</th><th>Vel (m/s)</th><th>Cap (l/s)</th><th>Flow (l/s)</th></tr><tr><td>S36.004</td><td>49.75</td><td>6.74</td><td>5.051</td><td>0.794</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.03</td><td>163.8</td><td>107.0</td></tr><tr><td>S57.000</td><td>50.00</td><td>4.25</td><td>5.800</td><td>0.011</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.34</td><td>2.7</td><td>1.5</td></tr><tr><td>S57.001</td><td>50.00</td><td>4.28</td><td>5.790</td><td>0.011</td><td>0.0</td><td>0.0</td><td>0.0</td><td>2.40</td><td>18.8</td><td>1.5</td></tr><tr><td>S36.005</td><td>49.08</td><td>6.89</td><td>5.023</td><td>0.838</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.03</td><td>163.8</td><td>111.4</td></tr><tr><td>S58.000</td><td>50.00</td><td>4.13</td><td>5.050</td><td>0.000</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.38</td><td>219.0</td><td>0.0</td></tr><tr><td>S23.010</td><td>44.42</td><td>8.08</td><td>5.000</td><td>1.124</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.03</td><td>163.8</td><td>135.3</td></tr><tr><td>S59.000</td><td>50.00</td><td>4.05</td><td>6.200</td><td>0.008</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.95</td><td>15.3</td><td>1.1</td></tr><tr><td>S59.001</td><td>50.00</td><td>4.38</td><td>5.700</td><td>0.008</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.36</td><td>24.0</td><td>1.1</td></tr><tr><td>S60.000</td><td>50.00</td><td>4.19</td><td>6.000</td><td>0.050</td><td>0.0</td><td>0.0</td><td>0.0</td><td>0.44</td><td>7.8</td><td>6.8</td></tr><tr><td>S60.001</td><td>50.00</td><td>4.30</td><td>5.990</td><td>0.050</td><td>0.0</td><td>0.0</td><td>0.0</td><td>2.27</td><td>40.1</td><td>6.8</td></tr><tr><td>S23.011</td><td>44.03</td><td>8.19</td><td>4.919</td><td>1.182</td><td>0.0</td><td>0.0</td><td>0.0</td><td>1.04</td><td>165.2</td><td>141.0</td></tr></table>												PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design	S36.004	10.873	0.028	385.0	0.007	0.00	0.0	0.600	o	450	Pipe/Conduit		S57.000	5.000	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit		S57.001	4.383	0.417	10.5	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit		S36.005	8.998	0.023	385.0	0.032	0.00	0.0	0.600	o	450	Pipe/Conduit		S58.000	10.839	0.050	216.8	0.000	4.00	0.0	0.600	o	450	Pipe/Conduit		S23.010	31.185	0.081	385.0	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit		S59.000	6.364	0.400	15.9	0.008	4.00	0.0	0.600	o	100	Pipe/Conduit		S59.001	26.456	0.481	55.0	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit		S60.000	5.000	0.010	500.0	0.050	4.00	0.0	0.600	o	150	Pipe/Conduit		S60.001	15.304	0.771	19.8	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit		S23.011	7.194	0.019	378.6	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit		PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)	S36.004	49.75	6.74	5.051	0.794	0.0	0.0	0.0	1.03	163.8	107.0	S57.000	50.00	4.25	5.800	0.011	0.0	0.0	0.0	0.34	2.7	1.5	S57.001	50.00	4.28	5.790	0.011	0.0	0.0	0.0	2.40	18.8	1.5	S36.005	49.08	6.89	5.023	0.838	0.0	0.0	0.0	1.03	163.8	111.4	S58.000	50.00	4.13	5.050	0.000	0.0	0.0	0.0	1.38	219.0	0.0	S23.010	44.42	8.08	5.000	1.124	0.0	0.0	0.0	1.03	163.8	135.3	S59.000	50.00	4.05	6.200	0.008	0.0	0.0	0.0	1.95	15.3	1.1	S59.001	50.00	4.38	5.700	0.008	0.0	0.0	0.0	1.36	24.0	1.1	S60.000	50.00	4.19	6.000	0.050	0.0	0.0	0.0	0.44	7.8	6.8	S60.001	50.00	4.30	5.990	0.050	0.0	0.0	0.0	2.27	40.1	6.8	S23.011	44.03	8.19	4.919	1.182	0.0	0.0	0.0	1.04	165.2	141.0
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design																																																																																																																																																																																																																																																																																				
S36.004	10.873	0.028	385.0	0.007	0.00	0.0	0.600	o	450	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S57.000	5.000	0.010	500.0	0.011	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S57.001	4.383	0.417	10.5	0.000	0.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S36.005	8.998	0.023	385.0	0.032	0.00	0.0	0.600	o	450	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S58.000	10.839	0.050	216.8	0.000	4.00	0.0	0.600	o	450	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S23.010	31.185	0.081	385.0	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S59.000	6.364	0.400	15.9	0.008	4.00	0.0	0.600	o	100	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S59.001	26.456	0.481	55.0	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S60.000	5.000	0.010	500.0	0.050	4.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S60.001	15.304	0.771	19.8	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit																																																																																																																																																																																																																																																																																					
S23.011	7.194	0.019	378.6	0.000	0.00	0.0	0.600	o	450	Pipe/Conduit																																																																																																																																																																																																																																																																																					
PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)																																																																																																																																																																																																																																																																																					
S36.004	49.75	6.74	5.051	0.794	0.0	0.0	0.0	1.03	163.8	107.0																																																																																																																																																																																																																																																																																					
S57.000	50.00	4.25	5.800	0.011	0.0	0.0	0.0	0.34	2.7	1.5																																																																																																																																																																																																																																																																																					
S57.001	50.00	4.28	5.790	0.011	0.0	0.0	0.0	2.40	18.8	1.5																																																																																																																																																																																																																																																																																					
S36.005	49.08	6.89	5.023	0.838	0.0	0.0	0.0	1.03	163.8	111.4																																																																																																																																																																																																																																																																																					
S58.000	50.00	4.13	5.050	0.000	0.0	0.0	0.0	1.38	219.0	0.0																																																																																																																																																																																																																																																																																					
S23.010	44.42	8.08	5.000	1.124	0.0	0.0	0.0	1.03	163.8	135.3																																																																																																																																																																																																																																																																																					
S59.000	50.00	4.05	6.200	0.008	0.0	0.0	0.0	1.95	15.3	1.1																																																																																																																																																																																																																																																																																					
S59.001	50.00	4.38	5.700	0.008	0.0	0.0	0.0	1.36	24.0	1.1																																																																																																																																																																																																																																																																																					
S60.000	50.00	4.19	6.000	0.050	0.0	0.0	0.0	0.44	7.8	6.8																																																																																																																																																																																																																																																																																					
S60.001	50.00	4.30	5.990	0.050	0.0	0.0	0.0	2.27	40.1	6.8																																																																																																																																																																																																																																																																																					
S23.011	44.03	8.19	4.919	1.182	0.0	0.0	0.0	1.04	165.2	141.0																																																																																																																																																																																																																																																																																					
©1982-2018 Innovyze																																																																																																																																																																																																																																																																																															

Odyssey Markides								Page 13	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
Manhole Schedules for SW Network									
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)
S1	6.935	1.290	Open Manhole	1200	S1.000	5.645	225		
S2	6.971	1.465	Open Manhole	1200	S1.001	5.506	225	S1.000	5.506
S3	6.670	1.450	Open Manhole	1200	S1.002	5.220	300	S1.001	5.295
S4	6.780	1.953	Open Manhole	1350	S1.003	4.827	450	S1.002	4.977
S5	6.983	1.425	Open Manhole	1200	S2.000	5.558	225		
PP_3-4	7.250	1.000	Open Manhole	1200	S3.000	6.250	100		
ORI_3-4	7.250	1.010	Open Manhole	1200	S3.001	6.240	100	S3.000	6.240
PP_1-2	7.000	1.000	Open Manhole	1200	S4.000	6.000	150		
ORI_1-2	7.000	1.010	Open Manhole	1200	S4.001	5.990	150	S4.000	5.990
PP_108	7.350	1.000	Open Manhole	1200	S5.000	6.350	100		
ORI_108	7.350	1.010	Open Manhole	1200	S5.001	6.340	100	S5.000	6.340
S6	6.849	2.054	Open Manhole	1350	S1.004	4.795	450	S1.003	4.795
								S2.000	5.021
								S3.001	5.145
								S4.001	5.195
								S5.001	5.145
PP_76	7.500	1.000	Open Manhole	1200	S6.000	6.500	100		
ORI_76	7.500	1.010	Open Manhole	1200	S6.001	6.490	100	S6.000	6.490
PP_80	7.650	1.000	Open Manhole	1200	S7.000	6.650	100		
ORI_80	7.600	0.960	Open Manhole	1200	S7.001	6.640	100	S7.000	6.640
PP_79	7.350	1.000	Open Manhole	1200	S8.000	6.350	100		
ORI_79	7.350	1.010	Open Manhole	1200	S8.001	6.340	100	S8.000	6.340
PP_75	7.600	1.000	Open Manhole	1200	S9.000	6.600	100		
ORI_75	7.600	1.010	Open Manhole	1200	S9.001	6.590	100	S9.000	6.590
S7	7.512	1.350	Open Manhole	1200	S6.002	6.162	150	S6.001	6.212
								S7.001	6.212
								S8.001	6.212
								S9.001	6.212
PP_5-6	7.450	1.000	Open Manhole	1200	S10.000	6.450	150		
ORI_5-6	7.450	1.010	Open Manhole	1200	S10.001	6.440	150	S10.000	6.440
PP_7-8	7.500	1.000	Open Manhole	1200	S11.000	6.500	100		
ORI_7-8	7.500	1.010	Open Manhole	1200	S11.001	6.490	100	S11.000	6.490
PP_9-10	7.400	1.000	Open Manhole	1200	S12.000	6.400	100		
ORI_9-10	7.400	1.010	Open Manhole	1200	S12.001	6.390	100	S12.000	6.390
PP_11-12	7.250	1.000	Open Manhole	1200	S13.000	6.250	100		
ORI_11-12	7.250	1.010	Open Manhole	1200	S13.001	6.240	100	S13.000	6.240
S8	7.395	2.743	Open Manhole	1350	S1.005	4.653	450	S1.004	4.652
								S6.002	4.953
©1982-2018 Innovyze									

Odyssey Markides								Page 14	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>Manhole Schedules for SW Network</u>									
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)
								S10.001	4.953
								S11.001	5.003
								S12.001	5.003
								S13.001	5.003
PP_54	7.250	1.000	Open Manhole	1200	S14.000	6.250	100		
ORI_54	7.250	1.010	Open Manhole	1200	S14.001	6.240	100	S14.000	6.240
PP_55	7.250	1.000	Open Manhole	1200	S15.000	6.250	100		
ORI_55	7.250	1.010	Open Manhole	1200	S15.001	6.240	100	S15.000	6.240
PP_51	7.350	1.000	Open Manhole	1200	S16.000	6.350	150		
ORI_51	7.350	1.010	Open Manhole	1200	S16.001	6.340	150	S16.000	6.340
S9	7.204	2.252	Open Manhole	1200	S14.002	4.952	150	S14.001	5.002
								S15.001	5.002
								S16.001	4.952
PP_13-14	7.250	1.000	Open Manhole	1200	S17.000	6.250	150		
ORI_13-14	7.250	1.010	Open Manhole	1200	S17.001	6.240	150	S17.000	6.240
PP_15	6.850	1.000	Open Manhole	1200	S18.000	5.850	100		
ORI_15	6.850	1.010	Open Manhole	1200	S18.001	5.840	100	S18.000	5.840
S10	6.960	2.483	Open Manhole	1350	S1.006	4.477	450	S1.005	4.477
								S14.002	4.777
								S17.001	4.777
								S18.001	4.827
S11a	6.700	2.250	Open Manhole	1350	S19.000	4.450	450		
PP_18	6.800	1.000	Open Manhole	1200	S20.000	5.800	150		
ORI_18	6.800	1.010	Open Manhole	1200	S20.001	5.790	150	S20.000	5.790
PP_19-53	7.000	1.000	Open Manhole	1200	S21.000	6.000	100		
ORI_19-53	7.000	1.010	Open Manhole	1200	S21.001	5.990	100	S21.000	5.990
S11	6.702	2.303	Open Manhole	1350	S1.007	4.399	450	S1.006	4.399
								S19.000	4.399
								S20.001	4.749
								S21.001	4.749
PP_20-21	7.300	1.000	Open Manhole	1200	S22.000	6.300	150		
ORI_20-21	7.300	1.010	Open Manhole	1200	S22.001	6.290	150	S22.000	6.290
S12	7.056	2.409	Open Manhole	1200	S22.002	4.647	225	S22.001	4.722
S13	6.884	2.544	Open Manhole	1350	S1.008	4.340	450	S1.007	4.340
								S22.002	4.565
	7.000	2.690	Open Manhole	0		OUTFALL		S1.008	4.310
PP_22-23	7.450	1.000	Open Manhole	1200	S23.000	6.450	100		
©1982-2018 Innovyze									

Odyssey Markides								Page 15	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>Manhole Schedules for SW Network</u>									
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)
ORI_22-23	7.450	1.010	Open Manhole	1200	S23.001	6.440	100	S23.000	6.440
PP_24	7.450	1.000	Open Manhole	1200	S24.000	6.450	100		
ORI_24	7.450	1.010	Open Manhole	1200	S24.001	6.440	100	S24.000	6.440
S15	7.273	1.205	Open Manhole	1200	S23.002	6.068	225	S23.001	6.193
								S24.001	6.193
PP_25-26	7.350	1.000	Open Manhole	1200	S25.000	6.350	100		
ORI_25-26	7.350	1.010	Open Manhole	1200	S25.001	6.340	100	S25.000	6.340
PP_27	7.250	1.000	Open Manhole	1200	S26.000	6.250	100		
ORI_27	7.250	1.010	Open Manhole	1200	S26.001	6.240	100	S26.000	6.240
PP_28	7.250	1.000	Open Manhole	1200	S27.000	6.250	100		
ORI_28	7.250	1.010	Open Manhole	1200	S27.001	6.240	100	S27.000	6.240
S16	7.471	1.575	Open Manhole	1200	S23.003	5.896	225	S23.002	5.896
								S25.001	6.021
								S26.001	6.021
								S27.001	6.021
PP_29	7.000	1.000	Open Manhole	1200	S28.000	6.000	100		
ORI_29	7.000	1.010	Open Manhole	1200	S28.001	5.990	100	S28.000	5.990
S18	6.909	1.403	Open Manhole	1200	S23.004	5.506	300	S23.003	5.581
								S28.001	5.706
S19	6.695	1.227	Open Manhole	1200	S23.005	5.468	300	S23.004	5.468
PP_30	6.850	1.000	Open Manhole	1200	S29.000	5.850	100		
ORI_30	6.850	1.010	Open Manhole	1200	S29.001	5.840	100	S29.000	5.840
S20	6.610	1.188	Open Manhole	1200	S23.006	5.422	300	S23.005	5.422
								S29.001	5.622
PP_31	6.750	1.000	Open Manhole	1200	S30.000	5.750	100		
ORI_31	6.750	1.010	Open Manhole	1200	S30.001	5.740	100	S30.000	5.740
PP_32	7.050	1.000	Open Manhole	1200	S31.000	6.050	100		
ORI_32	7.050	1.010	Open Manhole	1200	S31.001	6.040	100	S31.000	6.040
PP_33	7.100	1.000	Open Manhole	1200	S32.000	6.100	100		
ORI_33	7.100	1.010	Open Manhole	1200	S32.001	6.090	100	S32.000	6.090
PP_34-35	7.000	1.000	Open Manhole	1200	S33.000	6.000	100		
ORI_34-35	7.000	1.010	Open Manhole	1200	S33.001	5.990	100	S33.000	5.990
PP_36	6.850	1.000	Open Manhole	1200	S34.000	5.850	100		
ORI_36	6.850	1.010	Open Manhole	1200	S34.001	5.840	100	S34.000	5.840
S21	6.639	1.411	Open Manhole	1350	S23.007	5.228	450	S23.006	5.378
								S30.001	5.578
								S31.001	5.578
								S32.001	5.578
©1982-2018 Innovyze									

Odyssey Markides								Page 16	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>Manhole Schedules for SW Network</u>									
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Pipe Out Diameter (mm)	PN	Pipes In Invert Level (m)
								S33.001	5.578
								S34.001	5.578
S23a	6.600	1.520	Open Manhole	1350	S35.000	5.080	450		
S23	6.727	1.678	Open Manhole	1350	S23.008	5.049	450	S23.007	5.049
								S35.000	5.049
S24	6.617	1.592	Open Manhole	1350	S23.009	5.025	450	S23.008	5.025
PP_81-82	7.700	1.000	Open Manhole	1200	S36.000	6.700	100		
ORI_81-82	7.700	1.010	Open Manhole	1200	S36.001	6.690	100	S36.000	6.690
PP_83	7.500	1.000	Open Manhole	1200	S37.000	6.500	100		
ORI_83	7.500	1.010	Open Manhole	1200	S37.001	6.490	100	S37.000	6.490
PP_84-85	7.500	1.000	Open Manhole	1200	S38.000	6.500	100		
ORI_84-85	7.500	1.010	Open Manhole	1200	S38.001	6.490	100	S38.000	6.490
S29	7.454	1.264	Open Manhole	1200	S36.002	6.190	150	S36.001	6.240
								S37.001	6.240
								S38.001	6.240
PP_88	6.800	1.000	Open Manhole	1200	S39.000	5.800	100		
ORI_88	6.800	1.010	Open Manhole	1200	S39.001	5.790	100	S39.000	5.790
PP_86-87	7.150	1.000	Open Manhole	1200	S40.000	6.150	150		
ORI_86-87	7.150	1.010	Open Manhole	1200	S40.001	6.140	150	S40.000	6.140
PP_49-50	7.350	1.000	Open Manhole	1200	S41.000	6.350	150		
ORI_49-50	7.350	1.010	Open Manhole	1200	S41.001	6.340	150	S41.000	6.340
PP_48	7.200	1.000	Open Manhole	1200	S42.000	6.200	100		
ORI_48	7.200	1.010	Open Manhole	1200	S42.001	6.190	100	S42.000	6.190
PP_56-78	7.200	1.000	Open Manhole	1200	S43.000	6.200	100		
ORI_56-78	7.200	1.010	Open Manhole	1200	S43.001	6.190	100	S43.000	6.190
S25	7.179	1.314	Open Manhole	1200	S41.002	5.865	225	S41.001	5.940
								S42.001	5.990
								S43.001	5.990
PP_46-47	6.950	1.000	Open Manhole	1200	S44.000	5.950	150		
ORI_46-47	6.950	1.010	Open Manhole	1200	S44.001	5.940	150	S44.000	5.940
S26	6.904	1.223	Open Manhole	1200	S41.003	5.681	225	S41.002	5.681
								S44.001	5.690
PP_41-45	7.300	1.000	Open Manhole	1200	S45.000	6.300	100		
ORI_41-45	7.300	1.010	Open Manhole	1200	S45.001	6.290	100	S45.000	6.290
S27	6.977	1.341	Open Manhole	1200	S41.004	5.636	225	S41.003	5.636
								S45.001	5.760
PP_37-38	7.250	1.000	Open Manhole	1200	S46.000	6.250	150		
ORI_37-38	7.250	1.010	Open Manhole	1200	S46.001	6.240	150	S46.000	6.240
©1982-2018 Innovyze									

Odyssey Markides								Page 17	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>Manhole Schedules for SW Network</u>									
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes Inve Level
PP_39-40	7.200	1.000	Open Manhole	1200	S47.000	6.200	150		
ORI_39-40	7.200	1.010	Open Manhole	1200	S47.001	6.190	150	S47.000	6.190
S28	7.062	1.546	Open Manhole	1200	S41.005	5.516	300	S41.004	5.516
								S46.001	5.516
								S47.001	5.516
S30	6.943	1.822	Open Manhole	1350	S36.003	5.121	450	S36.002	5.121
								S39.001	5.121
								S40.001	5.121
								S41.005	5.121
PP_105	7.150	1.000	Open Manhole	1200	S48.000	6.150	150		
ORI_105	7.150	1.010	Open Manhole	1200	S48.001	6.140	150	S48.000	6.140
PP_106	7.200	1.000	Open Manhole	1200	S49.000	6.200	100		
ORI_106	7.200	1.010	Open Manhole	1200	S49.001	6.190	100	S49.000	6.190
PP_107	7.250	1.000	Open Manhole	1200	S50.000	6.250	100		
ORI_107	7.250	1.010	Open Manhole	1200	S50.001	6.240	100	S50.000	6.240
S31	7.154	1.428	Open Manhole	1200	S48.002	5.726	300	S48.001	5.726
								S49.001	5.726
								S50.001	5.726
PP_102	6.900	1.000	Open Manhole	1200	S51.000	5.900	100		
ORI_102	6.900	1.010	Open Manhole	1200	S51.001	5.890	100	S51.000	5.890
PP_100-101	6.900	1.000	Open Manhole	1200	S52.000	5.900	100		
ORI_100-101	6.900	1.010	Open Manhole	1200	S52.001	5.890	100	S52.000	5.890
PP_103-104	6.950	1.000	Open Manhole	1200	S53.000	5.950	100		
ORI_103-104	6.950	1.010	Open Manhole	1200	S53.001	5.940	100	S53.000	5.940
S32	6.858	1.322	Open Manhole	1200	S48.003	5.536	300	S48.002	5.536
								S51.001	5.536
								S52.001	5.536
								S53.001	5.536
S33	6.732	1.311	Open Manhole	1200	S48.004	5.421	300	S48.003	5.421
S34	6.887	1.517	Open Manhole	1200	S48.005	5.370	300	S48.004	5.370
PP_99	7.200	1.000	Open Manhole	1200	S54.000	6.200	100		
ORI_99	7.200	1.010	Open Manhole	1200	S54.001	6.190	100	S54.000	6.190
S35	7.020	1.704	Open Manhole	1200	S48.006	5.316	300	S48.005	5.316
								S54.001	5.316
PP_89	7.000	1.000	Open Manhole	1200	S55.000	6.000	100		
ORI_89	7.000	1.010	Open Manhole	1200	S55.001	5.990	100	S55.000	5.990
PP_91	6.800	1.000	Open Manhole	1200	S56.000	5.800	100		
ORI_91	6.800	1.010	Open Manhole	1200	S56.001	5.790	100	S56.000	5.790
©1982-2018 Innovyze									

Odyssey Markides		Page 18
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

Manhole Schedules for SW Network

MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)	Diameter (mm)	Back (m)
S36	6.935	1.817	Open Manhole	1350	S48.007	5.118	450	S48.006	5.268	300	
								S55.001	5.468	100	
								S56.001	5.468	100	
S37	6.638	1.567	Open Manhole	1350	S48.008	5.071	450	S48.007	5.071	450	
S38	6.604	1.553	Open Manhole	1350	S36.004	5.051	450	S36.003	5.051	450	
								S48.008	5.051	450	
PP_92	6.800	1.000	Open Manhole	1200	S57.000	5.800	100				
ORI_92	6.800	1.010	Open Manhole	1200	S57.001	5.790	100	S57.000	5.790	100	
S39	6.600	1.577	Open Manhole	1350	S36.005	5.023	450	S36.004	5.023	450	
								S57.001	5.373	100	
S40a	6.500	1.450	Open Manhole	1350	S58.000	5.050	450				
S40	6.526	1.526	Open Manhole	1350	S23.010	5.000	450	S23.009	5.000	450	
								S36.005	5.000	450	
								S58.000	5.000	450	
POND	6.800	0.600	Open Manhole	1200	S59.000	6.200	100				
S41	6.800	1.100	Open Manhole	1200	S59.001	5.700	150	S59.000	5.800	100	
PP_90-98	7.000	1.000	Open Manhole	1200	S60.000	6.000	150				
ORI_90-98	7.000	1.010	Open Manhole	1200	S60.001	5.990	150	S60.000	5.990	150	
S42	6.350	1.431	Open Manhole	1350	S23.011	4.919	450	S23.010	4.919	450	
								S59.001	5.219	150	
								S60.001	5.219	150	
	7.000	2.100	Open Manhole	0		OUTFALL		S23.011	4.900	450	

Free Flowing Outfall Details for SW Network

Outfall Pipe Number	Outfall Name	C. Level (m)	I. Level (m)	Min I. Level (m)	D, L (mm)	W (mm)
---------------------	--------------	--------------	--------------	------------------	-----------	--------

S1.008		7.000	4.310	0.000	0	0
--------	--	-------	-------	-------	---	---

Free Flowing Outfall Details for SW Network

Outfall Pipe Number	Outfall Name	C. Level (m)	I. Level (m)	Min I. Level (m)	D, L (mm)	W (mm)
---------------------	--------------	--------------	--------------	------------------	-----------	--------

S23.011		7.000	4.900	0.000	0	0
---------	--	-------	-------	-------	---	---

Odyssey Markides		Page 19																														
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																															
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																															
XP Solutions Network 2018.1																																
<u>Simulation Criteria for SW Network</u> Volumetric Runoff Coeff 0.750 Additional Flow - % of Total Flow 0.000 Areal Reduction Factor 1.000 MADD Factor * 10m³/ha Storage 2.000 Hot Start (mins) 0 Inlet Coefficient 0.800 Hot Start Level (mm) 0 Flow per Person per Day (l/per/day) 0.000 Manhole Headloss Coeff (Global) 0.500 Run Time (mins) 60 Foul Sewage per hectare (l/s) 0.000 Output Interval (mins) 1 Number of Input Hydrographs 0 Number of Storage Structures 58 Number of Online Controls 57 Number of Time/Area Diagrams 0 Number of Offline Controls 0 Number of Real Time Controls 0 <u>Synthetic Rainfall Details</u> <table> <tr> <td>Rainfall Model</td> <td>FEH</td> </tr> <tr> <td>Return Period (years)</td> <td>2</td> </tr> <tr> <td>FEH Rainfall Version</td> <td>1999</td> </tr> <tr> <td>Site Location</td> <td>GB 498650 101750 SU 98650 01750</td> </tr> <tr> <td>C (1km)</td> <td>-0.025</td> </tr> <tr> <td>D1 (1km)</td> <td>0.390</td> </tr> <tr> <td>D2 (1km)</td> <td>0.245</td> </tr> <tr> <td>D3 (1km)</td> <td>0.403</td> </tr> <tr> <td>E (1km)</td> <td>0.310</td> </tr> <tr> <td>F (1km)</td> <td>2.321</td> </tr> <tr> <td>Summer Storms</td> <td>Yes</td> </tr> <tr> <td>Winter Storms</td> <td>No</td> </tr> <tr> <td>Cv (Summer)</td> <td>0.750</td> </tr> <tr> <td>Cv (Winter)</td> <td>0.840</td> </tr> <tr> <td>Storm Duration (mins)</td> <td>30</td> </tr> </table>			Rainfall Model	FEH	Return Period (years)	2	FEH Rainfall Version	1999	Site Location	GB 498650 101750 SU 98650 01750	C (1km)	-0.025	D1 (1km)	0.390	D2 (1km)	0.245	D3 (1km)	0.403	E (1km)	0.310	F (1km)	2.321	Summer Storms	Yes	Winter Storms	No	Cv (Summer)	0.750	Cv (Winter)	0.840	Storm Duration (mins)	30
Rainfall Model	FEH																															
Return Period (years)	2																															
FEH Rainfall Version	1999																															
Site Location	GB 498650 101750 SU 98650 01750																															
C (1km)	-0.025																															
D1 (1km)	0.390																															
D2 (1km)	0.245																															
D3 (1km)	0.403																															
E (1km)	0.310																															
F (1km)	2.321																															
Summer Storms	Yes																															
Winter Storms	No																															
Cv (Summer)	0.750																															
Cv (Winter)	0.840																															
Storm Duration (mins)	30																															
©1982-2018 Innovyze																																

Odyssey Markides		Page 20
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>Online Controls for SW Network</u> <u>Orifice Manhole: ORI_3-4, DS/PN: S3.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.240 <u>Orifice Manhole: ORI_1-2, DS/PN: S4.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.990 <u>Orifice Manhole: ORI_108, DS/PN: S5.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.340 <u>Orifice Manhole: ORI_76, DS/PN: S6.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.490 <u>Orifice Manhole: ORI_80, DS/PN: S7.001, Volume (m³): 1.1</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.640 <u>Orifice Manhole: ORI_79, DS/PN: S8.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.340 <u>Orifice Manhole: ORI_75, DS/PN: S9.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.590 <u>Orifice Manhole: ORI_5-6, DS/PN: S10.001, Volume (m³): 1.2</u> Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 6.440 <u>Orifice Manhole: ORI_7-8, DS/PN: S11.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.490 <u>Orifice Manhole: ORI_9-10, DS/PN: S12.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.390 <u>Orifice Manhole: ORI_11-12, DS/PN: S13.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.240		
©1982-2018 Innovyze		

Odyssey Markides		Page 21																																		
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																																			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																																			
XP Solutions	Network 2018.1																																			
<u>Orifice Manhole: ORI_54, DS/PN: S14.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.240 <u>Orifice Manhole: ORI_55, DS/PN: S15.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.240 <u>Orifice Manhole: ORI_51, DS/PN: S16.001, Volume (m³): 1.2</u> Diameter (m) 0.025 Discharge Coefficient 0.600 Invert Level (m) 6.340 <u>Orifice Manhole: ORI_13-14, DS/PN: S17.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.240 <u>Orifice Manhole: ORI_15, DS/PN: S18.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.840 <u>Orifice Manhole: ORI_18, DS/PN: S20.001, Volume (m³): 1.2</u> Diameter (m) 0.030 Discharge Coefficient 0.600 Invert Level (m) 5.790 <u>Orifice Manhole: ORI_19-53, DS/PN: S21.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 5.990 <u>Orifice Manhole: ORI_20-21, DS/PN: S22.001, Volume (m³): 1.2</u> Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 6.290 <u>Hydro-Brake® Optimum Manhole: S13, DS/PN: S1.008, Volume (m³): 7.4</u> <table><tr><td>Unit Reference</td><td>MD-SHE-0106-7000-2250-7000</td></tr><tr><td>Design Head (m)</td><td>2.250</td></tr><tr><td>Design Flow (l/s)</td><td>7.0</td></tr><tr><td>Flush-Flo™</td><td>Calculated</td></tr><tr><td>Objective</td><td>Minimise upstream storage</td></tr><tr><td>Application</td><td>Surface</td></tr><tr><td>Sump Available</td><td>Yes</td></tr><tr><td>Diameter (mm)</td><td>106</td></tr><tr><td>Invert Level (m)</td><td>4.340</td></tr><tr><td>Minimum Outlet Pipe Diameter (mm)</td><td>150</td></tr><tr><td>Suggested Manhole Diameter (mm)</td><td>1200</td></tr></table> <table><tr><td>Control Points</td><td>Head (m)</td><td>Flow (l/s)</td></tr><tr><td>Design Point (Calculated)</td><td>2.250</td><td>7.0</td></tr><tr><td>Flush-Flo™</td><td>0.458</td><td>5.9</td></tr><tr><td>Kick-Flo®</td><td>0.944</td><td>4.7</td></tr></table>			Unit Reference	MD-SHE-0106-7000-2250-7000	Design Head (m)	2.250	Design Flow (l/s)	7.0	Flush-Flo™	Calculated	Objective	Minimise upstream storage	Application	Surface	Sump Available	Yes	Diameter (mm)	106	Invert Level (m)	4.340	Minimum Outlet Pipe Diameter (mm)	150	Suggested Manhole Diameter (mm)	1200	Control Points	Head (m)	Flow (l/s)	Design Point (Calculated)	2.250	7.0	Flush-Flo™	0.458	5.9	Kick-Flo®	0.944	4.7
Unit Reference	MD-SHE-0106-7000-2250-7000																																			
Design Head (m)	2.250																																			
Design Flow (l/s)	7.0																																			
Flush-Flo™	Calculated																																			
Objective	Minimise upstream storage																																			
Application	Surface																																			
Sump Available	Yes																																			
Diameter (mm)	106																																			
Invert Level (m)	4.340																																			
Minimum Outlet Pipe Diameter (mm)	150																																			
Suggested Manhole Diameter (mm)	1200																																			
Control Points	Head (m)	Flow (l/s)																																		
Design Point (Calculated)	2.250	7.0																																		
Flush-Flo™	0.458	5.9																																		
Kick-Flo®	0.944	4.7																																		
©1982-2018 Innovyze																																				

Odyssey Markides		Page 22
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

Hydro-Brake® Optimum Manhole: S13, DS/PN: S1.008, Volume (m³): 7.4

Control Points	Head (m)	Flow (l/s)
Mean Flow over Head Range	-	5.6

The hydrological calculations have been based on the Head/Discharge relationship for the Hydro-Brake® Optimum as specified. Should another type of control device other than a Hydro-Brake Optimum® be utilised then these storage routing calculations will be invalidated

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	3.6	1.200	5.2	3.000	8.0	7.000	12.0
0.200	5.2	1.400	5.6	3.500	8.6	7.500	12.4
0.300	5.7	1.600	6.0	4.000	9.2	8.000	12.7
0.400	5.9	1.800	6.3	4.500	9.7	8.500	13.1
0.500	5.9	2.000	6.6	5.000	10.2	9.000	13.5
0.600	5.8	2.200	6.9	5.500	10.7	9.500	13.8
0.800	5.4	2.400	7.2	6.000	11.1		
1.000	4.8	2.600	7.5	6.500	11.5		

Orifice Manhole: ORI_22-23, DS/PN: S23.001, Volume (m³): 1.2

Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.440

Orifice Manhole: ORI_24, DS/PN: S24.001, Volume (m³): 1.2

Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.440

Orifice Manhole: ORI_25-26, DS/PN: S25.001, Volume (m³): 1.2

Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.340

Orifice Manhole: ORI_27, DS/PN: S26.001, Volume (m³): 1.2

Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.240

Orifice Manhole: ORI_28, DS/PN: S27.001, Volume (m³): 1.2

Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.240

Orifice Manhole: ORI_29, DS/PN: S28.001, Volume (m³): 1.2

Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 5.990

Orifice Manhole: ORI_30, DS/PN: S29.001, Volume (m³): 1.2

Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 5.840

©1982-2018 Innovyze

Odyssey Markides		Page 23
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>Orifice Manhole: ORI_31, DS/PN: S30.001, Volume (m³): 1.2</u> Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 5.740 <u>Orifice Manhole: ORI_32, DS/PN: S31.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.040 <u>Orifice Manhole: ORI_33, DS/PN: S32.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.090 <u>Orifice Manhole: ORI_34-35, DS/PN: S33.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.990 <u>Orifice Manhole: ORI_36, DS/PN: S34.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.840 <u>Orifice Manhole: ORI_81-82, DS/PN: S36.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.690 <u>Orifice Manhole: ORI_83, DS/PN: S37.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.490 <u>Orifice Manhole: ORI_84-85, DS/PN: S38.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.490 <u>Orifice Manhole: ORI_88, DS/PN: S39.001, Volume (m³): 1.2</u> Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 5.790 <u>Orifice Manhole: ORI_86-87, DS/PN: S40.001, Volume (m³): 1.2</u> Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 6.140 <u>Orifice Manhole: ORI_49-50, DS/PN: S41.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.340 <u>Orifice Manhole: ORI_48, DS/PN: S42.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.190		
©1982-2018 Innovyze		

Odyssey Markides		Page 24
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>Orifice Manhole: ORI_56-78, DS/PN: S43.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.190 <u>Orifice Manhole: ORI_46-47, DS/PN: S44.001, Volume (m³): 1.2</u> Diameter (m) 0.020 Discharge Coefficient 0.600 Invert Level (m) 5.940 <u>Orifice Manhole: ORI_41-45, DS/PN: S45.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.290 <u>Orifice Manhole: ORI_37-38, DS/PN: S46.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.240 <u>Orifice Manhole: ORI_39-40, DS/PN: S47.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.190 <u>Orifice Manhole: ORI_105, DS/PN: S48.001, Volume (m³): 1.2</u> Diameter (m) 0.050 Discharge Coefficient 0.600 Invert Level (m) 6.140 <u>Orifice Manhole: ORI_106, DS/PN: S49.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.190 <u>Orifice Manhole: ORI_107, DS/PN: S50.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 6.240 <u>Orifice Manhole: ORI_102, DS/PN: S51.001, Volume (m³): 1.2</u> Diameter (m) 0.025 Discharge Coefficient 0.600 Invert Level (m) 5.890 <u>Orifice Manhole: ORI_100-101, DS/PN: S52.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.890 <u>Orifice Manhole: ORI_103-104, DS/PN: S53.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 5.940 <u>Orifice Manhole: ORI_99, DS/PN: S54.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 6.190		
©1982-2018 Innovyze		

Odyssey Markides		Page 25																																																																																					
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																																																																																						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																																																																																						
XP Solutions	Network 2018.1																																																																																						
<u>Orifice Manhole: ORI_89, DS/PN: S55.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 5.990 <u>Orifice Manhole: ORI_91, DS/PN: S56.001, Volume (m³): 1.2</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 5.790 <u>Orifice Manhole: ORI_92, DS/PN: S57.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.790 <u>Orifice Manhole: S41, DS/PN: S59.001, Volume (m³): 1.3</u> Diameter (m) 0.010 Discharge Coefficient 0.600 Invert Level (m) 5.700 <u>Orifice Manhole: ORI_90-98, DS/PN: S60.001, Volume (m³): 1.2</u> Diameter (m) 0.015 Discharge Coefficient 0.600 Invert Level (m) 5.990 <u>Hydro-Brake® Optimum Manhole: S42, DS/PN: S23.011, Volume (m³): 7.5</u> <table><tr><td>Unit Reference</td><td>MD-SHE-0114-7000-1650-7000</td></tr><tr><td>Design Head (m)</td><td>1.650</td></tr><tr><td>Design Flow (l/s)</td><td>7.0</td></tr><tr><td>Flush-Flo™</td><td>Calculated</td></tr><tr><td>Objective</td><td>Minimise upstream storage</td></tr><tr><td>Application</td><td>Surface</td></tr><tr><td>Sump Available</td><td>Yes</td></tr><tr><td>Diameter (mm)</td><td>114</td></tr><tr><td>Invert Level (m)</td><td>4.919</td></tr><tr><td>Minimum Outlet Pipe Diameter (mm)</td><td>150</td></tr><tr><td>Suggested Manhole Diameter (mm)</td><td>1200</td></tr></table> <table><tr><th>Control Points</th><th>Head (m)</th><th>Flow (l/s)</th></tr><tr><td>Design Point (Calculated)</td><td>1.650</td><td>7.0</td></tr><tr><td>Flush-Flo™</td><td>0.492</td><td>7.0</td></tr><tr><td>Kick-Flo®</td><td>1.008</td><td>5.6</td></tr><tr><td>Mean Flow over Head Range</td><td>-</td><td>6.1</td></tr></table> The hydrological calculations have been based on the Head/Discharge relationship for the Hydro-Brake® Optimum as specified. Should another type of control device other than a Hydro-Brake Optimum® be utilised then these storage routing calculations will be invalidated <table><tr><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th></tr><tr><td>0.100</td><td>4.0</td><td>0.600</td><td>6.9</td><td>1.600</td><td>6.9</td><td>2.600</td><td>8.7</td></tr><tr><td>0.200</td><td>6.1</td><td>0.800</td><td>6.6</td><td>1.800</td><td>7.3</td><td>3.000</td><td>9.3</td></tr><tr><td>0.300</td><td>6.7</td><td>1.000</td><td>5.6</td><td>2.000</td><td>7.7</td><td>3.500</td><td>10.0</td></tr><tr><td>0.400</td><td>6.9</td><td>1.200</td><td>6.0</td><td>2.200</td><td>8.0</td><td>4.000</td><td>10.6</td></tr><tr><td>0.500</td><td>7.0</td><td>1.400</td><td>6.5</td><td>2.400</td><td>8.3</td><td>4.500</td><td>11.2</td></tr></table>			Unit Reference	MD-SHE-0114-7000-1650-7000	Design Head (m)	1.650	Design Flow (l/s)	7.0	Flush-Flo™	Calculated	Objective	Minimise upstream storage	Application	Surface	Sump Available	Yes	Diameter (mm)	114	Invert Level (m)	4.919	Minimum Outlet Pipe Diameter (mm)	150	Suggested Manhole Diameter (mm)	1200	Control Points	Head (m)	Flow (l/s)	Design Point (Calculated)	1.650	7.0	Flush-Flo™	0.492	7.0	Kick-Flo®	1.008	5.6	Mean Flow over Head Range	-	6.1	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	0.100	4.0	0.600	6.9	1.600	6.9	2.600	8.7	0.200	6.1	0.800	6.6	1.800	7.3	3.000	9.3	0.300	6.7	1.000	5.6	2.000	7.7	3.500	10.0	0.400	6.9	1.200	6.0	2.200	8.0	4.000	10.6	0.500	7.0	1.400	6.5	2.400	8.3	4.500	11.2
Unit Reference	MD-SHE-0114-7000-1650-7000																																																																																						
Design Head (m)	1.650																																																																																						
Design Flow (l/s)	7.0																																																																																						
Flush-Flo™	Calculated																																																																																						
Objective	Minimise upstream storage																																																																																						
Application	Surface																																																																																						
Sump Available	Yes																																																																																						
Diameter (mm)	114																																																																																						
Invert Level (m)	4.919																																																																																						
Minimum Outlet Pipe Diameter (mm)	150																																																																																						
Suggested Manhole Diameter (mm)	1200																																																																																						
Control Points	Head (m)	Flow (l/s)																																																																																					
Design Point (Calculated)	1.650	7.0																																																																																					
Flush-Flo™	0.492	7.0																																																																																					
Kick-Flo®	1.008	5.6																																																																																					
Mean Flow over Head Range	-	6.1																																																																																					
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																																																																																
0.100	4.0	0.600	6.9	1.600	6.9	2.600	8.7																																																																																
0.200	6.1	0.800	6.6	1.800	7.3	3.000	9.3																																																																																
0.300	6.7	1.000	5.6	2.000	7.7	3.500	10.0																																																																																
0.400	6.9	1.200	6.0	2.200	8.0	4.000	10.6																																																																																
0.500	7.0	1.400	6.5	2.400	8.3	4.500	11.2																																																																																
©1982-2018 Innovyze																																																																																							

Odyssey Markides		Page 26																																
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																																	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																																	
XP Solutions Network 2018.1																																		
<u>Hydro-Brake® Optimum Manhole: S42, DS/PN: S23.011, Volume (m³): 7.5</u> <table border="1"> <thead> <tr> <th>Depth (m)</th> <th>Flow (l/s)</th> <th>Depth (m)</th> <th>Flow (l/s)</th> <th>Depth (m)</th> <th>Flow (l/s)</th> <th>Depth (m)</th> <th>Flow (l/s)</th> </tr> </thead> <tbody> <tr> <td>5.000</td> <td>11.8</td> <td>6.500</td> <td>13.4</td> <td>8.000</td> <td>14.8</td> <td>9.500</td> <td>16.0</td> </tr> <tr> <td>5.500</td> <td>12.4</td> <td>7.000</td> <td>13.9</td> <td>8.500</td> <td>15.2</td> <td></td> <td></td> </tr> <tr> <td>6.000</td> <td>12.9</td> <td>7.500</td> <td>14.3</td> <td>9.000</td> <td>15.6</td> <td></td> <td></td> </tr> </tbody> </table>			Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	5.000	11.8	6.500	13.4	8.000	14.8	9.500	16.0	5.500	12.4	7.000	13.9	8.500	15.2			6.000	12.9	7.500	14.3	9.000	15.6		
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																											
5.000	11.8	6.500	13.4	8.000	14.8	9.500	16.0																											
5.500	12.4	7.000	13.9	8.500	15.2																													
6.000	12.9	7.500	14.3	9.000	15.6																													
©1982-2018 Innovyze																																		

Odyssey Markides		Page 27
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		
<u>Storage Structures for SW Network</u>		
<u>Porous Car Park Manhole: PP_3-4, DS/PN: S3.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 6.0
Membrane Percolation (mm/hr)	1000	Length (m) 12.0
Max Percolation (l/s)	20.0	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.250	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_1-2, DS/PN: S4.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 6.0
Membrane Percolation (mm/hr)	1000	Length (m) 12.0
Max Percolation (l/s)	20.0	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.000	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_108, DS/PN: S5.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 3.5
Membrane Percolation (mm/hr)	1000	Length (m) 5.0
Max Percolation (l/s)	4.9	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.350	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_76, DS/PN: S6.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 3.0
Membrane Percolation (mm/hr)	1000	Length (m) 12.5
Max Percolation (l/s)	10.4	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.500	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_80, DS/PN: S7.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 3.0
Membrane Percolation (mm/hr)	1000	Length (m) 15.0
Max Percolation (l/s)	12.5	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.650	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_79, DS/PN: S8.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Max Percolation (l/s) 10.4
Membrane Percolation (mm/hr)	1000	Safety Factor 2.0
©1982-2018 Innovyze		

Odyssey Markides		Page 28
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>Porous Car Park Manhole: PP_79, DS/PN: S8.000</u>		
Porosity 0.30 Slope (1:X) 500.0		
Invert Level (m) 6.350 Depression Storage (mm) 5		
Width (m) 3.0 Evaporation (mm/day) 3		
Length (m) 12.5 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_75, DS/PN: S9.000</u>		
Infiltration Coefficient Base (m/hr) 0.00000 Width (m) 4.0		
Membrane Percolation (mm/hr) 1000 Length (m) 8.5		
Max Percolation (l/s) 9.4 Slope (1:X) 500.0		
Safety Factor 2.0 Depression Storage (mm) 5		
Porosity 0.30 Evaporation (mm/day) 3		
Invert Level (m) 6.600 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_5-6, DS/PN: S10.000</u>		
Infiltration Coefficient Base (m/hr) 0.00000 Width (m) 6.0		
Membrane Percolation (mm/hr) 1000 Length (m) 12.0		
Max Percolation (l/s) 20.0 Slope (1:X) 500.0		
Safety Factor 2.0 Depression Storage (mm) 5		
Porosity 0.30 Evaporation (mm/day) 3		
Invert Level (m) 6.450 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_7-8, DS/PN: S11.000</u>		
Infiltration Coefficient Base (m/hr) 0.00000 Width (m) 6.0		
Membrane Percolation (mm/hr) 1000 Length (m) 12.0		
Max Percolation (l/s) 20.0 Slope (1:X) 500.0		
Safety Factor 2.0 Depression Storage (mm) 5		
Porosity 0.30 Evaporation (mm/day) 3		
Invert Level (m) 6.500 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_9-10, DS/PN: S12.000</u>		
Infiltration Coefficient Base (m/hr) 0.00000 Width (m) 6.0		
Membrane Percolation (mm/hr) 1000 Length (m) 12.0		
Max Percolation (l/s) 20.0 Slope (1:X) 500.0		
Safety Factor 2.0 Depression Storage (mm) 5		
Porosity 0.30 Evaporation (mm/day) 3		
Invert Level (m) 6.400 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_11-12, DS/PN: S13.000</u>		
Infiltration Coefficient Base (m/hr) 0.00000 Width (m) 6.0		
Membrane Percolation (mm/hr) 1000 Length (m) 12.0		
Max Percolation (l/s) 20.0 Slope (1:X) 500.0		
Safety Factor 2.0 Depression Storage (mm) 5		
Porosity 0.30 Evaporation (mm/day) 3		
Invert Level (m) 6.250 Membrane Depth (mm) 300		
©1982-2018 Innovyze		

Odyssey Markides		Page 29																																																																																																																																				
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																																																																																																																																					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																																																																																																																																					
XP Solutions	Network 2018.1																																																																																																																																					
<u>Porous Car Park Manhole: PP_54, DS/PN: S14.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>3.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>12.5</td></tr><tr><td>Max Percolation (l/s)</td><td>10.4</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.250</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_55, DS/PN: S15.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>3.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>8.5</td></tr><tr><td>Max Percolation (l/s)</td><td>7.1</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.250</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_51, DS/PN: S16.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>3.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>12.0</td></tr><tr><td>Max Percolation (l/s)</td><td>10.0</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.350</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_13-14, DS/PN: S17.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>6.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>12.0</td></tr><tr><td>Max Percolation (l/s)</td><td>20.0</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.000</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_15, DS/PN: S18.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>5.5</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>8.5</td></tr><tr><td>Max Percolation (l/s)</td><td>13.0</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>5.850</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Cellular Storage Manhole: S11a, DS/PN: S19.000</u> <table><tr><td>Invert Level (m)</td><td>4.450</td><td>Safety Factor</td><td>2.0</td></tr><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Porosity</td><td>0.95</td></tr><tr><td>Infiltration Coefficient Side (m/hr)</td><td>0.00000</td><td></td><td></td></tr></table>			Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0	Membrane Percolation (mm/hr)	1000	Length (m)	12.5	Max Percolation (l/s)	10.4	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.250	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0	Membrane Percolation (mm/hr)	1000	Length (m)	8.5	Max Percolation (l/s)	7.1	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.250	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0	Membrane Percolation (mm/hr)	1000	Length (m)	12.0	Max Percolation (l/s)	10.0	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.350	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0	Membrane Percolation (mm/hr)	1000	Length (m)	12.0	Max Percolation (l/s)	20.0	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.000	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	5.5	Membrane Percolation (mm/hr)	1000	Length (m)	8.5	Max Percolation (l/s)	13.0	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	5.850	Membrane Depth (mm)	300	Invert Level (m)	4.450	Safety Factor	2.0	Infiltration Coefficient Base (m/hr)	0.00000	Porosity	0.95	Infiltration Coefficient Side (m/hr)	0.00000		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0																																																																																																																																			
Membrane Percolation (mm/hr)	1000	Length (m)	12.5																																																																																																																																			
Max Percolation (l/s)	10.4	Slope (1:X)	500.0																																																																																																																																			
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																			
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																			
Invert Level (m)	6.250	Membrane Depth (mm)	300																																																																																																																																			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0																																																																																																																																			
Membrane Percolation (mm/hr)	1000	Length (m)	8.5																																																																																																																																			
Max Percolation (l/s)	7.1	Slope (1:X)	500.0																																																																																																																																			
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																			
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																			
Invert Level (m)	6.250	Membrane Depth (mm)	300																																																																																																																																			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0																																																																																																																																			
Membrane Percolation (mm/hr)	1000	Length (m)	12.0																																																																																																																																			
Max Percolation (l/s)	10.0	Slope (1:X)	500.0																																																																																																																																			
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																			
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																			
Invert Level (m)	6.350	Membrane Depth (mm)	300																																																																																																																																			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0																																																																																																																																			
Membrane Percolation (mm/hr)	1000	Length (m)	12.0																																																																																																																																			
Max Percolation (l/s)	20.0	Slope (1:X)	500.0																																																																																																																																			
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																			
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																			
Invert Level (m)	6.000	Membrane Depth (mm)	300																																																																																																																																			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	5.5																																																																																																																																			
Membrane Percolation (mm/hr)	1000	Length (m)	8.5																																																																																																																																			
Max Percolation (l/s)	13.0	Slope (1:X)	500.0																																																																																																																																			
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																			
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																			
Invert Level (m)	5.850	Membrane Depth (mm)	300																																																																																																																																			
Invert Level (m)	4.450	Safety Factor	2.0																																																																																																																																			
Infiltration Coefficient Base (m/hr)	0.00000	Porosity	0.95																																																																																																																																			
Infiltration Coefficient Side (m/hr)	0.00000																																																																																																																																					
©1982-2018 Innovyze																																																																																																																																						

Odyssey Markides		Page 30
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

Cellular Storage Manhole: S11a, DS/PN: S19.000

Depth (m)	Area (m ²)	Inf. Area (m ²)	Depth (m)	Area (m ²)	Inf. Area (m ²)
0.000	132.0	132.0	1.626	0.0	210.4
1.625	132.0	210.4			

Porous Car Park Manhole: PP_18, DS/PN: S20.000

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0
Membrane Percolation (mm/hr)	1000	Length (m)	13.0
Max Percolation (l/s)	10.8	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	5.800	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_19-53, DS/PN: S21.000

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	5.0
Membrane Percolation (mm/hr)	1000	Length (m)	15.0
Max Percolation (l/s)	20.8	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.000	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_20-21, DS/PN: S22.000

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	7.0
Membrane Percolation (mm/hr)	1000	Length (m)	10.0
Max Percolation (l/s)	19.4	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.300	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_22-23, DS/PN: S23.000

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0
Membrane Percolation (mm/hr)	1000	Length (m)	13.0
Max Percolation (l/s)	21.7	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.450	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_24, DS/PN: S24.000

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0
Membrane Percolation (mm/hr)	1000	Length (m)	11.0
Max Percolation (l/s)	9.2	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.450	Membrane Depth (mm)	300

©1982-2018 Innovyze

Odyssey Markides		Page 31	
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton		
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH		
XP Solutions Network 2018.1			
<u>Porous Car Park Manhole: PP_25-26, DS/PN: S25.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0
Membrane Percolation (mm/hr)	1000	Length (m)	12.0
Max Percolation (l/s)	20.0	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.350	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_27, DS/PN: S26.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0
Membrane Percolation (mm/hr)	1000	Length (m)	8.5
Max Percolation (l/s)	14.2	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.250	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_28, DS/PN: S27.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0
Membrane Percolation (mm/hr)	1000	Length (m)	10.0
Max Percolation (l/s)	8.3	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.000	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_29, DS/PN: S28.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0
Membrane Percolation (mm/hr)	1000	Length (m)	10.0
Max Percolation (l/s)	8.3	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.000	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_30, DS/PN: S29.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	4.0
Membrane Percolation (mm/hr)	1000	Length (m)	10.0
Max Percolation (l/s)	11.1	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	5.850	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_31, DS/PN: S30.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Invert Level (m)	5.750
Membrane Percolation (mm/hr)	1000	Width (m)	6.0
Max Percolation (l/s)	11.7	Length (m)	7.0
Safety Factor	2.0	Slope (1:X)	500.0
Porosity	0.30	Depression Storage (mm)	5
©1982-2018 Innovyze			

Odyssey Markides		Page 32
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

Porous Car Park Manhole: PP_31, DS/PN: S30.000

Evaporation (mm/day) 3 Membrane Depth (mm) 300

Porous Car Park Manhole: PP_32, DS/PN: S31.000

Infiltration Coefficient Base (m/hr) 0.00000	Width (m)	5.0
Membrane Percolation (mm/hr) 1000	Length (m)	8.0
Max Percolation (l/s) 11.1	Slope (1:X)	500.0
Safety Factor 2.0	Depression Storage (mm)	5
Porosity 0.30	Evaporation (mm/day)	3
Invert Level (m) 6.050	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_33, DS/PN: S32.000

Infiltration Coefficient Base (m/hr) 0.00000	Width (m)	3.0
Membrane Percolation (mm/hr) 1000	Length (m)	12.0
Max Percolation (l/s) 10.0	Slope (1:X)	500.0
Safety Factor 2.0	Depression Storage (mm)	5
Porosity 0.30	Evaporation (mm/day)	3
Invert Level (m) 6.100	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_34-35, DS/PN: S33.000

Infiltration Coefficient Base (m/hr) 0.00000	Width (m)	5.0
Membrane Percolation (mm/hr) 1000	Length (m)	11.0
Max Percolation (l/s) 15.3	Slope (1:X)	500.0
Safety Factor 2.0	Depression Storage (mm)	5
Porosity 0.30	Evaporation (mm/day)	3
Invert Level (m) 6.000	Membrane Depth (mm)	300

Porous Car Park Manhole: PP_36, DS/PN: S34.000

Infiltration Coefficient Base (m/hr) 0.00000	Width (m)	6.0
Membrane Percolation (mm/hr) 1000	Length (m)	6.0
Max Percolation (l/s) 10.0	Slope (1:X)	500.0
Safety Factor 2.0	Depression Storage (mm)	5
Porosity 0.30	Evaporation (mm/day)	3
Invert Level (m) 6.000	Membrane Depth (mm)	300

Cellular Storage Manhole: S23a, DS/PN: S35.000

Invert Level (m) 5.080	Safety Factor 2.0
Infiltration Coefficient Base (m/hr) 0.00000	Porosity 0.95
Infiltration Coefficient Side (m/hr) 0.00000	

Depth (m)	Area (m ²)	Inf. Area (m ²)	Depth (m)	Area (m ²)	Inf. Area (m ²)
0.000	264.0	264.0	0.501	0.0	305.0
0.500	264.0	305.0			

©1982-2018 Innovyze

Odyssey Markides		Page 33																																																																																																																																												
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																																																																																																																																													
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																																																																																																																																													
XP Solutions Network 2018.1																																																																																																																																														
<u>Porous Car Park Manhole: PP_81-82, DS/PN: S36.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>5.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>9.5</td></tr><tr><td>Max Percolation (l/s)</td><td>13.2</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.700</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_83, DS/PN: S37.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>3.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>8.0</td></tr><tr><td>Max Percolation (l/s)</td><td>6.7</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.500</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_84-85, DS/PN: S38.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>6.5</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>12.0</td></tr><tr><td>Max Percolation (l/s)</td><td>21.7</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.500</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_88, DS/PN: S39.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>3.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>8.0</td></tr><tr><td>Max Percolation (l/s)</td><td>6.7</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>5.800</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_86-87, DS/PN: S40.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Width (m)</td><td>6.0</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Length (m)</td><td>12.0</td></tr><tr><td>Max Percolation (l/s)</td><td>20.0</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Depression Storage (mm)</td><td>5</td></tr><tr><td>Porosity</td><td>0.30</td><td>Evaporation (mm/day)</td><td>3</td></tr><tr><td>Invert Level (m)</td><td>6.150</td><td>Membrane Depth (mm)</td><td>300</td></tr></table> <u>Porous Car Park Manhole: PP_49-50, DS/PN: S41.000</u> <table><tr><td>Infiltration Coefficient Base (m/hr)</td><td>0.00000</td><td>Invert Level (m)</td><td>6.350</td></tr><tr><td>Membrane Percolation (mm/hr)</td><td>1000</td><td>Width (m)</td><td>6.0</td></tr><tr><td>Max Percolation (l/s)</td><td>20.0</td><td>Length (m)</td><td>12.0</td></tr><tr><td>Safety Factor</td><td>2.0</td><td>Slope (1:X)</td><td>500.0</td></tr><tr><td>Porosity</td><td>0.30</td><td>Depression Storage (mm)</td><td>5</td></tr></table>			Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	5.0	Membrane Percolation (mm/hr)	1000	Length (m)	9.5	Max Percolation (l/s)	13.2	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.700	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0	Membrane Percolation (mm/hr)	1000	Length (m)	8.0	Max Percolation (l/s)	6.7	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.500	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.5	Membrane Percolation (mm/hr)	1000	Length (m)	12.0	Max Percolation (l/s)	21.7	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.500	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0	Membrane Percolation (mm/hr)	1000	Length (m)	8.0	Max Percolation (l/s)	6.7	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	5.800	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0	Membrane Percolation (mm/hr)	1000	Length (m)	12.0	Max Percolation (l/s)	20.0	Slope (1:X)	500.0	Safety Factor	2.0	Depression Storage (mm)	5	Porosity	0.30	Evaporation (mm/day)	3	Invert Level (m)	6.150	Membrane Depth (mm)	300	Infiltration Coefficient Base (m/hr)	0.00000	Invert Level (m)	6.350	Membrane Percolation (mm/hr)	1000	Width (m)	6.0	Max Percolation (l/s)	20.0	Length (m)	12.0	Safety Factor	2.0	Slope (1:X)	500.0	Porosity	0.30	Depression Storage (mm)	5
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	5.0																																																																																																																																											
Membrane Percolation (mm/hr)	1000	Length (m)	9.5																																																																																																																																											
Max Percolation (l/s)	13.2	Slope (1:X)	500.0																																																																																																																																											
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																											
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																											
Invert Level (m)	6.700	Membrane Depth (mm)	300																																																																																																																																											
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0																																																																																																																																											
Membrane Percolation (mm/hr)	1000	Length (m)	8.0																																																																																																																																											
Max Percolation (l/s)	6.7	Slope (1:X)	500.0																																																																																																																																											
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																											
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																											
Invert Level (m)	6.500	Membrane Depth (mm)	300																																																																																																																																											
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.5																																																																																																																																											
Membrane Percolation (mm/hr)	1000	Length (m)	12.0																																																																																																																																											
Max Percolation (l/s)	21.7	Slope (1:X)	500.0																																																																																																																																											
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																											
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																											
Invert Level (m)	6.500	Membrane Depth (mm)	300																																																																																																																																											
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0																																																																																																																																											
Membrane Percolation (mm/hr)	1000	Length (m)	8.0																																																																																																																																											
Max Percolation (l/s)	6.7	Slope (1:X)	500.0																																																																																																																																											
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																											
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																											
Invert Level (m)	5.800	Membrane Depth (mm)	300																																																																																																																																											
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0																																																																																																																																											
Membrane Percolation (mm/hr)	1000	Length (m)	12.0																																																																																																																																											
Max Percolation (l/s)	20.0	Slope (1:X)	500.0																																																																																																																																											
Safety Factor	2.0	Depression Storage (mm)	5																																																																																																																																											
Porosity	0.30	Evaporation (mm/day)	3																																																																																																																																											
Invert Level (m)	6.150	Membrane Depth (mm)	300																																																																																																																																											
Infiltration Coefficient Base (m/hr)	0.00000	Invert Level (m)	6.350																																																																																																																																											
Membrane Percolation (mm/hr)	1000	Width (m)	6.0																																																																																																																																											
Max Percolation (l/s)	20.0	Length (m)	12.0																																																																																																																																											
Safety Factor	2.0	Slope (1:X)	500.0																																																																																																																																											
Porosity	0.30	Depression Storage (mm)	5																																																																																																																																											
©1982-2018 Innovyze																																																																																																																																														

Odyssey Markides		Page 34
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		
<u>Porous Car Park Manhole: PP_49-50, DS/PN: S41.000</u>		
Evaporation (mm/day) 3 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_48, DS/PN: S42.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 3.0
Membrane Percolation (mm/hr)	1000	Length (m) 12.0
Max Percolation (l/s)	10.0	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.200	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_56-78, DS/PN: S43.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 14.0
Membrane Percolation (mm/hr)	1000	Length (m) 50.0
Max Percolation (l/s)	194.4	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.200	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_46-47, DS/PN: S44.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 6.0
Membrane Percolation (mm/hr)	1000	Length (m) 12.0
Max Percolation (l/s)	20.0	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	5.950	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_41-45, DS/PN: S45.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 13.0
Membrane Percolation (mm/hr)	1000	Length (m) 20.0
Max Percolation (l/s)	72.2	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.300	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_37-38, DS/PN: S46.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 6.0
Membrane Percolation (mm/hr)	1000	Length (m) 11.5
Max Percolation (l/s)	19.2	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.250	Membrane Depth (mm) 300
©1982-2018 Innovyze		

Odyssey Markides		Page 35	
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton		
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH		
XP Solutions	Network 2018.1		
<u>Porous Car Park Manhole: PP_39-40, DS/PN: S47.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0
Membrane Percolation (mm/hr)	1000	Length (m)	11.5
Max Percolation (l/s)	19.2	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.200	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_105, DS/PN: S48.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	5.0
Membrane Percolation (mm/hr)	1000	Length (m)	6.5
Max Percolation (l/s)	9.0	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.150	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_106, DS/PN: S49.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	3.0
Membrane Percolation (mm/hr)	1000	Length (m)	10.0
Max Percolation (l/s)	8.3	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.200	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_107, DS/PN: S50.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.5
Membrane Percolation (mm/hr)	1000	Length (m)	7.0
Max Percolation (l/s)	12.6	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.250	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_102, DS/PN: S51.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	2.5
Membrane Percolation (mm/hr)	1000	Length (m)	12.0
Max Percolation (l/s)	8.3	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	5.900	Membrane Depth (mm)	300
<u>Porous Car Park Manhole: PP_100-101, DS/PN: S52.000</u>			
Infiltration Coefficient Base (m/hr)	0.00000	Invert Level (m)	5.900
Membrane Percolation (mm/hr)	1000	Width (m)	5.0
Max Percolation (l/s)	13.9	Length (m)	10.0
Safety Factor	2.0	Slope (1:X)	500.0
Porosity	0.30	Depression Storage (mm)	5
©1982-2018 Innovyze			

Odyssey Markides		Page 36
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		
<u>Porous Car Park Manhole: PP_100-101, DS/PN: S52.000</u>		
Evaporation (mm/day) 3 Membrane Depth (mm) 300		
<u>Porous Car Park Manhole: PP_103-104, DS/PN: S53.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 6.0
Membrane Percolation (mm/hr)	1000	Length (m) 12.5
Max Percolation (l/s)	20.8	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	5.950	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_99, DS/PN: S54.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 5.0
Membrane Percolation (mm/hr)	1000	Length (m) 5.0
Max Percolation (l/s)	6.9	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.200	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_89, DS/PN: S55.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 5.0
Membrane Percolation (mm/hr)	1000	Length (m) 6.5
Max Percolation (l/s)	9.0	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	6.000	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_91, DS/PN: S56.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 5.0
Membrane Percolation (mm/hr)	1000	Length (m) 5.5
Max Percolation (l/s)	7.6	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	5.800	Membrane Depth (mm) 300
<u>Porous Car Park Manhole: PP_92, DS/PN: S57.000</u>		
Infiltration Coefficient Base (m/hr)	0.00000	Width (m) 5.0
Membrane Percolation (mm/hr)	1000	Length (m) 6.0
Max Percolation (l/s)	8.3	Slope (1:X) 500.0
Safety Factor	2.0	Depression Storage (mm) 5
Porosity	0.30	Evaporation (mm/day) 3
Invert Level (m)	5.800	Membrane Depth (mm) 300
©1982-2018 Innovyze		

Odyssey Markides		Page 37
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

Cellular Storage Manhole: S40a, DS/PN: S58.000

Invert Level (m) 5.050 Safety Factor 2.0
Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95
Infiltration Coefficient Side (m/hr) 0.00000

Depth (m)	Area (m ²)	Inf. Area (m ²)	Depth (m)	Area (m ²)	Inf. Area (m ²)
0.000	208.0	208.0	1.001	0.0	276.0
1.000	208.0	276.0			

Tank or Pond Manhole: POND, DS/PN: S59.000

Invert Level (m) 6.200

Depth (m)	Area (m ²)	Depth (m)	Area (m ²)
0.000	20.0	0.600	85.0

Porous Car Park Manhole: PP_90-98, DS/PN: S60.000

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	10.0
Membrane Percolation (mm/hr)	1000	Length (m)	20.0
Max Percolation (l/s)	55.6	Slope (1:X)	500.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	6.000	Membrane Depth (mm)	300

©1982-2018 Innovyze

Odyssey Markides		Page 38
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)
for SW Network

Simulation Criteria

Areal Reduction Factor	1.000	Additional Flow - % of Total Flow	0.000
Hot Start (mins)	0	MADD Factor * 10m ³ /ha Storage	2.000
Hot Start Level (mm)	0	Inlet Coefficient	0.800
Manhole Headloss Coeff (Global)	0.500	Flow per Person per Day (l/per/day)	0.000
Foul Sewage per hectare (l/s)	0.000		

Number of Input Hydrographs	0	Number of Storage Structures	58
Number of Online Controls	57	Number of Time/Area Diagrams	0
Number of Offline Controls	0	Number of Real Time Controls	0

Synthetic Rainfall Details

Rainfall Model	FEH
FEH Rainfall Version	1999
Site Location	GB 498650 101750 SU 98650 01750
C (1km)	-0.025
D1 (1km)	0.390
D2 (1km)	0.245
D3 (1km)	0.403
E (1km)	0.310
F (1km)	2.321
Cv (Summer)	0.750
Cv (Winter)	0.840

Margin for Flood Risk Warning (mm)	300.0
Analysis Timestep	2.5 Second Increment (Extended)
DTS Status	OFF
DVD Status	ON
Inertia Status	ON

Profile(s)	Summer and Winter
Duration(s) (mins)	15, 30, 60, 120, 240, 360, 480, 960, 1440
Return Period(s) (years)	1, 30, 100
Climate Change (%)	0, 0, 40

PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surge	First (Y) Flood	First (Z) Overflow	Overflow Act.
S1.000	S1	15 Winter	1	+0%	100/240 Summer			
S1.001	S2	15 Winter	1	+0%	100/15 Summer			
S1.002	S3	15 Winter	1	+0%	100/15 Summer			
S1.003	S4	15 Winter	1	+0%	100/15 Summer			
S2.000	S5	15 Winter	1	+0%	100/120 Winter			
S3.000	PP_3-4	960 Winter	1	+0%	1/480 Winter			
S3.001	ORI_3-4	960 Winter	1	+0%	1/360 Winter			
S4.000	PP_1-2	480 Winter	1	+0%	30/30 Summer			
S4.001	ORI_1-2	480 Winter	1	+0%	30/15 Winter			
S5.000	PP_108	120 Winter	1	+0%	30/15 Summer			
S5.001	ORI_108	120 Winter	1	+0%	30/15 Summer			

©1982-2018 Innovyze

Odyssey Markides							Page 39		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S1.000	S1	5.676	-0.194	0.000	0.05		1.7	OK	
S1.001	S2	5.562	-0.169	0.000	0.14		5.3	OK	
S1.002	S3	5.295	-0.225	0.000	0.14		9.7	OK	
S1.003	S4	4.926	-0.351	0.000	0.09		9.7	OK	
S2.000	S5	5.585	-0.198	0.000	0.04		3.6	OK	
S3.000	PP_3-4	6.352	0.002	0.000	0.02		0.1	SURCHARGED	
S3.001	ORI_3-4	6.352	0.012	0.000	0.00		0.1	SURCHARGED	
S4.000	PP_1-2	6.098	-0.052	0.000	0.02		0.2	OK	
S4.001	ORI_1-2	6.098	-0.042	0.000	0.00		0.1	OK	
S5.000	PP_108	6.417	-0.033	0.000	0.04		0.1	OK	
S5.001	ORI_108	6.416	-0.024	0.000	0.01		0.1	OK	
©1982-2018 Innovyze									

Odyssey Markides						Page 40	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow Overflow Act.
S1.004	S6	15 Winter	1	+0%	100/15 Summer		
S6.000	PP_76	480 Winter	1	+0%	30/30 Summer		
S6.001	ORI_76	480 Winter	1	+0%	30/15 Winter		
S7.000	PP_80	480 Winter	1	+0%	30/15 Winter		
S7.001	ORI_80	480 Winter	1	+0%	30/15 Summer		
S8.000	PP_79	240 Winter	1	+0%	30/15 Summer		
S8.001	ORI_79	240 Winter	1	+0%	30/15 Summer		
S9.000	PP_75	480 Winter	1	+0%	30/15 Summer		
S9.001	ORI_75	480 Winter	1	+0%	30/15 Summer		
S6.002	S7	15 Winter	1	+0%	100/360 Winter		
S10.000	PP_5-6	240 Winter	1	+0%	30/15 Winter		
S10.001	ORI_5-6	240 Winter	1	+0%	30/15 Summer		
S11.000	PP_7-8	960 Winter	1	+0%	1/480 Winter		
S11.001	ORI_7-8	960 Winter	1	+0%	1/360 Winter		
S12.000	PP_9-10	960 Winter	1	+0%	30/15 Winter		
S12.001	ORI_9-10	960 Winter	1	+0%	30/15 Summer		
S13.000	PP_11-12	480 Winter	1	+0%	30/30 Winter		
S13.001	ORI_11-12	480 Winter	1	+0%	30/30 Summer		
S1.005	S8	15 Winter	1	+0%	30/360 Winter		
S14.000	PP_54	480 Winter	1	+0%	30/15 Summer		
S14.001	ORI_54	480 Winter	1	+0%	30/15 Summer		
S15.000	PP_55	120 Winter	1	+0%	30/15 Summer		
S15.001	ORI_55	120 Winter	1	+0%	30/15 Summer		
S16.000	PP_51	120 Winter	1	+0%	30/15 Summer		
S16.001	ORI_51	120 Winter	1	+0%	30/15 Summer		
S14.002	S9	15 Winter	1	+0%	30/360 Winter		
S17.000	PP_13-14	1440 Winter	1	+0%	100/60 Winter		
S17.001	ORI_13-14	960 Summer	1	+0%	100/60 Winter		
S18.000	PP_15	360 Winter	1	+0%	30/15 Summer		
S18.001	ORI_15	360 Winter	1	+0%	1/240 Winter		
S1.006	S10	30 Winter	1	+0%	30/60 Winter		
S19.000	S11a	240 Winter	1	+0%	30/60 Winter		
S20.000	PP_18	60 Winter	1	+0%	30/15 Summer		
S20.001	ORI_18	60 Winter	1	+0%	30/15 Summer		
S21.000	PP_19-53	480 Winter	1	+0%	30/60 Summer		
S21.001	ORI_19-53	480 Winter	1	+0%	30/30 Winter		
S1.007	S11	30 Winter	1	+0%	30/30 Winter		
S22.000	PP_20-21	240 Winter	1	+0%	30/15 Winter		
S22.001	ORI_20-21	240 Winter	1	+0%	30/15 Summer		
S22.002	S12	15 Winter	1	+0%	30/60 Winter		
S1.008	S13	30 Winter	1	+0%	30/15 Summer		
S23.000	PP_22-23	960 Winter	1	+0%	30/15 Winter		
S23.001	ORI_22-23	960 Winter	1	+0%	1/960 Winter		
S24.000	PP_24	480 Winter	1	+0%	30/15 Summer		
S24.001	ORI_24	480 Winter	1	+0%	30/15 Summer		
S23.002	S15	480 Winter	1	+0%	100/480 Winter		
S25.000	PP_25-26	960 Winter	1	+0%	30/15 Winter		
S25.001	ORI_25-26	960 Winter	1	+0%	30/15 Summer		
©1982-2018 Innovyze							

Odyssey Markides								Page 41	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S1.004	S6	4.898	-0.347	0.000	0.11		17.1	OK	
S6.000	PP_76	6.566	-0.034	0.000	0.02		0.1	OK	
S6.001	ORI_76	6.566	-0.024	0.000	0.00		0.1	OK	
S7.000	PP_80	6.726	-0.024	0.000	0.02		0.1	OK	
S7.001	ORI_80	6.726	-0.014	0.000	0.00		0.1	OK	
S8.000	PP_79	6.428	-0.022	0.000	0.04		0.1	OK	
S8.001	ORI_79	6.427	-0.013	0.000	0.01		0.1	OK	
S9.000	PP_75	6.687	-0.013	0.000	0.02		0.1	OK	
S9.001	ORI_75	6.687	-0.003	0.000	0.01		0.1	OK	
S6.002	S7	6.186	-0.126	0.000	0.06		2.7	OK	
S10.000	PP_5-6	6.541	-0.059	0.000	0.03		0.3	OK	
S10.001	ORI_5-6	6.541	-0.049	0.000	0.00		0.3	OK	
S11.000	PP_7-8	6.602	0.002	0.000	0.02		0.1	SURCHARGED	
S11.001	ORI_7-8	6.602	0.012	0.000	0.00		0.1	SURCHARGED	
S12.000	PP_9-10	6.490	-0.010	0.000	0.02		0.1	OK	
S12.001	ORI_9-10	6.489	-0.001	0.000	0.00		0.1	OK	
S13.000	PP_11-12	6.321	-0.029	0.000	0.02		0.1	OK	
S13.001	ORI_11-12	6.321	-0.019	0.000	0.00		0.1	OK	
S1.005	S8	4.767	-0.336	0.000	0.14		21.3	OK	
S14.000	PP_54	6.334	-0.016	0.000	0.02		0.1	OK	
S14.001	ORI_54	6.334	-0.006	0.000	0.00		0.1	OK	
S15.000	PP_55	6.312	-0.038	0.000	0.04		0.1	OK	
S15.001	ORI_55	6.312	-0.028	0.000	0.01		0.1	OK	
S16.000	PP_51	6.427	-0.073	0.000	0.04		0.4	OK	
S16.001	ORI_51	6.426	-0.064	0.000	0.01		0.4	OK	
S14.002	S9	4.991	-0.111	0.000	0.15		2.5	OK	
S17.000	PP_13-14	6.227	-0.173	0.000	0.00		0.0	OK	
S17.001	ORI_13-14	6.241	-0.149	0.000	0.00		0.0	OK	
S18.000	PP_15	5.946	-0.004	0.000	0.05		0.2	OK	
S18.001	ORI_15	5.946	0.006	0.000	0.01		0.1	SURCHARGED	
S1.006	S10	4.666	-0.261	0.000	0.14		20.2	OK	
S19.000	S11a	4.606	-0.294	0.000	0.02		2.9	OK	
S20.000	PP_18	5.876	-0.074	0.000	0.06		0.5	OK	
S20.001	ORI_18	5.875	-0.065	0.000	0.01		0.5	OK	
S21.000	PP_19-53	6.065	-0.035	0.000	0.02		0.1	OK	
S21.001	ORI_19-53	6.065	-0.025	0.000	0.00		0.1	OK	
S1.007	S11	4.647	-0.202	0.000	0.05		6.4	OK	
S22.000	PP_20-21	6.388	-0.062	0.000	0.03		0.3	OK	
S22.001	ORI_20-21	6.388	-0.052	0.000	0.00		0.2	OK	
S22.002	S12	4.693	-0.179	0.000	0.09		3.1	OK	
S1.008	S13	4.645	-0.145	0.000	0.05		5.6	OK	
S23.000	PP_22-23	6.542	-0.008	0.000	0.02		0.1	OK	
S23.001	ORI_22-23	6.541	0.001	0.000	0.01		0.1	SURCHARGED	
S24.000	PP_24	6.530	-0.020	0.000	0.02		0.1	OK	
S24.001	ORI_24	6.530	-0.010	0.000	0.01		0.1	OK	
S23.002	S15	6.072	-0.221	0.000	0.00		0.1	OK	
S25.000	PP_25-26	6.440	-0.010	0.000	0.02		0.1	OK	
©1982-2018 Innovyze									

Odyssey Markides							Page 42		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S25.001	ORI_25-26	6.439	-0.001	0.000	0.01		0.1	OK	
©1982-2018 Innovyze									

Odyssey Markides						Page 43	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow
S26.000	PP_27	480 Winter	1	+0%	30/15 Summer		
S26.001	ORI_27	480 Winter	1	+0%	1/360 Winter		
S27.000	PP_28	1440 Winter	1	+0%	30/240 Winter		
S27.001	ORI_28	1440 Winter	1	+0%	30/240 Winter		
S23.003	S16	15 Winter	1	+0%	100/360 Winter		
S28.000	PP_29	120 Winter	1	+0%	30/15 Summer		
S28.001	ORI_29	120 Winter	1	+0%	30/15 Summer		
S23.004	S18	15 Winter	1	+0%	100/240 Winter		
S23.005	S19	15 Winter	1	+0%	100/240 Summer		
S29.000	PP_30	480 Winter	1	+0%	30/60 Winter		
S29.001	ORI_30	480 Winter	1	+0%	30/60 Winter		
S23.006	S20	15 Winter	1	+0%	100/120 Winter		
S30.000	PP_31	120 Winter	1	+0%	30/15 Summer		
S30.001	ORI_31	120 Winter	1	+0%	30/15 Summer		
S31.000	PP_32	480 Winter	1	+0%	30/60 Summer		
S31.001	ORI_32	480 Winter	1	+0%	30/30 Winter		
S32.000	PP_33	480 Winter	1	+0%	30/15 Winter		
S32.001	ORI_33	480 Winter	1	+0%	30/15 Summer		
S33.000	PP_34-35	360 Winter	1	+0%	30/15 Summer		
S33.001	ORI_34-35	360 Winter	1	+0%	30/15 Summer		
S34.000	PP_36	120 Winter	1	+0%	1/15 Summer		
S34.001	ORI_36	120 Winter	1	+0%	1/15 Summer		
S23.007	S21	15 Winter	1	+0%	100/15 Winter		
S35.000	S23a	360 Winter	1	+0%	100/120 Summer		
S23.008	S23	30 Winter	1	+0%	100/15 Summer		
S23.009	S24	30 Winter	1	+0%	100/15 Summer		
S36.000	PP_81-82	360 Winter	1	+0%	30/15 Summer		
S36.001	ORI_81-82	360 Winter	1	+0%	30/15 Summer		
S37.000	PP_83	360 Winter	1	+0%	30/15 Summer		
S37.001	ORI_83	360 Winter	1	+0%	1/240 Winter		
S38.000	PP_84-85	960 Winter	1	+0%	30/30 Summer		
S38.001	ORI_84-85	960 Winter	1	+0%	30/15 Winter		
S36.002	S29	15 Winter	1	+0%	30/15 Summer	100/15 Summer	
S39.000	PP_88	120 Winter	1	+0%	30/15 Summer		
S39.001	ORI_88	120 Winter	1	+0%	30/15 Summer		
S40.000	PP_86-87	240 Winter	1	+0%	30/15 Winter		
S40.001	ORI_86-87	240 Winter	1	+0%	30/15 Winter		
S41.000	PP_49-50	960 Winter	1	+0%	30/30 Winter		
S41.001	ORI_49-50	960 Winter	1	+0%	30/30 Winter		
S42.000	PP_48	240 Winter	1	+0%	30/15 Summer		
S42.001	ORI_48	240 Winter	1	+0%	30/15 Summer		
S43.000	PP_56-78	1440 Winter	1	+0%	1/240 Summer		
S43.001	ORI_56-78	1440 Winter	1	+0%	1/120 Winter		
S41.002	S25	15 Winter	1	+0%	100/15 Summer		
S44.000	PP_46-47	240 Winter	1	+0%	30/15 Winter		
S44.001	ORI_46-47	240 Winter	1	+0%	30/15 Winter		
S41.003	S26	15 Winter	1	+0%	100/15 Summer		
S45.000	PP_41-45	1440 Winter	1	+0%	1/480 Winter		
©1982-2018 Innovyze							

Odyssey Markides								Page 44	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S26.000	PP_27		6.347	-0.003	0.000	0.02		0.1	OK
S26.001	ORI_27		6.346	0.006	0.000	0.01		0.1	SURCHARGED
S27.000	PP_28		6.261	-0.089	0.000	0.01		0.0	OK
S27.001	ORI_28		6.258	-0.082	0.000	0.00		0.0	OK
S23.003	S16		5.943	-0.178	0.000	0.10		3.7	OK
S28.000	PP_29		6.068	-0.032	0.000	0.07		0.2	OK
S28.001	ORI_29		6.067	-0.023	0.000	0.02		0.2	OK
S23.004	S18		5.558	-0.248	0.000	0.07		3.9	OK
S23.005	S19		5.521	-0.247	0.000	0.07		3.9	OK
S29.000	PP_30		5.896	-0.054	0.000	0.01		0.0	OK
S29.001	ORI_30		5.895	-0.045	0.000	0.00		0.0	OK
S23.006	S20		5.489	-0.233	0.000	0.11		6.3	OK
S30.000	PP_31		5.828	-0.022	0.000	0.07		0.2	OK
S30.001	ORI_31		5.827	-0.013	0.000	0.03		0.2	OK
S31.000	PP_32		6.103	-0.047	0.000	0.02		0.1	OK
S31.001	ORI_32		6.102	-0.038	0.000	0.00		0.1	OK
S32.000	PP_33		6.176	-0.024	0.000	0.02		0.1	OK
S32.001	ORI_33		6.176	-0.014	0.000	0.00		0.1	OK
S33.000	PP_34-35		6.088	-0.012	0.000	0.04		0.1	OK
S33.001	ORI_34-35		6.087	-0.003	0.000	0.01		0.1	OK
S34.000	PP_36		6.021	0.071	0.000	0.10		0.3	SURCHARGED
S34.001	ORI_36		6.020	0.080	0.000	0.02		0.2	SURCHARGED
S23.007	S21		5.298	-0.380	0.000	0.06		8.4	OK
S35.000	S23a		5.142	-0.388	0.000	0.01		1.2	OK
S23.008	S23		5.227	-0.272	0.000	0.04		4.1	OK
S23.009	S24		5.230	-0.245	0.000	0.03		3.2	OK
S36.000	PP_81-82		6.778	-0.022	0.000	0.04		0.1	OK
S36.001	ORI_81-82		6.777	-0.013	0.000	0.01		0.1	OK
S37.000	PP_83		6.594	-0.006	0.000	0.02		0.1	OK
S37.001	ORI_83		6.594	0.004	0.000	0.01		0.1	SURCHARGED
S38.000	PP_84-85		6.579	-0.021	0.000	0.02		0.1	OK
S38.001	ORI_84-85		6.579	-0.011	0.000	0.00		0.1	OK
S36.002	S29		6.245	-0.095	0.000	0.29		5.6	OK
S39.000	PP_88		5.870	-0.030	0.000	0.07		0.2	OK
S39.001	ORI_88		5.869	-0.021	0.000	0.02		0.2	OK
S40.000	PP_86-87		6.234	-0.066	0.000	0.03		0.2	OK
S40.001	ORI_86-87		6.233	-0.057	0.000	0.01		0.2	OK
S41.000	PP_49-50		6.458	-0.042	0.000	0.01		0.1	OK
S41.001	ORI_49-50		6.458	-0.032	0.000	0.00		0.1	OK
S42.000	PP_48		6.273	-0.027	0.000	0.04		0.1	OK
S42.001	ORI_48		6.272	-0.018	0.000	0.01		0.1	OK
S43.000	PP_56-78		6.344	0.044	0.000	0.05		0.2	SURCHARGED
S43.001	ORI_56-78		6.343	0.053	0.000	0.02		0.2	SURCHARGED
S41.002	S25		5.919	-0.171	0.000	0.13		4.8	OK
S44.000	PP_46-47		6.034	-0.066	0.000	0.03		0.2	OK
S44.001	ORI_46-47		6.033	-0.057	0.000	0.01		0.2	OK
S41.003	S26		5.750	-0.156	0.000	0.21		6.2	OK
©1982-2018 Innovyze									

Odyssey Markides							Page 45			
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH						
XP Solutions				Network 2018.1						
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>										
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	
S45.000	PP_41-45		6.416	0.016	0.000	0.02		0.1	SURCHARGED	
							</			

Odyssey Markides		Page 46																											
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																												
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																												
XP Solutions Network 2018.1																													
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>																													
	<table><tr><td></td><td>US/MH</td><td>Level</td></tr><tr><td>PN</td><td>Name</td><td>Exceeded</td></tr><tr><td>S43.000</td><td>PP_56-78</td><td></td></tr><tr><td>S43.001</td><td>ORI_56-78</td><td></td></tr><tr><td>S41.002</td><td>S25</td><td></td></tr><tr><td>S44.000</td><td>PP_46-47</td><td></td></tr><tr><td>S44.001</td><td>ORI_46-47</td><td></td></tr><tr><td>S41.003</td><td>S26</td><td></td></tr><tr><td>S45.000</td><td>PP_41-45</td><td></td></tr></table>		US/MH	Level	PN	Name	Exceeded	S43.000	PP_56-78		S43.001	ORI_56-78		S41.002	S25		S44.000	PP_46-47		S44.001	ORI_46-47		S41.003	S26		S45.000	PP_41-45		
	US/MH	Level																											
PN	Name	Exceeded																											
S43.000	PP_56-78																												
S43.001	ORI_56-78																												
S41.002	S25																												
S44.000	PP_46-47																												
S44.001	ORI_46-47																												
S41.003	S26																												
S45.000	PP_41-45																												
©1982-2018 Innovyze																													

Odyssey Markides					Page 47		
Tuscany House White Hart Lane Basingstoke RG21 4AF			Burndell Road, Yapton				
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX			Designed by SG Checked by LH				
XP Solutions			Network 2018.1				
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow
S45.001	ORI_41-45	1440 Winter	1	+0%	1/360 Winter		
S41.004	S27	15 Winter	1	+0%	100/15 Summer		
S46.000	PP_37-38	480 Winter	1	+0%	30/30 Winter		
S46.001	ORI_37-38	480 Winter	1	+0%	30/30 Summer		
S47.000	PP_39-40	360 Winter	1	+0%	30/30 Winter		
S47.001	ORI_39-40	360 Winter	1	+0%	30/30 Winter		
S41.005	S28	15 Winter	1	+0%	100/15 Summer		
S36.003	S30	30 Winter	1	+0%	30/15 Summer		
S48.000	PP_105	30 Winter	1	+0%	30/15 Summer		
S48.001	ORI_105	30 Winter	1	+0%	30/15 Summer		
S49.000	PP_106	360 Winter	1	+0%	30/30 Winter		
S49.001	ORI_106	360 Winter	1	+0%	30/30 Summer		
S50.000	PP_107	360 Winter	1	+0%	30/15 Summer		
S50.001	ORI_107	360 Winter	1	+0%	30/15 Summer		
S48.002	S31	15 Winter	1	+0%	100/15 Summer		
S51.000	PP_102	60 Winter	1	+0%	30/15 Summer		
S51.001	ORI_102	60 Winter	1	+0%	30/15 Summer		
S52.000	PP_100-101	360 Winter	1	+0%	30/15 Summer		
S52.001	ORI_100-101	360 Winter	1	+0%	30/15 Summer		
S53.000	PP_103-104	960 Winter	1	+0%	30/30 Winter		
S53.001	ORI_103-104	960 Winter	1	+0%	30/30 Summer		
S48.003	S32	15 Winter	1	+0%	100/15 Summer		
S48.004	S33	15 Winter	1	+0%	100/15 Summer		
S48.005	S34	15 Winter	1	+0%	100/15 Summer		
S54.000	PP_99	360 Winter	1	+0%	30/15 Summer		
S54.001	ORI_99	360 Winter	1	+0%	30/15 Summer		
S48.006	S35	15 Winter	1	+0%	100/15 Summer		
S55.000	PP_89	480 Winter	1	+0%	30/30 Winter		
S55.001	ORI_89	480 Winter	1	+0%	30/15 Winter		
S56.000	PP_91	480 Winter	1	+0%	30/15 Summer		
S56.001	ORI_91	480 Winter	1	+0%	1/240 Winter		
S48.007	S36	30 Winter	1	+0%	100/15 Summer		
S48.008	S37	30 Winter	1	+0%	100/15 Summer		
S36.004	S38	30 Winter	1	+0%	30/15 Winter		
S57.000	PP_92	240 Winter	1	+0%	30/15 Summer		
S57.001	ORI_92	240 Winter	1	+0%	30/15 Summer		
S36.005	S39	30 Winter	1	+0%	30/15 Winter		
S58.000	S40a	360 Winter	1	+0%	100/30 Winter		
S23.010	S40	30 Winter	1	+0%	30/15 Winter		
S59.000	POND	30 Winter	1	+0%	100/60 Winter		
S59.001	S41	120 Winter	1	+0%	1/15 Summer		
S60.000	PP_90-98	960 Winter	1	+0%	30/30 Winter		
S60.001	ORI_90-98	960 Winter	1	+0%	30/30 Winter		
S23.011	S42	30 Winter	1	+0%	30/15 Summer	100/240 Winter	
©1982-2018 Innovyze							

Odyssey Markides							Page 48		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S45.001	ORI_41-45		6.416	0.026	0.000	0.00		0.1	SURCHARGED
S41.004	S27		5.705	-0.156	0.000	0.21		6.2	OK
S46.000	PP_37-38		6.340	-0.060	0.000	0.02		0.1	OK
S46.001	ORI_37-38		6.340	-0.050	0.000	0.00		0.1	OK
S47.000	PP_39-40		6.281	-0.069	0.000	0.02		0.1	OK
S47.001	ORI_39-40		6.280	-0.060	0.000	0.00		0.1	OK
S41.005	S28		5.590	-0.226	0.000	0.14		9.3	OK
S36.003	S30		5.263	-0.308	0.000	0.11		15.9	OK
S48.000	PP_105		6.221	-0.079	0.000	0.14		1.2	OK
S48.001	ORI_105		6.219	-0.071	0.000	0.04		1.2	OK
S49.000	PP_106		6.254	-0.046	0.000	0.02		0.1	OK
S49.001	ORI_106		6.254	-0.036	0.000	0.00		0.1	OK
S50.000	PP_107		6.329	-0.021	0.000	0.04		0.1	OK
S50.001	ORI_107		6.328	-0.012	0.000	0.01		0.1	OK
S48.002	S31		5.766	-0.260	0.000	0.04		2.7	OK
S51.000	PP_102		5.967	-0.033	0.000	0.11		0.4	OK
S51.001	ORI_102		5.965	-0.025	0.000	0.04		0.3	OK
S52.000	PP_100-101		5.981	-0.019	0.000	0.04		0.1	OK
S52.001	ORI_100-101		5.981	-0.009	0.000	0.02		0.1	OK
S53.000	PP_103-104		6.025	-0.025	0.000	0.02		0.1	OK
S53.001	ORI_103-104		6.025	-0.015	0.000	0.01		0.1	OK
S48.003	S32		5.603	-0.233	0.000	0.11		7.2	OK
S48.004	S33		5.491	-0.230	0.000	0.12		7.2	OK
S48.005	S34		5.445	-0.225	0.000	0.14		8.2	OK
S54.000	PP_99		6.280	-0.020	0.000	0.02		0.1	OK
S54.001	ORI_99		6.279	-0.011	0.000	0.00		0.1	OK
S48.006	S35		5.391	-0.225	0.000	0.14		8.3	OK
S55.000	PP_89		6.059	-0.041	0.000	0.02		0.1	OK
S55.001	ORI_89		6.059	-0.031	0.000	0.00		0.1	OK
S56.000	PP_91		5.897	-0.003	0.000	0.02		0.1	OK
S56.001	ORI_91		5.897	0.007	0.000	0.00		0.1	SURCHARGED
S48.007	S36		5.254	-0.314	0.000	0.07		9.0	OK
S48.008	S37		5.248	-0.273	0.000	0.09		8.1	OK
S36.004	S38		5.247	-0.254	0.000	0.22		22.3	OK
S57.000	PP_92		5.864	-0.036	0.000	0.04		0.1	OK
S57.001	ORI_92		5.863	-0.027	0.000	0.01		0.1	OK
S36.005	S39		5.238	-0.235	0.000	0.24		23.6	OK
S58.000	S40a		5.157	-0.343	0.000	0.01		1.4	OK
S23.010	S40		5.231	-0.219	0.000	0.08		11.1	OK
S59.000	POND		6.212	-0.088	0.000	0.03		0.4	OK
S59.001	S41		6.038	0.188	0.000	0.01		0.1	SURCHARGED
S60.000	PP_90-98		6.117	-0.033	0.000	0.02		0.2	OK
S60.001	ORI_90-98		6.117	-0.023	0.000	0.00		0.2	OK
S23.011	S42		5.229	-0.140	0.000	0.07		6.6	OK
©1982-2018 Innovyze									

Odyssey Markides		Page 49																																																																																																																																							
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																																																																																																																																								
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																																																																																																																																								
XP Solutions	Network 2018.1																																																																																																																																								
<u>1 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>																																																																																																																																									
	<table><tr><th>PN</th><th>US/MH Name</th><th>Level Exceeded</th></tr><tr><td>S45.001</td><td>ORI_41-45</td><td></td></tr><tr><td>S41.004</td><td>S27</td><td></td></tr><tr><td>S46.000</td><td>PP_37-38</td><td></td></tr><tr><td>S46.001</td><td>ORI_37-38</td><td></td></tr><tr><td>S47.000</td><td>PP_39-40</td><td></td></tr><tr><td>S47.001</td><td>ORI_39-40</td><td></td></tr><tr><td>S41.005</td><td>S28</td><td></td></tr><tr><td>S36.003</td><td>S30</td><td></td></tr><tr><td>S48.000</td><td>PP_105</td><td></td></tr><tr><td>S48.001</td><td>ORI_105</td><td></td></tr><tr><td>S49.000</td><td>PP_106</td><td></td></tr><tr><td>S49.001</td><td>ORI_106</td><td></td></tr><tr><td>S50.000</td><td>PP_107</td><td></td></tr><tr><td>S50.001</td><td>ORI_107</td><td></td></tr><tr><td>S48.002</td><td>S31</td><td></td></tr><tr><td>S51.000</td><td>PP_102</td><td></td></tr><tr><td>S51.001</td><td>ORI_102</td><td></td></tr><tr><td>S52.000</td><td>PP_100-101</td><td></td></tr><tr><td>S52.001</td><td>ORI_100-101</td><td></td></tr><tr><td>S53.000</td><td>PP_103-104</td><td></td></tr><tr><td>S53.001</td><td>ORI_103-104</td><td></td></tr><tr><td>S48.003</td><td>S32</td><td></td></tr><tr><td>S48.004</td><td>S33</td><td></td></tr><tr><td>S48.005</td><td>S34</td><td></td></tr><tr><td>S54.000</td><td>PP_99</td><td></td></tr><tr><td>S54.001</td><td>ORI_99</td><td></td></tr><tr><td>S48.006</td><td>S35</td><td></td></tr><tr><td>S55.000</td><td>PP_89</td><td></td></tr><tr><td>S55.001</td><td>ORI_89</td><td></td></tr><tr><td>S56.000</td><td>PP_91</td><td></td></tr><tr><td>S56.001</td><td>ORI_91</td><td></td></tr><tr><td>S48.007</td><td>S36</td><td></td></tr><tr><td>S48.008</td><td>S37</td><td></td></tr><tr><td>S36.004</td><td>S38</td><td></td></tr><tr><td>S57.000</td><td>PP_92</td><td></td></tr><tr><td>S57.001</td><td>ORI_92</td><td></td></tr><tr><td>S36.005</td><td>S39</td><td></td></tr><tr><td>S58.000</td><td>S40a</td><td></td></tr><tr><td>S23.010</td><td>S40</td><td></td></tr><tr><td>S59.000</td><td>POND</td><td></td></tr><tr><td>S59.001</td><td>S41</td><td></td></tr><tr><td>S60.000</td><td>PP_90-98</td><td></td></tr><tr><td>S60.001</td><td>ORI_90-98</td><td></td></tr><tr><td>S23.011</td><td>S42</td><td>8</td></tr></table>	PN	US/MH Name	Level Exceeded	S45.001	ORI_41-45		S41.004	S27		S46.000	PP_37-38		S46.001	ORI_37-38		S47.000	PP_39-40		S47.001	ORI_39-40		S41.005	S28		S36.003	S30		S48.000	PP_105		S48.001	ORI_105		S49.000	PP_106		S49.001	ORI_106		S50.000	PP_107		S50.001	ORI_107		S48.002	S31		S51.000	PP_102		S51.001	ORI_102		S52.000	PP_100-101		S52.001	ORI_100-101		S53.000	PP_103-104		S53.001	ORI_103-104		S48.003	S32		S48.004	S33		S48.005	S34		S54.000	PP_99		S54.001	ORI_99		S48.006	S35		S55.000	PP_89		S55.001	ORI_89		S56.000	PP_91		S56.001	ORI_91		S48.007	S36		S48.008	S37		S36.004	S38		S57.000	PP_92		S57.001	ORI_92		S36.005	S39		S58.000	S40a		S23.010	S40		S59.000	POND		S59.001	S41		S60.000	PP_90-98		S60.001	ORI_90-98		S23.011	S42	8	
PN	US/MH Name	Level Exceeded																																																																																																																																							
S45.001	ORI_41-45																																																																																																																																								
S41.004	S27																																																																																																																																								
S46.000	PP_37-38																																																																																																																																								
S46.001	ORI_37-38																																																																																																																																								
S47.000	PP_39-40																																																																																																																																								
S47.001	ORI_39-40																																																																																																																																								
S41.005	S28																																																																																																																																								
S36.003	S30																																																																																																																																								
S48.000	PP_105																																																																																																																																								
S48.001	ORI_105																																																																																																																																								
S49.000	PP_106																																																																																																																																								
S49.001	ORI_106																																																																																																																																								
S50.000	PP_107																																																																																																																																								
S50.001	ORI_107																																																																																																																																								
S48.002	S31																																																																																																																																								
S51.000	PP_102																																																																																																																																								
S51.001	ORI_102																																																																																																																																								
S52.000	PP_100-101																																																																																																																																								
S52.001	ORI_100-101																																																																																																																																								
S53.000	PP_103-104																																																																																																																																								
S53.001	ORI_103-104																																																																																																																																								
S48.003	S32																																																																																																																																								
S48.004	S33																																																																																																																																								
S48.005	S34																																																																																																																																								
S54.000	PP_99																																																																																																																																								
S54.001	ORI_99																																																																																																																																								
S48.006	S35																																																																																																																																								
S55.000	PP_89																																																																																																																																								
S55.001	ORI_89																																																																																																																																								
S56.000	PP_91																																																																																																																																								
S56.001	ORI_91																																																																																																																																								
S48.007	S36																																																																																																																																								
S48.008	S37																																																																																																																																								
S36.004	S38																																																																																																																																								
S57.000	PP_92																																																																																																																																								
S57.001	ORI_92																																																																																																																																								
S36.005	S39																																																																																																																																								
S58.000	S40a																																																																																																																																								
S23.010	S40																																																																																																																																								
S59.000	POND																																																																																																																																								
S59.001	S41																																																																																																																																								
S60.000	PP_90-98																																																																																																																																								
S60.001	ORI_90-98																																																																																																																																								
S23.011	S42	8																																																																																																																																							
©1982-2018 Innovyze																																																																																																																																									

Odyssey Markides		Page 50
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)
for SW Network

Simulation Criteria

Areal Reduction Factor	1.000	Additional Flow - % of Total Flow	0.000
Hot Start (mins)	0	MADD Factor * 10m ³ /ha Storage	2.000
Hot Start Level (mm)	0	Inlet Coefficient	0.800
Manhole Headloss Coeff (Global)	0.500	Flow per Person per Day (l/per/day)	0.000
Foul Sewage per hectare (l/s)	0.000		

Number of Input Hydrographs	0	Number of Storage Structures	58
Number of Online Controls	57	Number of Time/Area Diagrams	0
Number of Offline Controls	0	Number of Real Time Controls	0

Synthetic Rainfall Details

Rainfall Model	FEH
FEH Rainfall Version	1999
Site Location	GB 498650 101750 SU 98650 01750
C (1km)	-0.025
D1 (1km)	0.390
D2 (1km)	0.245
D3 (1km)	0.403
E (1km)	0.310
F (1km)	2.321
Cv (Summer)	0.750
Cv (Winter)	0.840

Margin for Flood Risk Warning (mm)	300.0
Analysis Timestep	2.5 Second Increment (Extended)
DTS Status	OFF
DVD Status	ON
Inertia Status	ON

Profile(s)	Summer and Winter
Duration(s) (mins)	15, 30, 60, 120, 240, 360, 480, 960, 1440
Return Period(s) (years)	1, 30, 100
Climate Change (%)	0, 0, 40

PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow	Overflow Act.
S1.000	S1	15 Winter	30	+0%	100/240 Summer			
S1.001	S2	15 Winter	30	+0%	100/15 Summer			
S1.002	S3	15 Winter	30	+0%	100/15 Summer			
S1.003	S4	360 Winter	30	+0%	100/15 Summer			
S2.000	S5	15 Winter	30	+0%	100/120 Winter			
S3.000	PP_3-4	480 Winter	30	+0%	1/480 Winter			
S3.001	ORI_3-4	480 Winter	30	+0%	1/360 Winter			
S4.000	PP_1-2	480 Winter	30	+0%	30/30 Summer			
S4.001	ORI_1-2	480 Winter	30	+0%	30/15 Winter			
S5.000	PP_108	120 Winter	30	+0%	30/15 Summer			
S5.001	ORI_108	120 Winter	30	+0%	30/15 Summer			

©1982-2018 Innovyze

Odyssey Markides							Page 51		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S1.000	S1	5.702	-0.168	0.000	0.15		5.4	OK	
S1.001	S2	5.622	-0.109	0.000	0.51		19.2	OK	
S1.002	S3	5.379	-0.141	0.000	0.52		35.5	OK	
S1.003	S4	5.111	-0.166	0.000	0.05		5.1	OK	
S2.000	S5	5.608	-0.175	0.000	0.11		11.4	OK	
S3.000	PP_3-4	6.524	0.174	0.000	0.04		0.1	SURCHARGED	
S3.001	ORI_3-4	6.524	0.184	0.000	0.01		0.1	SURCHARGED	
S4.000	PP_1-2	6.281	0.131	0.000	0.03		0.3	SURCHARGED	
S4.001	ORI_1-2	6.280	0.140	0.000	0.01		0.2	SURCHARGED	
S5.000	PP_108	6.573	0.123	0.000	0.09		0.3	SURCHARGED	
S5.001	ORI_108	6.572	0.132	0.000	0.01		0.2	SURCHARGED	
©1982-2018 Innovyze									

Odyssey Markides						Page 52	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow Overflow Act.
S1.004	S6	360 Winter	30	+0%	100/15 Summer		
S6.000	PP_76	480 Winter	30	+0%	30/30 Summer		
S6.001	ORI_76	480 Winter	30	+0%	30/15 Winter		
S7.000	PP_80	480 Winter	30	+0%	30/15 Winter		
S7.001	ORI_80	480 Winter	30	+0%	30/15 Summer		
S8.000	PP_79	240 Winter	30	+0%	30/15 Summer		
S8.001	ORI_79	240 Winter	30	+0%	30/15 Summer		
S9.000	PP_75	480 Winter	30	+0%	30/15 Summer		
S9.001	ORI_75	480 Winter	30	+0%	30/15 Summer		
S6.002	S7	15 Winter	30	+0%	100/360 Winter		
S10.000	PP_5-6	240 Winter	30	+0%	30/15 Winter		
S10.001	ORI_5-6	240 Winter	30	+0%	30/15 Summer		
S11.000	PP_7-8	480 Winter	30	+0%	1/480 Winter		
S11.001	ORI_7-8	480 Winter	30	+0%	1/360 Winter		
S12.000	PP_9-10	480 Winter	30	+0%	30/15 Winter		
S12.001	ORI_9-10	480 Winter	30	+0%	30/15 Summer		
S13.000	PP_11-12	480 Winter	30	+0%	30/30 Winter		
S13.001	ORI_11-12	480 Winter	30	+0%	30/30 Summer		
S1.005	S8	360 Winter	30	+0%	30/360 Winter		
S14.000	PP_54	480 Winter	30	+0%	30/15 Summer		
S14.001	ORI_54	480 Winter	30	+0%	30/15 Summer		
S15.000	PP_55	240 Winter	30	+0%	30/15 Summer		
S15.001	ORI_55	240 Winter	30	+0%	30/15 Summer		
S16.000	PP_51	120 Winter	30	+0%	30/15 Summer		
S16.001	ORI_51	120 Winter	30	+0%	30/15 Summer		
S14.002	S9	360 Winter	30	+0%	30/360 Winter		
S17.000	PP_13-14	1440 Winter	30	+0%	100/60 Winter		
S17.001	ORI_13-14	1440 Winter	30	+0%	100/60 Winter		
S18.000	PP_15	360 Winter	30	+0%	30/15 Summer		
S18.001	ORI_15	360 Winter	30	+0%	1/240 Winter		
S1.006	S10	360 Winter	30	+0%	30/60 Winter		
S19.000	S11a	360 Winter	30	+0%	30/60 Winter		
S20.000	PP_18	60 Winter	30	+0%	30/15 Summer		
S20.001	ORI_18	60 Winter	30	+0%	30/15 Summer		
S21.000	PP_19-53	480 Winter	30	+0%	30/60 Summer		
S21.001	ORI_19-53	480 Winter	30	+0%	30/30 Winter		
S1.007	S11	360 Winter	30	+0%	30/30 Winter		
S22.000	PP_20-21	240 Winter	30	+0%	30/15 Winter		
S22.001	ORI_20-21	240 Winter	30	+0%	30/15 Summer		
S22.002	S12	360 Winter	30	+0%	30/60 Winter		
S1.008	S13	360 Winter	30	+0%	30/15 Summer		
S23.000	PP_22-23	480 Winter	30	+0%	30/15 Winter		
S23.001	ORI_22-23	480 Winter	30	+0%	1/960 Winter		
S24.000	PP_24	480 Winter	30	+0%	30/15 Summer		
S24.001	ORI_24	480 Winter	30	+0%	30/15 Summer		
S23.002	S15	480 Winter	30	+0%	100/480 Winter		
S25.000	PP_25-26	480 Winter	30	+0%	30/15 Winter		
S25.001	ORI_25-26	480 Winter	30	+0%	30/15 Summer		
©1982-2018 Innovyze							

Odyssey Markides							Page 53		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S1.004	S6	5.111	-0.134	0.000	0.07		10.0	OK	
S6.000	PP_76	6.689	0.089	0.000	0.03		0.1	SURCHARGED	
S6.001	ORI_76	6.688	0.098	0.000	0.01		0.1	SURCHARGED	
S7.000	PP_80	6.861	0.111	0.000	0.03		0.1	SURCHARGED	
S7.001	ORI_80	6.861	0.121	0.000	0.01		0.1	SURCHARGED	
S8.000	PP_79	6.588	0.138	0.000	0.08		0.3	SURCHARGED	
S8.001	ORI_79	6.586	0.146	0.000	0.02		0.2	SURCHARGED	
S9.000	PP_75	6.853	0.153	0.000	0.04		0.1	SURCHARGED	
S9.001	ORI_75	6.852	0.162	0.000	0.01		0.1	SURCHARGED	
S6.002	S7	6.213	-0.099	0.000	0.25		10.7	OK	
S10.000	PP_5-6	6.724	0.124	0.000	0.05		0.5	SURCHARGED	
S10.001	ORI_5-6	6.723	0.133	0.000	0.01		0.4	SURCHARGED	
S11.000	PP_7-8	6.774	0.174	0.000	0.04		0.1	SURCHARGED	
S11.001	ORI_7-8	6.774	0.184	0.000	0.00		0.1	SURCHARGED	
S12.000	PP_9-10	6.642	0.142	0.000	0.03		0.1	SURCHARGED	
S12.001	ORI_9-10	6.641	0.151	0.000	0.00		0.1	SURCHARGED	
S13.000	PP_11-12	6.444	0.094	0.000	0.03		0.1	SURCHARGED	
S13.001	ORI_11-12	6.444	0.104	0.000	0.00		0.1	SURCHARGED	
S1.005	S8	5.113	0.010	0.000	0.09		13.0	SURCHARGED	
S14.000	PP_54	6.488	0.138	0.000	0.03		0.1	SURCHARGED	
S14.001	ORI_54	6.488	0.148	0.000	0.00		0.1	SURCHARGED	
S15.000	PP_55	6.452	0.102	0.000	0.07		0.2	SURCHARGED	
S15.001	ORI_55	6.451	0.111	0.000	0.01		0.2	SURCHARGED	
S16.000	PP_51	6.604	0.104	0.000	0.08		0.7	SURCHARGED	
S16.001	ORI_51	6.603	0.113	0.000	0.01		0.7	SURCHARGED	
S14.002	S9	5.116	0.014	0.000	0.12		2.0	SURCHARGED	
S17.000	PP_13-14	6.382	-0.018	0.000	0.01		0.1	OK	
S17.001	ORI_13-14	6.382	-0.008	0.000	0.00		0.1	OK	
S18.000	PP_15	6.140	0.190	0.000	0.08		0.3	SURCHARGED	
S18.001	ORI_15	6.139	0.199	0.000	0.01		0.3	SURCHARGED	
S1.006	S10	5.126	0.199	0.000	0.10		14.1	SURCHARGED	
S19.000	S11a	5.102	0.202	0.000	0.02		4.1	SURCHARGED	
S20.000	PP_18	6.051	0.101	0.000	0.12		1.1	SURCHARGED	
S20.001	ORI_18	6.050	0.110	0.000	0.02		0.9	SURCHARGED	
S21.000	PP_19-53	6.175	0.075	0.000	0.03		0.1	SURCHARGED	
S21.001	ORI_19-53	6.174	0.084	0.000	0.00		0.1	SURCHARGED	
S1.007	S11	5.122	0.273	0.000	0.04		6.1	SURCHARGED	
S22.000	PP_20-21	6.567	0.117	0.000	0.05		0.4	SURCHARGED	
S22.001	ORI_20-21	6.566	0.126	0.000	0.01		0.4	SURCHARGED	
S22.002	S12	5.120	0.248	0.000	0.06		2.0	SURCHARGED	
S1.008	S13	5.128	0.338	0.000	0.06		5.9	SURCHARGED	
S23.000	PP_22-23	6.693	0.143	0.000	0.03		0.1	SURCHARGED	
S23.001	ORI_22-23	6.693	0.153	0.000	0.01		0.1	SURCHARGED	
S24.000	PP_24	6.682	0.132	0.000	0.03		0.1	SURCHARGED	
S24.001	ORI_24	6.681	0.141	0.000	0.01		0.1	SURCHARGED	
S23.002	S15	6.074	-0.219	0.000	0.01		0.2	OK	
S25.000	PP_25-26	6.592	0.142	0.000	0.03		0.1	SURCHARGED	
©1982-2018 Innovyze									

Odyssey Markides							Page 54			
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH						
XP Solutions				Network 2018.1						
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>										
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded	
S25.001	ORI_25-26	6.591	0.151	0.000	0.01		0.1	SURCHARGED		
©1982-2018 Innovyze										

Odyssey Markides						Page 55	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow
S26.000	PP_27	480 Winter	30	+0%	30/15 Summer		
S26.001	ORI_27	480 Winter	30	+0%	1/360 Winter		
S27.000	PP_28	480 Winter	30	+0%	30/240 Winter		
S27.001	ORI_28	480 Winter	30	+0%	30/240 Winter		
S23.003	S16	15 Winter	30	+0%	100/360 Winter		
S28.000	PP_29	120 Winter	30	+0%	30/15 Summer		
S28.001	ORI_29	120 Winter	30	+0%	30/15 Summer		
S23.004	S18	15 Winter	30	+0%	100/240 Winter		
S23.005	S19	15 Winter	30	+0%	100/240 Summer		
S29.000	PP_30	480 Winter	30	+0%	30/60 Winter		
S29.001	ORI_30	480 Winter	30	+0%	30/60 Winter		
S23.006	S20	15 Winter	30	+0%	100/120 Winter		
S30.000	PP_31	120 Winter	30	+0%	30/15 Summer		
S30.001	ORI_31	120 Winter	30	+0%	30/15 Summer		
S31.000	PP_32	480 Winter	30	+0%	30/60 Summer		
S31.001	ORI_32	480 Winter	30	+0%	30/30 Winter		
S32.000	PP_33	480 Winter	30	+0%	30/15 Winter		
S32.001	ORI_33	480 Winter	30	+0%	30/15 Summer		
S33.000	PP_34-35	360 Winter	30	+0%	30/15 Summer		
S33.001	ORI_34-35	360 Winter	30	+0%	30/15 Summer		
S34.000	PP_36	120 Winter	30	+0%	1/15 Summer		
S34.001	ORI_36	120 Winter	30	+0%	1/15 Summer		
S23.007	S21	15 Winter	30	+0%	100/15 Winter		
S35.000	S23a	480 Winter	30	+0%	100/120 Summer		
S23.008	S23	15 Winter	30	+0%	100/15 Summer		
S23.009	S24	15 Winter	30	+0%	100/15 Summer		
S36.000	PP_81-82	360 Winter	30	+0%	30/15 Summer		
S36.001	ORI_81-82	360 Winter	30	+0%	30/15 Summer		
S37.000	PP_83	480 Winter	30	+0%	30/15 Summer		
S37.001	ORI_83	480 Winter	30	+0%	1/240 Winter		
S38.000	PP_84-85	480 Winter	30	+0%	30/30 Summer		
S38.001	ORI_84-85	480 Winter	30	+0%	30/15 Winter		
S36.002	S29	15 Winter	30	+0%	30/15 Summer	100/15 Summer	
S39.000	PP_88	120 Winter	30	+0%	30/15 Summer		
S39.001	ORI_88	120 Winter	30	+0%	30/15 Summer		
S40.000	PP_86-87	240 Winter	30	+0%	30/15 Winter		
S40.001	ORI_86-87	240 Winter	30	+0%	30/15 Winter		
S41.000	PP_49-50	480 Winter	30	+0%	30/30 Winter		
S41.001	ORI_49-50	480 Winter	30	+0%	30/30 Winter		
S42.000	PP_48	240 Winter	30	+0%	30/15 Summer		
S42.001	ORI_48	240 Winter	30	+0%	30/15 Summer		
S43.000	PP_56-78	960 Winter	30	+0%	1/240 Summer		
S43.001	ORI_56-78	960 Winter	30	+0%	1/120 Winter		
S41.002	S25	15 Winter	30	+0%	100/15 Summer		
S44.000	PP_46-47	240 Winter	30	+0%	30/15 Winter		
S44.001	ORI_46-47	240 Winter	30	+0%	30/15 Winter		
S41.003	S26	15 Winter	30	+0%	100/15 Summer		
S45.000	PP_41-45	960 Winter	30	+0%	1/480 Winter		
©1982-2018 Innovyze							

Odyssey Markides								Page 56	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S26.000	PP_27		6.520	0.170	0.000	0.04		0.1	SURCHARGED
S26.001	ORI_27		6.519	0.179	0.000	0.01		0.1	SURCHARGED
S27.000	PP_28		6.388	0.038	0.000	0.05		0.2	SURCHARGED
S27.001	ORI_28		6.387	0.047	0.000	0.02		0.2	SURCHARGED
S23.003	S16		5.994	-0.127	0.000	0.38		14.7	OK
S28.000	PP_29		6.224	0.124	0.000	0.13		0.4	SURCHARGED
S28.001	ORI_29		6.222	0.132	0.000	0.04		0.4	SURCHARGED
S23.004	S18		5.614	-0.192	0.000	0.27		15.0	OK
S23.005	S19		5.586	-0.182	0.000	0.27		15.2	OK
S29.000	PP_30		5.983	0.033	0.000	0.03		0.1	SURCHARGED
S29.001	ORI_30		5.983	0.043	0.000	0.01		0.1	SURCHARGED
S23.006	S20		5.563	-0.159	0.000	0.44		24.8	OK
S30.000	PP_31		6.002	0.152	0.000	0.14		0.5	SURCHARGED
S30.001	ORI_31		6.000	0.160	0.000	0.05		0.4	SURCHARGED
S31.000	PP_32		6.205	0.055	0.000	0.03		0.1	SURCHARGED
S31.001	ORI_32		6.204	0.064	0.000	0.01		0.1	SURCHARGED
S32.000	PP_33		6.319	0.119	0.000	0.03		0.1	SURCHARGED
S32.001	ORI_33		6.318	0.128	0.000	0.01		0.1	SURCHARGED
S33.000	PP_34-35		6.260	0.160	0.000	0.08		0.3	SURCHARGED
S33.001	ORI_34-35		6.259	0.169	0.000	0.02		0.2	SURCHARGED
S34.000	PP_36		6.162	0.212	0.000	0.12		0.4	SURCHARGED
S34.001	ORI_36		6.161	0.221	0.000	0.02		0.3	SURCHARGED
S23.007	S21		5.452	-0.226	0.000	0.20		31.1	OK
S35.000	S23a		5.410	-0.120	0.000	0.02		2.3	OK
S23.008	S23		5.436	-0.063	0.000	0.09		9.0	OK
S23.009	S24		5.442	-0.033	0.000	0.07		6.9	OK
S36.000	PP_81-82		6.935	0.135	0.000	0.07		0.2	SURCHARGED
S36.001	ORI_81-82		6.933	0.143	0.000	0.02		0.2	SURCHARGED
S37.000	PP_83		6.782	0.182	0.000	0.04		0.1	SURCHARGED
S37.001	ORI_83		6.782	0.192	0.000	0.01		0.1	SURCHARGED
S38.000	PP_84-85		6.712	0.112	0.000	0.03		0.1	SURCHARGED
S38.001	ORI_84-85		6.712	0.122	0.000	0.01		0.1	SURCHARGED
S36.002	S29		6.417	0.077	0.000	1.06		20.7	SURCHARGED
S39.000	PP_88		6.035	0.135	0.000	0.14		0.5	SURCHARGED
S39.001	ORI_88		6.033	0.143	0.000	0.04		0.4	SURCHARGED
S40.000	PP_86-87		6.401	0.101	0.000	0.05		0.4	SURCHARGED
S40.001	ORI_86-87		6.401	0.111	0.000	0.01		0.4	SURCHARGED
S41.000	PP_49-50		6.639	0.139	0.000	0.01		0.1	SURCHARGED
S41.001	ORI_49-50		6.639	0.149	0.000	0.00		0.1	SURCHARGED
S42.000	PP_48		6.424	0.124	0.000	0.07		0.2	SURCHARGED
S42.001	ORI_48		6.423	0.133	0.000	0.02		0.2	SURCHARGED
S43.000	PP_56-78		6.503	0.203	0.000	0.08		0.3	SURCHARGED
S43.001	ORI_56-78		6.501	0.211	0.000	0.03		0.3	SURCHARGED
S41.002	S25		5.981	-0.109	0.000	0.51		19.3	OK
S44.000	PP_46-47		6.201	0.101	0.000	0.05		0.4	SURCHARGED
S44.001	ORI_46-47		6.201	0.111	0.000	0.02		0.4	SURCHARGED
S41.003	S26		5.838	-0.068	0.000	0.81		24.3	OK
©1982-2018 Innovyze									

Odyssey Markides							Page 57			
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH						
XP Solutions				Network 2018.1						
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>										
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	
S45.000	PP_41-45		6.576	0.176	0.000	0.03		0.1	SURCHARGED	

Odyssey Markides		Page 58																								
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton																									
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH																									
XP Solutions Network 2018.1																										
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>																										
	<table><thead><tr><th>PN</th><th>US/MH Name</th><th>Level Exceeded</th></tr></thead><tbody><tr><td>S43.000</td><td>PP_56-78</td><td></td></tr><tr><td>S43.001</td><td>ORI_56-78</td><td></td></tr><tr><td>S41.002</td><td>S25</td><td></td></tr><tr><td>S44.000</td><td>PP_46-47</td><td></td></tr><tr><td>S44.001</td><td>ORI_46-47</td><td></td></tr><tr><td>S41.003</td><td>S26</td><td></td></tr><tr><td>S45.000</td><td>PP_41-45</td><td></td></tr></tbody></table>	PN	US/MH Name	Level Exceeded	S43.000	PP_56-78		S43.001	ORI_56-78		S41.002	S25		S44.000	PP_46-47		S44.001	ORI_46-47		S41.003	S26		S45.000	PP_41-45		
PN	US/MH Name	Level Exceeded																								
S43.000	PP_56-78																									
S43.001	ORI_56-78																									
S41.002	S25																									
S44.000	PP_46-47																									
S44.001	ORI_46-47																									
S41.003	S26																									
S45.000	PP_41-45																									
©1982-2018 Innovyze																										

Odyssey Markides					Page 59		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow
S45.001	ORI_41-45	960 Winter	30	+0%	1/360 Winter		
S41.004	S27	15 Winter	30	+0%	100/15 Summer		
S46.000	PP_37-38	480 Winter	30	+0%	30/30 Winter		
S46.001	ORI_37-38	480 Winter	30	+0%	30/30 Summer		
S47.000	PP_39-40	480 Winter	30	+0%	30/30 Winter		
S47.001	ORI_39-40	480 Winter	30	+0%	30/30 Winter		
S41.005	S28	15 Winter	30	+0%	100/15 Summer		
S36.003	S30	15 Winter	30	+0%	30/15 Summer		
S48.000	PP_105	30 Winter	30	+0%	30/15 Summer		
S48.001	ORI_105	30 Winter	30	+0%	30/15 Summer		
S49.000	PP_106	360 Winter	30	+0%	30/30 Winter		
S49.001	ORI_106	360 Winter	30	+0%	30/30 Summer		
S50.000	PP_107	360 Winter	30	+0%	30/15 Summer		
S50.001	ORI_107	360 Winter	30	+0%	30/15 Summer		
S48.002	S31	15 Winter	30	+0%	100/15 Summer		
S51.000	PP_102	60 Winter	30	+0%	30/15 Summer		
S51.001	ORI_102	60 Winter	30	+0%	30/15 Summer		
S52.000	PP_100-101	360 Winter	30	+0%	30/15 Summer		
S52.001	ORI_100-101	360 Winter	30	+0%	30/15 Summer		
S53.000	PP_103-104	480 Winter	30	+0%	30/30 Winter		
S53.001	ORI_103-104	480 Winter	30	+0%	30/30 Summer		
S48.003	S32	15 Winter	30	+0%	100/15 Summer		
S48.004	S33	15 Winter	30	+0%	100/15 Summer		
S48.005	S34	15 Winter	30	+0%	100/15 Summer		
S54.000	PP_99	480 Winter	30	+0%	30/15 Summer		
S54.001	ORI_99	480 Winter	30	+0%	30/15 Summer		
S48.006	S35	15 Winter	30	+0%	100/15 Summer		
S55.000	PP_89	480 Winter	30	+0%	30/30 Winter		
S55.001	ORI_89	480 Winter	30	+0%	30/15 Winter		
S56.000	PP_91	480 Winter	30	+0%	30/15 Summer		
S56.001	ORI_91	480 Winter	30	+0%	1/240 Winter		
S48.007	S36	15 Winter	30	+0%	100/15 Summer		
S48.008	S37	30 Winter	30	+0%	100/15 Summer		
S36.004	S38	15 Winter	30	+0%	30/15 Winter		
S57.000	PP_92	240 Winter	30	+0%	30/15 Summer		
S57.001	ORI_92	240 Winter	30	+0%	30/15 Summer		
S36.005	S39	15 Winter	30	+0%	30/15 Winter		
S58.000	S40a	480 Winter	30	+0%	100/30 Winter		
S23.010	S40	15 Winter	30	+0%	30/15 Winter		
S59.000	POND	120 Winter	30	+0%	100/60 Winter		
S59.001	S41	120 Winter	30	+0%	1/15 Summer		
S60.000	PP_90-98	960 Winter	30	+0%	30/30 Winter		
S60.001	ORI_90-98	960 Winter	30	+0%	30/30 Winter		
S23.011	S42	15 Winter	30	+0%	30/15 Summer	100/240 Winter	
©1982-2018 Innovyze							

Odyssey Markides							Page 60		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>									
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S45.001	ORI_41-45		6.576	0.186	0.000	0.01		0.1	SURCHARGED
S41.004	S27		5.792	-0.069	0.000	0.82		24.6	OK
S46.000	PP_37-38		6.511	0.111	0.000	0.03		0.2	SURCHARGED
S46.001	ORI_37-38		6.511	0.121	0.000	0.01		0.2	SURCHARGED
S47.000	PP_39-40		6.433	0.083	0.000	0.03		0.2	SURCHARGED
S47.001	ORI_39-40		6.433	0.093	0.000	0.01		0.2	SURCHARGED
S41.005	S28		5.674	-0.142	0.000	0.50		34.3	OK
S36.003	S30		5.576	0.005	0.000	0.41		57.3	SURCHARGED
S48.000	PP_105		6.399	0.099	0.000	0.29		2.6	SURCHARGED
S48.001	ORI_105		6.394	0.104	0.000	0.08		2.5	SURCHARGED
S49.000	PP_106		6.361	0.061	0.000	0.03		0.1	SURCHARGED
S49.001	ORI_106		6.361	0.071	0.000	0.01		0.1	SURCHARGED
S50.000	PP_107		6.491	0.141	0.000	0.07		0.2	SURCHARGED
S50.001	ORI_107		6.489	0.149	0.000	0.02		0.2	SURCHARGED
S48.002	S31		5.801	-0.225	0.000	0.13		9.0	OK
S51.000	PP_102		6.124	0.124	0.000	0.21		0.7	SURCHARGED
S51.001	ORI_102		6.120	0.130	0.000	0.07		0.6	SURCHARGED
S52.000	PP_100-101		6.144	0.144	0.000	0.07		0.2	SURCHARGED
S52.001	ORI_100-101		6.142	0.152	0.000	0.03		0.2	SURCHARGED
S53.000	PP_103-104		6.154	0.104	0.000	0.03		0.1	SURCHARGED
S53.001	ORI_103-104		6.153	0.113	0.000	0.01		0.1	SURCHARGED
S48.003	S32		5.674	-0.162	0.000	0.42		27.1	OK
S48.004	S33		5.635	-0.086	0.000	0.46		26.7	OK
S48.005	S34		5.623	-0.047	0.000	0.51		29.8	OK
S54.000	PP_99		6.442	0.142	0.000	0.04		0.1	SURCHARGED
S54.001	ORI_99		6.441	0.151	0.000	0.01		0.1	SURCHARGED
S48.006	S35		5.599	-0.017	0.000	0.47		27.0	OK
S55.000	PP_89		6.178	0.078	0.000	0.03		0.1	SURCHARGED
S55.001	ORI_89		6.177	0.087	0.000	0.01		0.1	SURCHARGED
S56.000	PP_91		6.089	0.189	0.000	0.04		0.1	SURCHARGED
S56.001	ORI_91		6.089	0.199	0.000	0.01		0.1	SURCHARGED
S48.007	S36		5.568	0.000	0.000	0.23		28.2	OK
S48.008	S37		5.521	0.000	0.000	0.24		22.7	OK
S36.004	S38		5.511	0.010	0.000	0.68		69.9	SURCHARGED
S57.000	PP_92		6.004	0.104	0.000	0.07		0.2	SURCHARGED
S57.001	ORI_92		6.003	0.113	0.000	0.01		0.2	SURCHARGED
S36.005	S39		5.484	0.011	0.000	0.75		73.4	SURCHARGED
S58.000	S40a		5.409	-0.091	0.000	0.01		1.8	OK
S23.010	S40		5.464	0.014	0.000	0.18		24.9	SURCHARGED
S59.000	POND		6.245	-0.055	0.000	0.05		0.7	OK
S59.001	S41		6.244	0.394	0.000	0.01		0.2	SURCHARGED
S60.000	PP_90-98		6.294	0.144	0.000	0.03		0.3	SURCHARGED
S60.001	ORI_90-98		6.294	0.154	0.000	0.01		0.3	SURCHARGED
S23.011	S42		5.466	0.097	0.000	0.07		7.0	SURCHARGED
©1982-2018 Innovyze									

Odyssey Markides		Page 61
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>30 year Return Period Summary of Critical Results by Maximum Level (Rank 1)</u> <u>for SW Network</u>		

Odyssey Markides		Page 62
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	

100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network

Simulation Criteria

Areal Reduction Factor	1.000	Additional Flow - % of Total Flow	0.000
Hot Start (mins)	0	MADD Factor * 10m ³ /ha Storage	2.000
Hot Start Level (mm)	0	Inlet Coefficient	0.800
Manhole Headloss Coeff (Global)	0.500	Flow per Person per Day (l/per/day)	0.000
Foul Sewage per hectare (l/s)	0.000		

Number of Input Hydrographs	0	Number of Storage Structures	58
Number of Online Controls	57	Number of Time/Area Diagrams	0
Number of Offline Controls	0	Number of Real Time Controls	0

Synthetic Rainfall Details

Rainfall Model	FEH
FEH Rainfall Version	1999
Site Location	GB 498650 101750 SU 98650 01750
C (1km)	-0.025
D1 (1km)	0.390
D2 (1km)	0.245
D3 (1km)	0.403
E (1km)	0.310
F (1km)	2.321
Cv (Summer)	0.750
Cv (Winter)	0.840

Margin for Flood Risk Warning (mm)	300.0
Analysis Timestep	2.5 Second Increment (Extended)
DTS Status	OFF
DVD Status	ON
Inertia Status	ON

Profile(s)	Summer and Winter
Duration(s) (mins)	15, 30, 60, 120, 240, 360, 480, 960, 1440
Return Period(s) (years)	1, 30, 100
Climate Change (%)	0, 0, 40

PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surge	First (Y) Flood	First (Z) Overflow	Overflow Act.
S1.000	S1	480 Winter	100	+40%	100/240 Summer			
S1.001	S2	480 Winter	100	+40%	100/15 Summer			
S1.002	S3	480 Winter	100	+40%	100/15 Summer			
S1.003	S4	480 Winter	100	+40%	100/15 Summer			
S2.000	S5	480 Winter	100	+40%	100/120 Winter			
S3.000	PP_3-4	480 Winter	100	+40%	1/480 Winter			
S3.001	ORI_3-4	480 Winter	100	+40%	1/360 Winter			
S4.000	PP_1-2	480 Winter	100	+40%	30/30 Summer			
S4.001	ORI_1-2	480 Winter	100	+40%	30/15 Winter			
S5.000	PP_108	120 Winter	100	+40%	30/15 Summer			
S5.001	ORI_108	120 Winter	100	+40%	30/15 Summer			

Odyssey Markides		Page 63
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	

100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network

PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m ³)	Flow / Cap. (l/s)	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S1.000	S1	6.629	0.759	0.000	0.03		1.2	SURCHARGED	
S1.001	S2	6.629	0.898	0.000	0.11		4.2	SURCHARGED	
S1.002	S3	6.628	1.108	0.000	0.12		8.0	FLOOD RISK	
S1.003	S4	6.626	1.349	0.000	0.07		8.0	FLOOD RISK	
S2.000	S5	6.626	0.843	0.000	0.02		2.4	SURCHARGED	
S3.000	PP_3-4	6.831	0.481	0.000	0.06		0.2	SURCHARGED	
S3.001	ORI_3-4	6.831	0.491	0.000	0.01		0.2	SURCHARGED	
S4.000	PP_1-2	6.667	0.517	0.000	0.04		0.4	SURCHARGED	
S4.001	ORI_1-2	6.667	0.527	0.000	0.01		0.4	SURCHARGED	
S5.000	PP_108	6.850	0.400	0.000	0.15		0.5	SURCHARGED	
S5.001	ORI_108	6.849	0.409	0.000	0.02		0.3	SURCHARGED	

Odyssey Markides						Page 64		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton				
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH				
XP Solutions				Network 2018.1				
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>								
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surchage	First (Y) Flood	First (Z) Overflow	Overflow Act.
S1.004	S6	480 Winter	100	+40%	100/15 Summer			
S6.000	PP_76	480 Winter	100	+40%	30/30 Summer			
S6.001	ORI_76	480 Winter	100	+40%	30/15 Winter			
S7.000	PP_80	480 Winter	100	+40%	30/15 Winter			
S7.001	ORI_80	480 Winter	100	+40%	30/15 Summer			
S8.000	PP_79	360 Winter	100	+40%	30/15 Summer			
S8.001	ORI_79	360 Winter	100	+40%	30/15 Summer			
S9.000	PP_75	480 Winter	100	+40%	30/15 Summer			
S9.001	ORI_75	480 Winter	100	+40%	30/15 Summer			
S6.002	S7	480 Winter	100	+40%	100/360 Winter			
S10.000	PP_5-6	360 Winter	100	+40%	30/15 Winter			
S10.001	ORI_5-6	360 Winter	100	+40%	30/15 Summer			
S11.000	PP_7-8	480 Winter	100	+40%	1/480 Winter			
S11.001	ORI_7-8	480 Winter	100	+40%	1/360 Winter			
S12.000	PP_9-10	480 Winter	100	+40%	30/15 Winter			
S12.001	ORI_9-10	480 Winter	100	+40%	30/15 Summer			
S13.000	PP_11-12	480 Winter	100	+40%	30/30 Winter			
S13.001	ORI_11-12	480 Winter	100	+40%	30/30 Summer			
S1.005	S8	480 Winter	100	+40%	30/360 Winter			
S14.000	PP_54	480 Winter	100	+40%	30/15 Summer			
S14.001	ORI_54	480 Winter	100	+40%	30/15 Summer			
S15.000	PP_55	240 Winter	100	+40%	30/15 Summer			
S15.001	ORI_55	240 Winter	100	+40%	30/15 Summer			
S16.000	PP_51	120 Winter	100	+40%	30/15 Summer			
S16.001	ORI_51	120 Winter	100	+40%	30/15 Summer			
S14.002	S9	480 Winter	100	+40%	30/360 Winter			
S17.000	PP_13-14	960 Winter	100	+40%	100/60 Winter			
S17.001	ORI_13-14	960 Winter	100	+40%	100/60 Winter			
S18.000	PP_15	480 Winter	100	+40%	30/15 Summer			
S18.001	ORI_15	480 Winter	100	+40%	1/240 Winter			
S1.006	S10	480 Winter	100	+40%	30/60 Winter			
S19.000	S11a	480 Winter	100	+40%	30/60 Winter			
S20.000	PP_18	480 Winter	100	+40%	30/15 Summer			
S20.001	ORI_18	480 Winter	100	+40%	30/15 Summer			
S21.000	PP_19-53	480 Winter	100	+40%	30/60 Summer			
S21.001	ORI_19-53	480 Winter	100	+40%	30/30 Winter			
S1.007	S11	480 Winter	100	+40%	30/30 Winter			
S22.000	PP_20-21	360 Winter	100	+40%	30/15 Winter			
S22.001	ORI_20-21	360 Winter	100	+40%	30/15 Summer			
S22.002	S12	480 Winter	100	+40%	30/60 Winter			
S1.008	S13	480 Winter	100	+40%	30/15 Summer			
S23.000	PP_22-23	480 Winter	100	+40%	30/15 Winter			
S23.001	ORI_22-23	480 Winter	100	+40%	1/960 Winter			
S24.000	PP_24	480 Winter	100	+40%	30/15 Summer			
S24.001	ORI_24	480 Winter	100	+40%	30/15 Summer			
S23.002	S15	960 Winter	100	+40%	100/480 Winter			
S25.000	PP_25-26	480 Winter	100	+40%	30/15 Winter			
S25.001	ORI_25-26	480 Winter	100	+40%	30/15 Summer			
©1982-2018 Innovyze								

Odyssey Markides							Page 65		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S1.004	S6	6.625	1.380	0.000	0.09		13.9	FLOOD RISK	
S6.000	PP_76	6.904	0.304	0.000	0.05		0.2	SURCHARGED	
S6.001	ORI_76	6.904	0.314	0.000	0.01		0.1	SURCHARGED	
S7.000	PP_80	7.096	0.346	0.000	0.05		0.2	SURCHARGED	
S7.001	ORI_80	7.095	0.355	0.000	0.01		0.1	SURCHARGED	
S8.000	PP_79	6.869	0.419	0.000	0.11		0.4	SURCHARGED	
S8.001	ORI_79	6.867	0.427	0.000	0.03		0.3	SURCHARGED	
S9.000	PP_75	7.139	0.439	0.000	0.06		0.2	SURCHARGED	
S9.001	ORI_75	7.138	0.448	0.000	0.01		0.2	SURCHARGED	
S6.002	S7	6.628	0.316	0.000	0.07		2.8	SURCHARGED	
S10.000	PP_5-6	7.048	0.448	0.000	0.07		0.7	SURCHARGED	
S10.001	ORI_5-6	7.046	0.456	0.000	0.01		0.6	SURCHARGED	
S11.000	PP_7-8	7.070	0.470	0.000	0.06		0.2	SURCHARGED	
S11.001	ORI_7-8	7.070	0.480	0.000	0.01		0.2	SURCHARGED	
S12.000	PP_9-10	6.910	0.410	0.000	0.05		0.2	SURCHARGED	
S12.001	ORI_9-10	6.909	0.419	0.000	0.01		0.1	SURCHARGED	
S13.000	PP_11-12	6.680	0.330	0.000	0.05		0.2	SURCHARGED	
S13.001	ORI_11-12	6.679	0.339	0.000	0.00		0.1	SURCHARGED	
S1.005	S8	6.624	1.521	0.000	0.12		18.9	SURCHARGED	
S14.000	PP_54	6.779	0.429	0.000	0.05		0.2	SURCHARGED	
S14.001	ORI_54	6.779	0.439	0.000	0.01		0.1	SURCHARGED	
S15.000	PP_55	6.704	0.354	0.000	0.11		0.4	SURCHARGED	
S15.001	ORI_55	6.702	0.362	0.000	0.02		0.3	SURCHARGED	
S16.000	PP_51	6.929	0.429	0.000	0.12		1.1	SURCHARGED	
S16.001	ORI_51	6.927	0.437	0.000	0.02		1.0	SURCHARGED	
S14.002	S9	6.624	1.522	0.000	0.18		3.0	SURCHARGED	
S17.000	PP_13-14	6.705	0.305	0.000	0.02		0.1	SURCHARGED	
S17.001	ORI_13-14	6.705	0.315	0.000	0.00		0.1	SURCHARGED	
S18.000	PP_15	6.707	0.757	0.000	0.12		0.4	FLOOD RISK	
S18.001	ORI_15	6.707	0.767	0.000	0.01		0.4	FLOOD RISK	
S1.006	S10	6.621	1.694	0.000	0.17		23.3	SURCHARGED	
S19.000	S11a	6.619	1.719	0.000	0.03		4.4	FLOOD RISK	
S20.000	PP_18	6.658	0.708	0.000	0.13		1.2	FLOOD RISK	
S20.001	ORI_18	6.658	0.718	0.000	0.02		1.2	FLOOD RISK	
S21.000	PP_19-53	6.422	0.322	0.000	0.04		0.1	SURCHARGED	
S21.001	ORI_19-53	6.423	0.333	0.000	0.01		0.1	SURCHARGED	
S1.007	S11	6.619	1.770	0.000	0.05		7.3	FLOOD RISK	
S22.000	PP_20-21	6.884	0.434	0.000	0.07		0.7	SURCHARGED	
S22.001	ORI_20-21	6.883	0.443	0.000	0.01		0.6	SURCHARGED	
S22.002	S12	6.618	1.746	0.000	0.10		3.4	SURCHARGED	
S1.008	S13	6.616	1.826	0.000	0.07		7.0	FLOOD RISK	
S23.000	PP_22-23	6.952	0.402	0.000	0.05		0.2	SURCHARGED	
S23.001	ORI_22-23	6.951	0.411	0.000	0.01		0.1	SURCHARGED	
S24.000	PP_24	6.945	0.395	0.000	0.05		0.2	SURCHARGED	
S24.001	ORI_24	6.945	0.405	0.000	0.01		0.1	SURCHARGED	
S23.002	S15	6.369	0.076	0.000	0.01		0.5	SURCHARGED	
S25.000	PP_25-26	6.853	0.403	0.000	0.05		0.2	SURCHARGED	
©1982-2018 Innovyze									

Odyssey Markides							Page 66		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>									
PN	US/MH Name	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status	Level Exceeded
S25.001	ORI_25-26	6.852	0.412	0.000	0.01		0.1	SURCHARGED	
©1982-2018 Innovyze									

Odyssey Markides						Page 67	
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow
S26.000	PP_27	480 Winter	100	+40%	30/15 Summer		
S26.001	ORI_27	480 Winter	100	+40%	1/360 Winter		
S27.000	PP_28	480 Winter	100	+40%	30/240 Winter		
S27.001	ORI_28	480 Winter	100	+40%	30/240 Winter		
S23.003	S16	960 Winter	100	+40%	100/360 Winter		
S28.000	PP_29	120 Winter	100	+40%	30/15 Summer		
S28.001	ORI_29	120 Winter	100	+40%	30/15 Summer		
S23.004	S18	960 Winter	100	+40%	100/240 Winter		
S23.005	S19	960 Winter	100	+40%	100/240 Summer		
S29.000	PP_30	960 Winter	100	+40%	30/60 Winter		
S29.001	ORI_30	960 Winter	100	+40%	30/60 Winter		
S23.006	S20	960 Winter	100	+40%	100/120 Winter		
S30.000	PP_31	960 Winter	100	+40%	30/15 Summer		
S30.001	ORI_31	960 Winter	100	+40%	30/15 Summer		
S31.000	PP_32	960 Winter	100	+40%	30/60 Summer		
S31.001	ORI_32	960 Winter	100	+40%	30/30 Winter		
S32.000	PP_33	480 Winter	100	+40%	30/15 Winter		
S32.001	ORI_33	480 Winter	100	+40%	30/15 Summer		
S33.000	PP_34-35	480 Winter	100	+40%	30/15 Summer		
S33.001	ORI_34-35	480 Winter	100	+40%	30/15 Summer		
S34.000	PP_36	240 Winter	100	+40%	1/15 Summer		
S34.001	ORI_36	240 Winter	100	+40%	1/15 Summer		
S23.007	S21	960 Winter	100	+40%	100/15 Winter		
S35.000	S23a	960 Winter	100	+40%	100/120 Summer		
S23.008	S23	960 Winter	100	+40%	100/15 Summer		
S23.009	S24	960 Winter	100	+40%	100/15 Summer		
S36.000	PP_81-82	360 Winter	100	+40%	30/15 Summer		
S36.001	ORI_81-82	360 Winter	100	+40%	30/15 Summer		
S37.000	PP_83	480 Winter	100	+40%	30/15 Summer		
S37.001	ORI_83	480 Winter	100	+40%	1/240 Winter		
S38.000	PP_84-85	480 Winter	100	+40%	30/30 Summer		
S38.001	ORI_84-85	480 Winter	100	+40%	30/15 Winter		
S36.002	S29	15 Winter	100	+40%	30/15 Summer	100/15 Summer	
S39.000	PP_88	960 Winter	100	+40%	30/15 Summer		
S39.001	ORI_88	960 Winter	100	+40%	30/15 Summer		
S40.000	PP_86-87	360 Winter	100	+40%	30/15 Winter		
S40.001	ORI_86-87	360 Winter	100	+40%	30/15 Winter		
S41.000	PP_49-50	480 Winter	100	+40%	30/30 Winter		
S41.001	ORI_49-50	480 Winter	100	+40%	30/30 Winter		
S42.000	PP_48	240 Winter	100	+40%	30/15 Summer		
S42.001	ORI_48	240 Winter	100	+40%	30/15 Summer		
S43.000	PP_56-78	960 Winter	100	+40%	1/240 Summer		
S43.001	ORI_56-78	960 Winter	100	+40%	1/120 Winter		
S41.002	S25	960 Winter	100	+40%	100/15 Summer		
S44.000	PP_46-47	360 Winter	100	+40%	30/15 Winter		
S44.001	ORI_46-47	360 Winter	100	+40%	30/15 Winter		
S41.003	S26	960 Winter	100	+40%	100/15 Summer		
S45.000	PP_41-45	960 Winter	100	+40%	1/480 Winter		
©1982-2018 Innovyze							

Odyssey Markides		Page 68
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions Network 2018.1		

100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network

PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m ³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S26.000	PP_27		6.824	0.474	0.000	0.06		0.2	SURCHARGED
S26.001	ORI_27		6.823	0.483	0.000	0.02		0.2	SURCHARGED
S27.000	PP_28		6.690	0.340	0.000	0.10		0.3	SURCHARGED
S27.001	ORI_28		6.688	0.348	0.000	0.03		0.3	SURCHARGED
S23.003	S16		6.368	0.247	0.000	0.08		3.2	SURCHARGED
S28.000	PP_29		6.501	0.401	0.000	0.22		0.7	SURCHARGED
S28.001	ORI_29		6.498	0.408	0.000	0.06		0.6	SURCHARGED
S23.004	S18		6.365	0.559	0.000	0.27		15.1	SURCHARGED
S23.005	S19		6.365	0.597	0.000	0.26		14.7	SURCHARGED
S29.000	PP_30		6.275	0.325	0.000	0.04		0.1	SURCHARGED
S29.001	ORI_30		6.275	0.335	0.000	0.01		0.1	SURCHARGED
S23.006	S20		6.364	0.642	0.000	0.23		13.2	FLOOD RISK
S30.000	PP_31		6.390	0.540	0.000	0.16		0.5	SURCHARGED
S30.001	ORI_31		6.389	0.549	0.000	0.06		0.5	SURCHARGED
S31.000	PP_32		6.411	0.261	0.000	0.04		0.1	SURCHARGED
S31.001	ORI_32		6.410	0.270	0.000	0.01		0.1	SURCHARGED
S32.000	PP_33		6.573	0.373	0.000	0.05		0.2	SURCHARGED
S32.001	ORI_33		6.572	0.382	0.000	0.01		0.1	SURCHARGED
S33.000	PP_34-35		6.563	0.463	0.000	0.11		0.4	SURCHARGED
S33.001	ORI_34-35		6.561	0.471	0.000	0.02		0.3	SURCHARGED
S34.000	PP_36		6.422	0.472	0.000	0.13		0.4	SURCHARGED
S34.001	ORI_36		6.420	0.480	0.000	0.03		0.4	SURCHARGED
S23.007	S21		6.363	0.685	0.000	0.06		9.4	FLOOD RISK
S35.000	S23a		6.363	0.833	0.000	0.21		24.4	FLOOD RISK
S23.008	S23		6.363	0.864	0.000	0.28		28.4	SURCHARGED
S23.009	S24		6.363	0.888	0.000	0.32		31.8	FLOOD RISK
S36.000	PP_81-82		7.212	0.412	0.000	0.11		0.4	SURCHARGED
S36.001	ORI_81-82		7.210	0.420	0.000	0.02		0.3	SURCHARGED
S37.000	PP_83		7.110	0.510	0.000	0.06		0.2	SURCHARGED
S37.001	ORI_83		7.110	0.520	0.000	0.01		0.2	SURCHARGED
S38.000	PP_84-85		6.941	0.341	0.000	0.05		0.2	SURCHARGED
S38.001	ORI_84-85		6.940	0.350	0.000	0.01		0.1	SURCHARGED
S36.002	S29		7.455	1.115	1.066	1.65		32.4	FLOOD
S39.000	PP_88		6.393	0.493	0.000	0.13		0.4	SURCHARGED
S39.001	ORI_88		6.393	0.503	0.000	0.04		0.4	SURCHARGED
S40.000	PP_86-87		6.699	0.399	0.000	0.07		0.6	SURCHARGED
S40.001	ORI_86-87		6.697	0.407	0.000	0.01		0.6	SURCHARGED
S41.000	PP_49-50		6.949	0.449	0.000	0.02		0.2	SURCHARGED
S41.001	ORI_49-50		6.949	0.459	0.000	0.00		0.2	SURCHARGED
S42.000	PP_48		6.689	0.389	0.000	0.12		0.4	SURCHARGED
S42.001	ORI_48		6.688	0.398	0.000	0.03		0.3	SURCHARGED
S43.000	PP_56-78		6.766	0.466	0.000	0.10		0.3	SURCHARGED
S43.001	ORI_56-78		6.764	0.474	0.000	0.04		0.3	SURCHARGED
S41.002	S25		6.375	0.285	0.000	0.09		3.5	SURCHARGED
S44.000	PP_46-47		6.499	0.399	0.000	0.07		0.6	SURCHARGED
S44.001	ORI_46-47		6.497	0.407	0.000	0.03		0.6	SURCHARGED
S41.003	S26		6.372	0.466	0.000	0.42		12.7	SURCHARGED

Odyssey Markides							Page 69		
Tuscany House White Hart Lane Basingstoke RG21 4AF			Burndell Road, Yapton						
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX			Designed by SG Checked by LH						
XP Solutions			Network 2018.1						
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>									
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S45.000	PP_41-45		6.840	0.440	0.000	0.05		0.2	SURCHARGED
	PN	US/MH Name	Level Exceeded						
	S26.000	PP_27							
	S26.001	ORI_27							
	S27.000	PP_28							
	S27.001	ORI_28							
	S23.003	S16							
	S28.000	PP_29							
	S28.001	ORI_29							
	S23.004	S18							
	S23.005	S19							
	S29.000	PP_30							
	S29.001	ORI_30							
	S23.006	S20							
	S30.000	PP_31							
	S30.001	ORI_31							
	S31.000	PP_32							
	S31.001	ORI_32							
	S32.000	PP_33							
	S32.001	ORI_33							
	S33.000	PP_34-35							
	S33.001	ORI_34-35							
	S34.000	PP_36							
	S34.001	ORI_36							
	S23.007	S21							
	S35.000	S23a							
	S23.008	S23							
	S23.009	S24							
	S36.000	PP_81-82							
	S36.001	ORI_81-82							
	S37.000	PP_83							
	S37.001	ORI_83							
	S38.000	PP_84-85							
	S38.001	ORI_84-85							
	S36.002	S29			2				
	S39.000	PP_88							
	S39.001	ORI_88							
	S40.000	PP_86-87							
	S40.001	ORI_86-87							
	S41.000	PP_49-50							
	S41.001	ORI_49-50							
	S42.000	PP_48							
	S42.001	ORI_48							
©1982-2018 Innovyze									

Odyssey Markides		Page 70
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>		

Odyssey Markides					Page 71		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton			
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH			
XP Solutions				Network 2018.1			
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>							
PN	US/MH Name	Storm	Return Period	Climate Change	First (X) Surcharge	First (Y) Flood	First (Z) Overflow
S45.001	ORI_41-45	960 Winter	100	+40%	1/360 Winter		
S41.004	S27	960 Winter	100	+40%	100/15 Summer		
S46.000	PP_37-38	480 Winter	100	+40%	30/30 Winter		
S46.001	ORI_37-38	480 Winter	100	+40%	30/30 Summer		
S47.000	PP_39-40	480 Winter	100	+40%	30/30 Winter		
S47.001	ORI_39-40	480 Winter	100	+40%	30/30 Winter		
S41.005	S28	960 Winter	100	+40%	100/15 Summer		
S36.003	S30	960 Winter	100	+40%	30/15 Summer		
S48.000	PP_105	30 Winter	100	+40%	30/15 Summer		
S48.001	ORI_105	30 Winter	100	+40%	30/15 Summer		
S49.000	PP_106	480 Winter	100	+40%	30/30 Winter		
S49.001	ORI_106	480 Winter	100	+40%	30/30 Summer		
S50.000	PP_107	360 Winter	100	+40%	30/15 Summer		
S50.001	ORI_107	360 Winter	100	+40%	30/15 Summer		
S48.002	S31	960 Winter	100	+40%	100/15 Summer		
S51.000	PP_102	120 Winter	100	+40%	30/15 Summer		
S51.001	ORI_102	120 Winter	100	+40%	30/15 Summer		
S52.000	PP_100-101	480 Winter	100	+40%	30/15 Summer		
S52.001	ORI_100-101	480 Winter	100	+40%	30/15 Summer		
S53.000	PP_103-104	960 Winter	100	+40%	30/30 Winter		
S53.001	ORI_103-104	960 Winter	100	+40%	30/30 Summer		
S48.003	S32	960 Winter	100	+40%	100/15 Summer		
S48.004	S33	960 Winter	100	+40%	100/15 Summer		
S48.005	S34	960 Winter	100	+40%	100/15 Summer		
S54.000	PP_99	480 Winter	100	+40%	30/15 Summer		
S54.001	ORI_99	480 Winter	100	+40%	30/15 Summer		
S48.006	S35	960 Winter	100	+40%	100/15 Summer		
S55.000	PP_89	960 Winter	100	+40%	30/30 Winter		
S55.001	ORI_89	960 Winter	100	+40%	30/15 Winter		
S56.000	PP_91	960 Winter	100	+40%	30/15 Summer		
S56.001	ORI_91	960 Winter	100	+40%	1/240 Winter		
S48.007	S36	960 Winter	100	+40%	100/15 Summer		
S48.008	S37	960 Winter	100	+40%	100/15 Summer		
S36.004	S38	960 Winter	100	+40%	30/15 Winter		
S57.000	PP_92	960 Winter	100	+40%	30/15 Summer		
S57.001	ORI_92	960 Winter	100	+40%	30/15 Summer		
S36.005	S39	960 Winter	100	+40%	30/15 Winter		
S58.000	S40a	960 Winter	100	+40%	100/30 Winter		
S23.010	S40	960 Winter	100	+40%	30/15 Winter		
S59.000	POND	480 Winter	100	+40%	100/60 Winter		
S59.001	S41	480 Winter	100	+40%	1/15 Summer		
S60.000	PP_90-98	960 Winter	100	+40%	30/30 Winter		
S60.001	ORI_90-98	960 Winter	100	+40%	30/30 Winter		
S23.011	S42	960 Winter	100	+40%	30/15 Summer	100/240 Winter	
©1982-2018 Innovyze							

Odyssey Markides							Page 72		
Tuscany House White Hart Lane Basingstoke RG21 4AF				Burndell Road, Yapton					
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX				Designed by SG Checked by LH					
XP Solutions				Network 2018.1					
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>									
PN	US/MH Name	Overflow Act.	Water Level (m)	Surcharged Depth (m)	Flooded Volume (m³)	Flow / Cap.	Overflow (l/s)	Pipe Flow (l/s)	Status
S45.001	ORI_41-45		6.840	0.450	0.000	0.01		0.2	SURCHARGED
S41.004	S27		6.371	0.510	0.000	0.41		12.1	SURCHARGED
S46.000	PP_37-38		6.811	0.411	0.000	0.04		0.4	SURCHARGED
S46.001	ORI_37-38		6.810	0.420	0.000	0.01		0.4	SURCHARGED
S47.000	PP_39-40		6.703	0.353	0.000	0.04		0.3	SURCHARGED
S47.001	ORI_39-40		6.702	0.362	0.000	0.01		0.3	SURCHARGED
S41.005	S28		6.370	0.554	0.000	0.12		8.2	SURCHARGED
S36.003	S30		6.366	0.795	0.000	0.16		22.1	SURCHARGED
S48.000	PP_105		6.735	0.435	0.000	0.48		4.3	SURCHARGED
S48.001	ORI_105		6.727	0.437	0.000	0.12		3.9	SURCHARGED
S49.000	PP_106		6.551	0.251	0.000	0.04		0.1	SURCHARGED
S49.001	ORI_106		6.550	0.260	0.000	0.01		0.1	SURCHARGED
S50.000	PP_107		6.777	0.427	0.000	0.11		0.4	SURCHARGED
S50.001	ORI_107		6.775	0.435	0.000	0.03		0.3	SURCHARGED
S48.002	S31		6.370	0.344	0.000	0.05		3.3	SURCHARGED
S51.000	PP_102		6.407	0.407	0.000	0.31		1.0	SURCHARGED
S51.001	ORI_102		6.402	0.412	0.000	0.11		0.9	SURCHARGED
S52.000	PP_100-101		6.443	0.443	0.000	0.11		0.4	SURCHARGED
S52.001	ORI_100-101		6.442	0.452	0.000	0.04		0.3	SURCHARGED
S53.000	PP_103-104		6.428	0.378	0.000	0.04		0.1	SURCHARGED
S53.001	ORI_103-104		6.427	0.387	0.000	0.02		0.1	SURCHARGED
S48.003	S32		6.370	0.534	0.000	0.22		14.2	SURCHARGED
S48.004	S33		6.368	0.647	0.000	0.20		11.5	SURCHARGED
S48.005	S34		6.368	0.698	0.000	0.20		11.9	SURCHARGED
S54.000	PP_99		6.726	0.426	0.000	0.06		0.2	SURCHARGED
S54.001	ORI_99		6.725	0.435	0.000	0.01		0.2	SURCHARGED
S48.006	S35		6.367	0.751	0.000	0.21		12.3	SURCHARGED
S55.000	PP_89		6.415	0.315	0.000	0.04		0.1	SURCHARGED
S55.001	ORI_89		6.415	0.325	0.000	0.01		0.1	SURCHARGED
S56.000	PP_91		6.466	0.566	0.000	0.05		0.2	SURCHARGED
S56.001	ORI_91		6.465	0.575	0.000	0.01		0.2	SURCHARGED
S48.007	S36		6.366	0.798	0.000	0.10		13.1	SURCHARGED
S48.008	S37		6.365	0.844	0.000	0.17		16.5	FLOOD RISK
S36.004	S38		6.365	0.864	0.000	0.35		35.6	FLOOD RISK
S57.000	PP_92		6.369	0.469	0.000	0.09		0.3	SURCHARGED
S57.001	ORI_92		6.369	0.479	0.000	0.02		0.3	SURCHARGED
S36.005	S39		6.363	0.890	0.000	0.38		36.9	FLOOD RISK
S58.000	S40a		6.362	0.862	0.000	0.25		38.5	FLOOD RISK
S23.010	S40		6.362	0.912	0.000	0.35		49.6	FLOOD RISK
S59.000	POND		6.337	0.037	0.000	0.03		0.3	SURCHARGED
S59.001	S41		6.337	0.487	0.000	0.01		0.2	SURCHARGED
S60.000	PP_90-98		6.629	0.479	0.000	0.04		0.4	SURCHARGED
S60.001	ORI_90-98		6.629	0.489	0.000	0.01		0.3	SURCHARGED
S23.011	S42		6.359	0.990	9.248	0.07		7.0	FLOOD
©1982-2018 Innovyze									

Odyssey Markides		Page 73
Tuscany House White Hart Lane Basingstoke RG21 4AF	Burndell Road, Yapton	
Date 15/07/2019 10:24 File 18-070 SW NETWORK.MDX	Designed by SG Checked by LH	
XP Solutions	Network 2018.1	
<u>100 year Return Period Summary of Critical Results by Maximum Level (Rank 1) for SW Network</u>		