0.00 A.O.D.

PH2 BOUNDARY — 25.00m — PH2 BOUNDARY

Chainage	Existing Level	Proposed Level
0.000	1.199	
5.000	1.185	
10.000	1.188	
15.000	1.191	
20.000	1.185	
25.000	1.159	
30.000	1.122	
35.000	1.098	
40.000	1.112	
45.000	1.107	
50.000	1.102	
55.000	1.097	
60.000	1.093	
65.000	1.097	
70.000	1.115	
75.000	1.133	
80.000	1.107	
85.000	1.080	
90.000	1.051	
95.000	1.023	
100.000	1.004	
105.000	1.022	
110.000	1.039	
115.000	1.056	
120.000	1.058	
125.000	1.026	
130.000	0.993	
135.000	1.006	
140.000	1.018	
145.000	1.031	
150.000	1.043	
155.000	1.055	
160.000	1.068	
165.000	1.080	
170.000	1.075	
175.000	1.034	
180.000	0.992	
185.000	0.951	
190.000	0.932	
195.000	0.953	
200.000	0.974	
205.000	0.995	
210.000	1.005	
215.000	1.016	
220.000	1.025	
225.000	1.048	
230.000	1.081	
235.000	1.125	
240.000	1.169	
245.000	1.213	
250.000	1.218	
255.000	1.158	
260.000	1.164	
265.000	1.213	
270.000	1.246	
275.000	1.287	
280.000	1.363	
285.000	1.404	
290.000	1.438	
295.000	1.394	
300.000	1.291	
305.000	1.089	
310.000	1.027	
315.000	1.339	
320.000	1.527	
323.144	1.534	

A–A

Horiz. 1:500 Vert. 1:250

0.00 A.O.D.

PH2 BOUNDARY — 25.00m — PH2 BOUNDARY

Chainage	Existing Level	Proposed Level
0.000	3.000	
5.000	2.922	
10.000	2.813	
15.000	2.684	
20.000	2.696	
25.000	2.540	
30.000	2.251	
35.000	1.082	
40.000	1.402	
45.000	1.465	
50.000	1.430	
55.000	1.324	
60.000	1.244	
65.000	1.195	
70.000	1.154	
75.000	1.113	
80.000	1.116	
85.000	1.120	
90.000	1.107	
95.000	1.065	
100.000	1.042	
105.000	1.059	
110.000	1.059	
115.000	1.043	
120.000	1.052	
125.000	1.061	
130.000	1.095	
135.000	1.133	
140.000	1.238	
145.000	1.413	
150.000	1.551	

B–B

Horiz. 1:500 Vert. 1:250

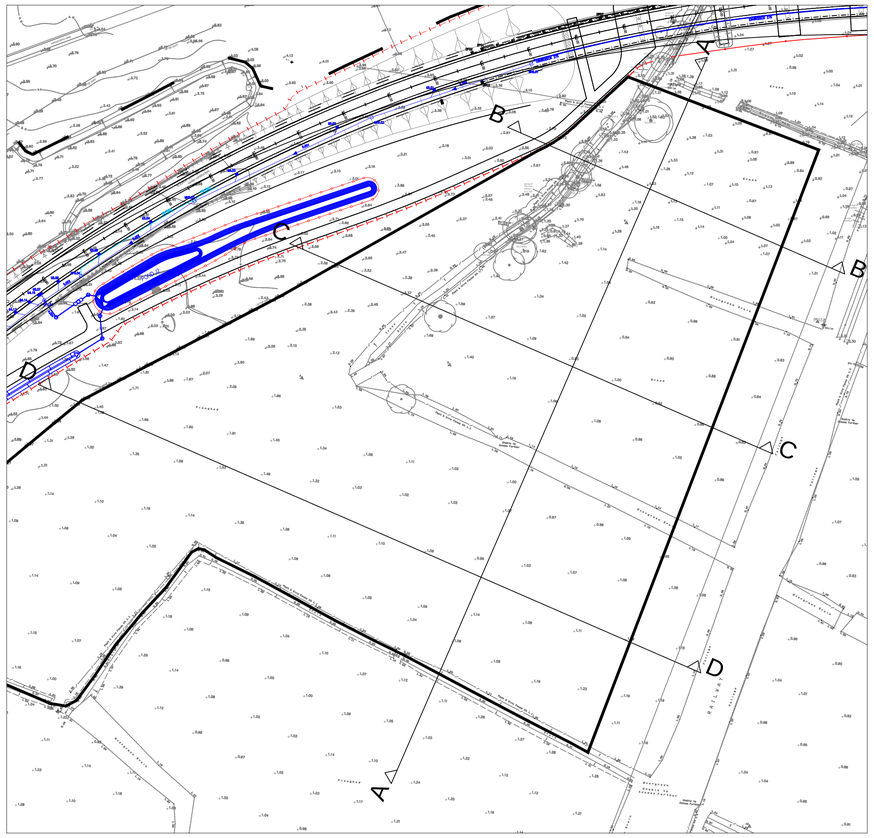

0.00 A.O.D.

PH2 BOUNDARY — 25.00m — PH2 BOUNDARY

Chainage	Existing Level	Proposed Level
0.000	2.776	
5.000	2.703	
10.000	2.644	
15.000	2.586	
20.000	2.649	
25.000	2.599	
30.000	2.538	
35.000	2.504	
40.000	2.461	
45.000	2.417	
50.000	2.375	
55.000	2.206	
60.000	2.018	
65.000	1.829	
70.000	1.641	
75.000	1.548	
80.000	1.538	
85.000	1.531	
90.000	1.473	
95.000	1.345	
100.000	1.217	
105.000	1.098	
110.000	1.055	
115.000	1.012	
120.000	0.969	
125.000	0.948	
130.000	0.962	
135.000	0.978	
140.000	0.995	
145.000	0.995	
150.000	0.973	
155.000	0.950	
160.000	0.929	
165.000	0.922	
170.000	0.932	
175.000	0.941	
180.000	0.951	
185.000	0.945	
190.000	0.937	
195.000	0.929	
200.000	0.923	
205.000	0.938	
210.000	0.952	
215.000	0.967	

C–C

Horiz. 1:500 Vert. 1:250

0.00 A.O.D.

PH2 BOUNDARY — 25.00m — PH2 BOUNDARY

Chainage	Existing Level	Proposed Level
0.000	1.650	
5.000	1.587	
10.000	1.485	
15.000	1.376	
20.000	1.366	
25.000	1.390	
30.000	1.420	
35.000	1.481	
40.000	1.539	
45.000	1.595	
50.000	1.635	
55.000	1.674	
60.000	1.713	
65.000	1.716	
70.000	1.671	
75.000	1.626	
80.000	1.589	
85.000	1.543	
90.000	1.502	
95.000	1.480	
100.000	1.453	
105.000	1.392	
110.000	1.325	
115.000	1.258	
120.000	1.209	
125.000	1.170	
130.000	1.118	
135.000	1.075	
140.000	1.078	
145.000	1.080	
150.000	1.082	
155.000	1.084	
160.000	1.086	
165.000	1.089	
170.000	1.091	
175.000	1.078	
180.000	1.054	
185.000	1.031	
190.000	1.014	
195.000	1.033	
200.000	1.051	
205.000	1.070	
210.000	1.069	
215.000	1.062	
220.000	1.072	
225.000	1.083	
230.000	1.090	
235.000	1.096	
240.000	1.102	
245.000	1.102	
250.000	1.099	
255.000	1.095	
260.000	1.091	
265.000	1.102	
270.000	1.118	
275.000	1.135	
280.000	1.151	
285.000	1.146	
290.000	1.123	
295.000	1.100	

D–D

Horiz. 1:500 Vert. 1:250

REV. No.	DATE	DESCRIPTION	INITIALS

Client: HANBURY HOMES

Project: Phase 2 Oldlands Farm, Bognor Regis

MJA CONSULTING
CIVIL AND STRUCTURAL ENGINEERS
58-62 Ock Street, Abingdon
Oxon, OX14 5BZ
Tel: 01235 555173
Fax: 01235 523226

Title: Raised Levels Sections

Scale	Date	Drawing No.	Rev
As Shown@A1	16/01/15	5130:03	
Checked	Drawn HJS		

© This drawing is the copyright of Michael A Jennings Associates Limited and may not be copied, altered or reproduced in any way without their permission.