ARUN DISTRICT COUNCIL A1121/1/CLP

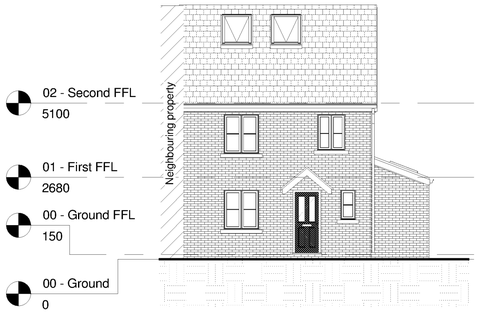

4 South - Proposed
1 : 100

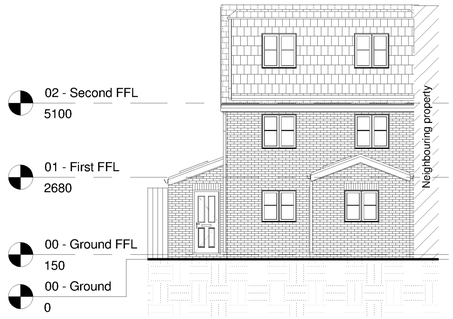

5 North - Proposed
1 : 100

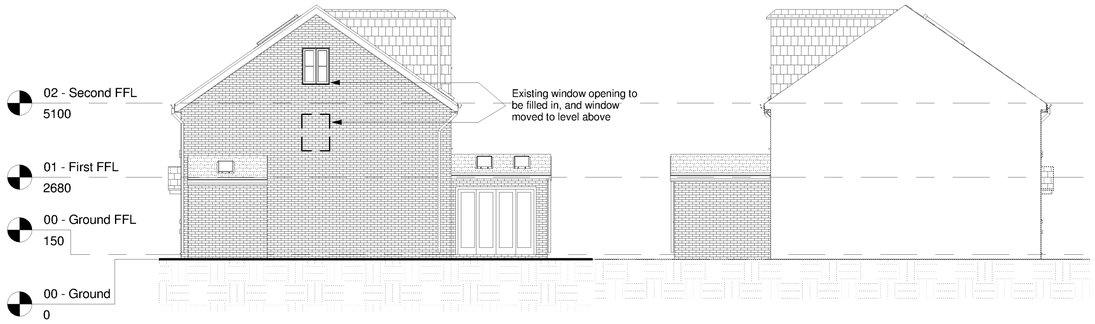

6 East - Proposed
1 : 100

7 West - Proposed
1 : 100

1:100 @ A1 / 1:200 @ A3

meters 2 4 6 8 10

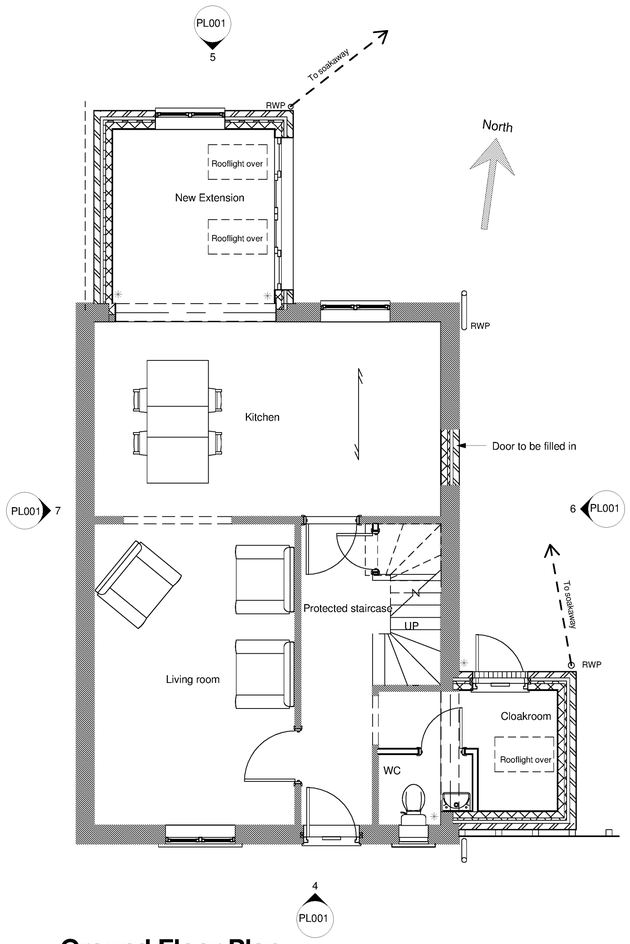

1 Ground Floor Plan
1 : 50

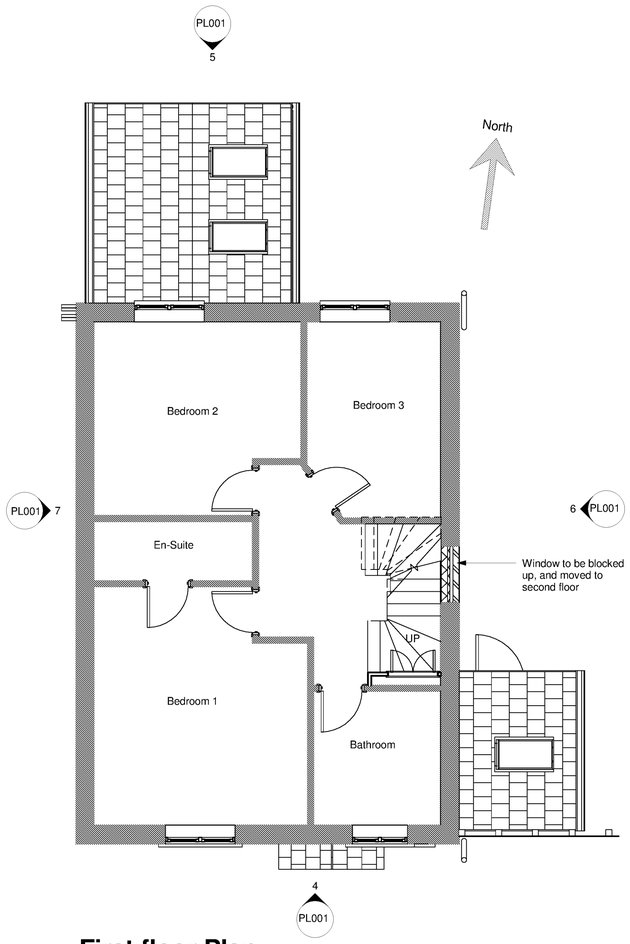

2 First floor Plan
1 : 50

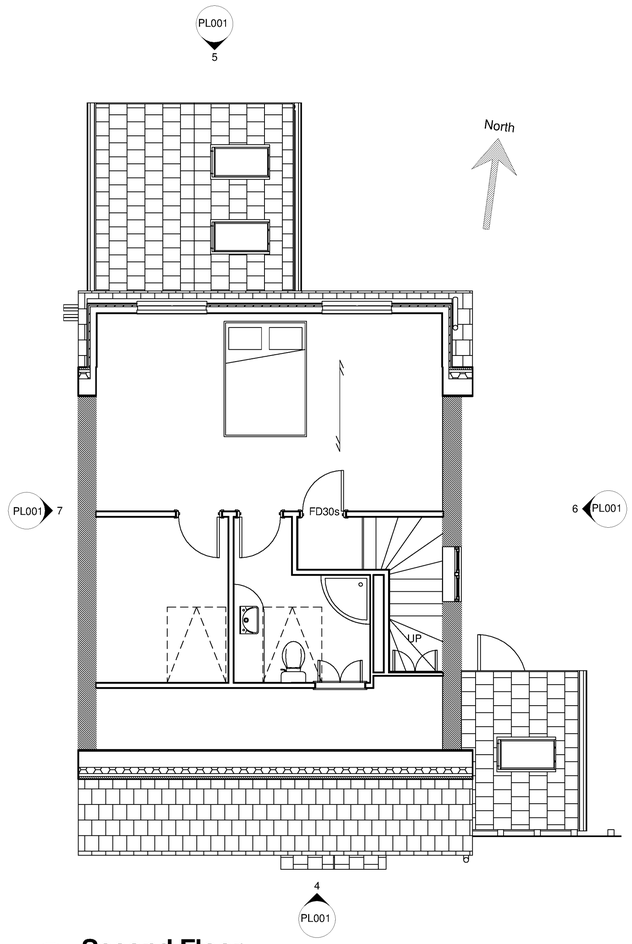

3 Second Floor
1 : 50

1:50 @ A1 / 1:100 @ A3

meters 1 2 3 4 5

General notes

No dimensions to be scaled from drawing except for planning purposes

The contractor should check all dimensions on site

MATERIALS TO MATCH EXISTING

Key
1 : 50

- Assumed span of existing joists
- New structural element to S.Eng specification
- Overhead boxing to encapsulate steel
- Existing wall
- Facing brickwork to match existing
- New Blockwork, refer to builders notes
- Insulation, please refer to builders notes for detailed buildups
- Well rammed hardcore
- FDS30 — 30 min fire door setwith intumescent strips and cold smoke seals
- Make existing cavity continuous with new cavity wall. Inner leaf to be tied in to existing with S/S furfix connectors. Outer leaf to be bonded
- RWP — Rain water pipe

No.	Description	Date
1	Preliminary Issue	12.05.17
2	Updated to clients comments	18.05.17
3	Issued for CLD	06.06.17
4	Amended to Councils commets	02.07.17
5	North point amended	04.07.17
6	West Elevation added	05.07.17

Mr & Mrs Woods

11 Roman Avenue

Proposed Plans/Elevations

Project number	05/17
Date	02.07.17
Drawn by	ng
To be printed @ A1	
PL001	
Scale	As indicated

06/07/2017 13:52:38