
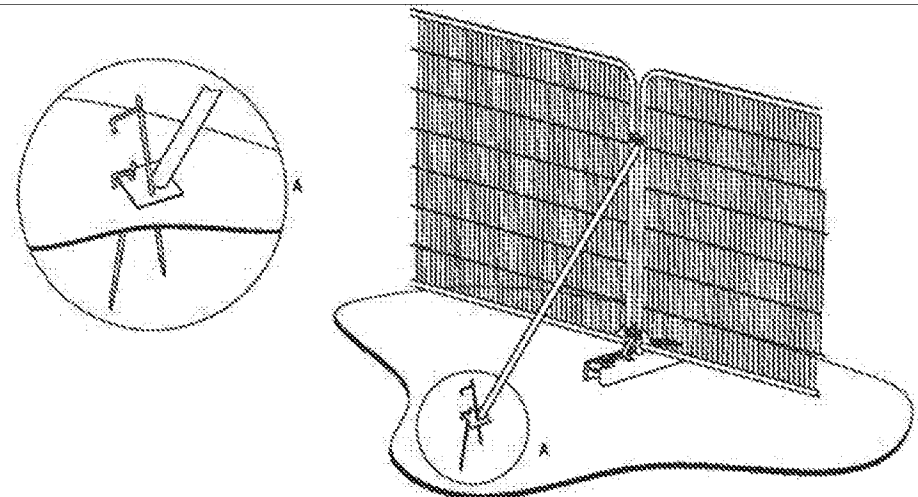


All fencing shall be installed prior to any plant activity on site whatsoever, including: demolition, utility installation, groundworks, and soil stripping

Once erected, all TPF will be regarded as sacrosanct, and will not be removed or altered without prior recommendation by the project architect/contractor and approval of the local planning authority. The TPF shall comprise of interlocking weld-mesh panels (e.g. Heras), well braced by attachment to scaffold pole uprights driven firmly into the ground. Should any alternative method of barrier construction be proposed, consultation with the project architect/contractor will be obtained to clarify the efficacy of the revised design prior to informing the local planning authority and obtaining their consent. Once the exclusion zone has been protected by barriers and/or ground protection, construction work can commence. All weather notices may be erected on the barriers.

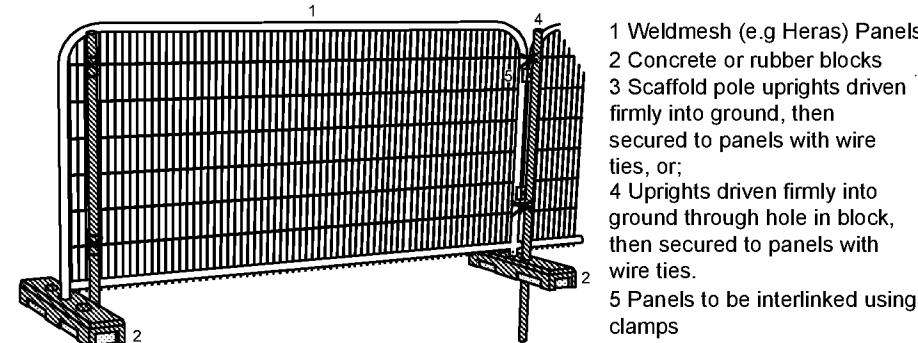

Inside the exclusion area of the fencing, the following shall apply:

- No mechanical excavation whatsoever
- No excavation by any other means without arboricultural site supervision
- No hand digging without a written method statement having first been approved by the project arboriculturist
- No lowering of levels for any purpose (except removal of grass sward using hand tools)
- No storage of plant or materials
- No storage or handling of any chemical including cement washings
- No vehicular access
- No fuel/jetters

In addition to the above, further precautions are necessary adjacent to trees:

- No substances injurious to tree health, including fuels, oil, bitumen, cement (including cement washings), builders sand, concrete mixing and other chemicals shall be stored or used within or directly adjacent to the protection areas of retained trees
- No fire shall be lit such that flames come within 5m of tree foliage.

1. Tree removal and access facilitation pruning
2. Accurate erection of tree protection fencing
3. Site accessible to construction/demolition traffic
4. Demolition/site clearance
5. Construction
6. Removal of tree protection fencing
7. Remedial tree surgery

The above phasing must not be changed without approval from the project arboriculturist and agreement with the Council.

A diagram of a cell with a dashed outline. Inside the cell is a small circle labeled 'T1', representing the nucleus.


A diagram of a cell. It has a large, irregular outer boundary. Inside, there is a smaller, roughly circular nucleus with a textured interior. To the right of the nucleus is a large, clear, oval-shaped vacuole. The space between the nucleus and the vacuole is filled with small dots representing cytoplasm.

A diagram of a cell with a nucleus labeled T1. The nucleus is a small, dark, circular structure within a larger, irregularly shaped cell boundary.


Hedge to be trimmed back from the red dashed line to the green line as indicated.

- A CATEGORY TREE
B CATEGORY TREE
C CATEGORY TREE
U CATEGORY TREE

(See Arboricultural Method Statement for further details)



NOTE:
FOR PLANNING PURPOSES ONLY
DO NOT SCALE FROM DRAWING



B	07.02.2019	Revised layout	TRG
A	21.01.2019	Revised layout	TRG
Rev	Date	Details	Drawn



HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN6 6E5
Tel: 01666 825646

Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714
Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 8SX

Tel: 02382 026300

9 Bowdoin Road, Cambridge, CB4 5NG
Tel: 07825 868654
email: mail@aodenv.co.uk
www.aodenvironmental.co.uk

Copyright of ACD. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2015. Copyright of this plan remains with ACD until all fees have been paid in full.

scheme: Land West of New Barn
Lane, North Bersted
client: Linden Homes
drawing: Tree Protection Plan
date: 10.12.2018
scale: 1:500@A0
dwg no: LIN22251-03B
drawn: TRG checked: MW