


NOTES:

1. This drawing is to be read in conjunction with all relevant contract drawings and specifications with any conflicting information to be brought to the attention of Deacon Design before works commence on site.
2. Do not scale from this drawing, (except for planning application purposes only) always work to noted dimensions.
3. All given dimensions in mm.



- KEY**
- Application Site boundary
 - Soft Landscape**
 - Existing trees to be retained. Redline denotes Root Protection Area (RPA) to be read in accordance with Aspect Tree Report
 - Existing trees to be removed see Aspect Arboriculture drawings for details
 - Existing boundary vegetation to be retained and enhanced with infill planting to reinforce habitat corridors
 - Proposed Tree Planting
 - Proposed Orchard Tree Planting in Community Orchard (min. 2,115 sqm)
 - Proposed specimen shrub planting
 - Proposed wall shrubs / climbers
 - Proposed native / ornamental shrub planting Species mix appropriate to landscape setting / ecological enhancement opportunities
 - Formal hedgerow to main roads and to define private front gardens facing public realm
 - Proposed native mix hedgerow to the boundary of the entrance
 - Proposed Scrub Mix Dormouse Mitigation and Ecological Enhancement Area
 - Proposed meadow mix to public open space. Species mix appropriate to landscape setting / ecological enhancement opportunities
 - Proposed Earthworks mound to Public Open Space, 1/3 gradient banks and 600mm high, with footpath at top of the bank
 - Proposed mown paths through the Public Open Space
 - Proposed amenity lawn to verges (service margins) - Emorsgate EL1 - Flowering Lawn Mixture or similar and approved
 - Proposed amenity grass to rear garden lawns - Emorsgate EM1 or similar and approved
 - Attenuation Basin
 - Proposed Wetland Seed Mix to swales and SuDs Basins - Emorsgate EM8: Meadow Mixture for Wetlands, or similar and approved
 - Cow pallets: 2mx1m positioned along the Mean Water Level (1 metre below water line, 1 metre above water line), Salix Cow Pallets or similar and approved: 83 L/m

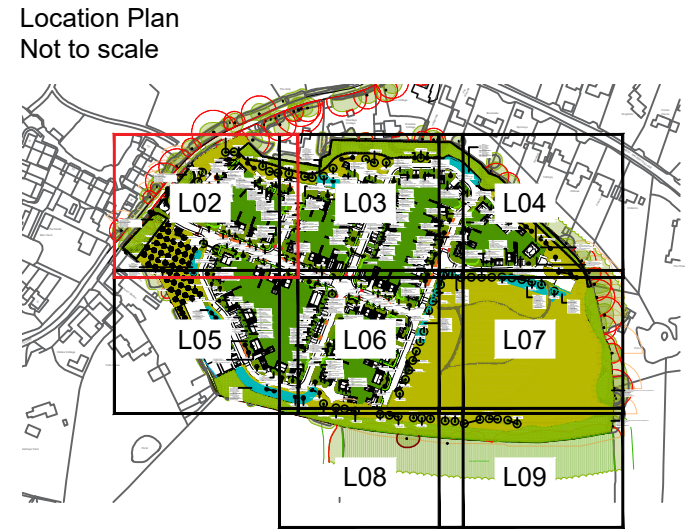

FINAL

01/10/20	VE	Amended to show the SuDs and tactile paving updated	C	TN
14/08/20	DO	Amended to planners comments	B	TN
12/08/20	DO	Updated layout/structure to planners comments	A	TN

DATE	DRAWN	DESCRIPTION OF REVISION	REVISION LETTER	CHECKED BY
------	-------	-------------------------	-----------------	------------

DRAWING STATUS
FOR PLANNING

D

DEACON DESIGN

Landscape Architecture | Masterplanning | Urban Design
1 Purbeck House, 1a Wallington Hill, Fareham, PO16 7BJ
www.deacondesign.co.uk | info@deacondesign.co.uk
Copyright Deacon Design Ltd

PROJECT TITLE:
Land off Wandleys Lane

Fontwell

PROJECT NUMBER:
DD730

PLOT DATE:
10.06.26

DRAWING SCALE:
1:200

APPROVED BY:
MM

PAPER SIZE:
A1

DRAWN BY:
TN

DRAWING TITLE:
Detailed Planting Plan

1 of 8

DRAWING NUMBER:
DD730L02

REVISION LETTER:
C

DRAWING FILE LOCATION:
Z:\Deacon Design Ltd Dropbox\03 PROJECTS 700\DD730_Land East of Wandleys Lane

Fontwell\04-Drawings\AutoCAD_Kayscape\1-Landscape Design\DD730L02-09_Detailed Planting Plan.dwg