


CROWN WATER Data Sheet

92 mm QR5 Type Vortex Flow Control

Job Ref : 10250821


Client Name	Bright Plan Civils	Date	25/08/2021
Project Name	Woodgate	For the attention of	Liam Ford

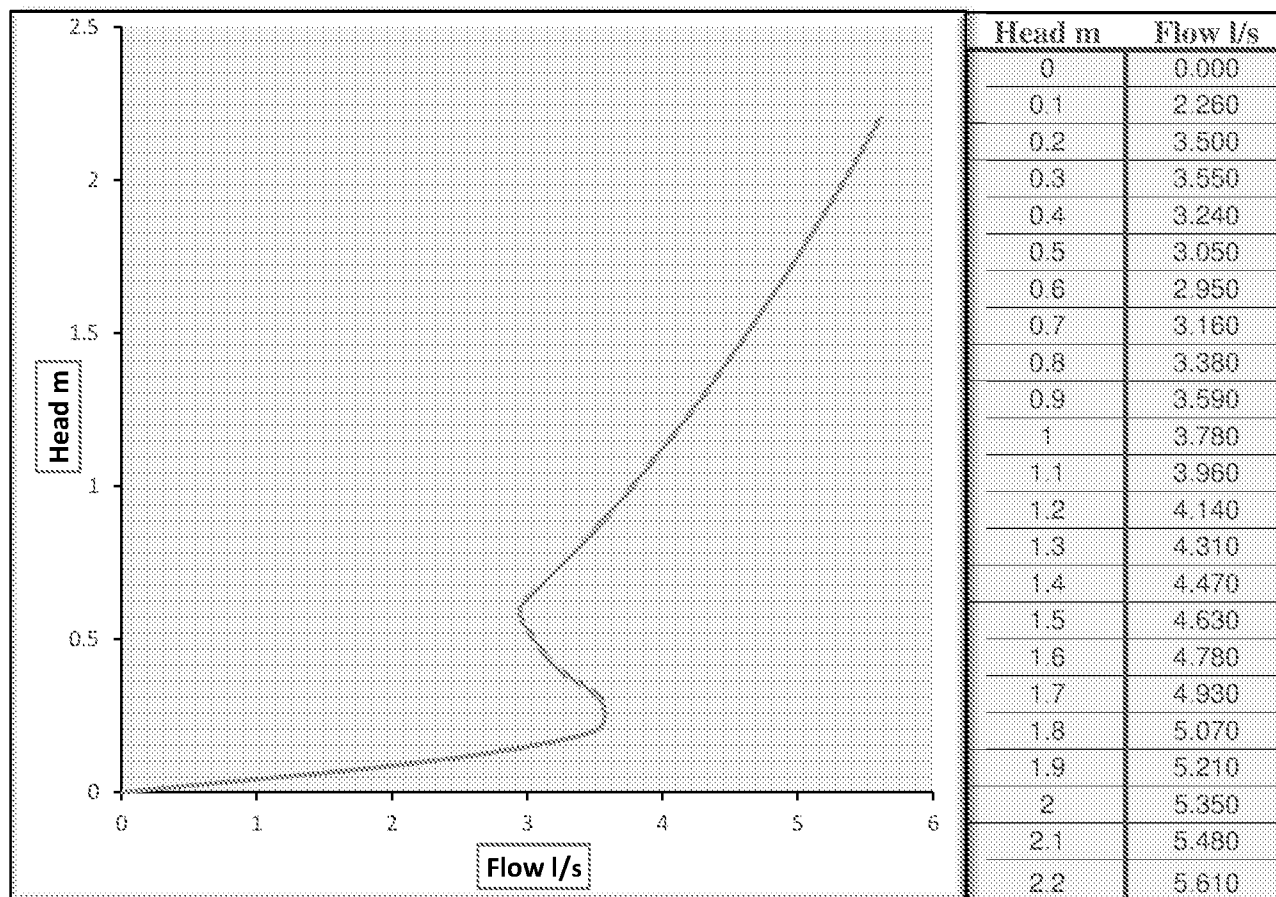

Design Flow	5 l/s	Flush Flow	3.62 l/s
Design Head	1.75 m	At Head	0.244 m
Minimum Pipe/Pipe	150 mm	Kickback Flow	2.96 l/s
Sump Depth	290 mm	At Head	0.595 m

Note: Surface Water Only

Crown Water Ltd
 Index House
 Ascot SL5 7ET
 Tel 01344 886996 Fax 01344 886646
 sales@crownwater.com
 Company Registration Number 9514593



ISO
 9001 : 2015
 REGISTERED

Cert No. 14126967

www.crownwater.com

Copyright Crown Water Ltd 2017

CROWN WATER

FLOW CONTROL QUOTATION REF. 10250821

Client Name	Bright Plan Civils	Date	25/08/2021
Project Name	Woodgate	For the attention of	Liam Ford

Crown Water Flow Control Units

Design Flow 5 l/s Design Head 1.75 m

1 no, Crown Water 92mm QR5 Vortex Flow Control Unit with Integral Pivoting bypass door
Price £ 939 Ex VAT

Note: Surface Water Only

Scope

- All price(s) ex VAT. Quotations valid for 90 days
- Includes design, manufacture in 3mm ASI 304 Stainless Steel and UK delivery.
- Includes the required Stainless Steel Fixing Bolts and directions for installation by others

Delivery

- Delivery Normally 10 to 14 Days.

Terms

- Written Order or confirmation required
- Approved accounts: Payment within 30 days of invoice. Otherwise payment with order or pro forma prior to shipping

Crown Water Ltd


Index House

Ascot SL5 7ET

Tel 01344 886996 Fax 01344 886646

sales@crownwater.com

Company Registration Number 9514593



**ISO
9001 : 2015
REGISTERED**

Cert No. 14120867

www.crownwater.com

Copyright Crown Water Ltd 2017




CROWN WATER

Job Ref 10250821

92 mm QR5 Type Vortex Flow Control

Client Name	Bright Plan Civils	Date	25/08/2021
Project Name	Woodgate	For the attention of	Liam Ford

Crown Water Radial Type Vortex Flow Control Unit Installation Guide

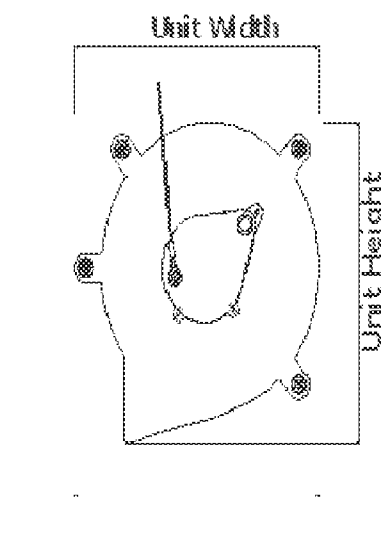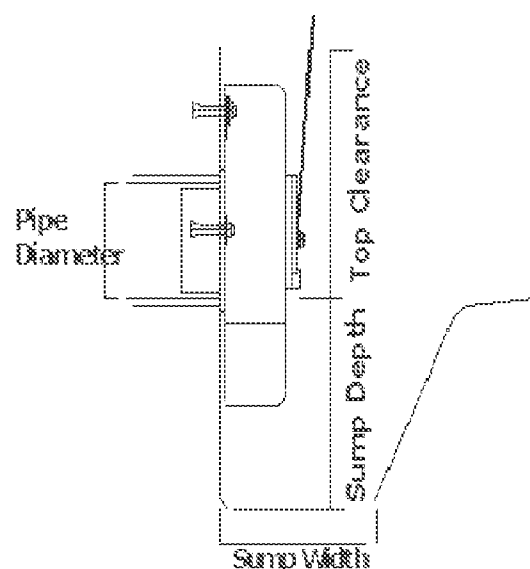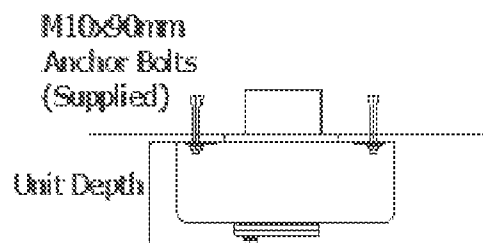

Unit Outlet Diameter	92mm	Sump Depth (Min)	290 mm
Unit Height	520 mm	Sump Width (Min)	280 mm
Unit Width	470 mm	Pipe Diameter (Min)	150mm
Unit Depth	130 mm	Top Clearance(Min)	300 mm

Note: Surface Water Only

Crown Water Ltd


Index House

Ascot SL5 7ET

Tel 01344 886996 Fax 01344 886646

sales@crownwater.com

Company Registration Number 9514593



ISO
9001 : 2015
REGISTERED

Cert No. 14126867

www.crownwater.com

Copyright Crown Water Ltd 2017

CROWN WATER

FLOW CONTROL QUOTATION REF. 10250821

Product Information and FAQ's

DESIGN

Individual Design.

All of our Vortex Flow Control Units are individually designed to meet the client's optimum performance criteria.

Will our Vortex Flow Control's Block?

The relatively large cross sectional areas and high internal velocities greatly reduce the risk of blockage.

How Long Will They Last?

Crown Water Vortex Flow Control Units have no moving parts to wear or fail. Made from stainless steel plate they will resist scour, degradation and chemical attack. A Vortex Flow Control should outlast the sewer in which it is installed.

MANUFACTURE

Crown Water Vortex Flow Control Units are manufactured to a high standard

- 304 Grade Stainless Steel as standard. Other material optional.
- Plate thickness 3mm as standard Thicker plate used where required.
- Pulse arc Tungsten Inert Gas Welding. All seams continuous for maximum strength.
- Emergency Bypass Door fitted as standard to allow drain down and rodding access.
- Externally regulated ISO 9001:2008 Quality Assurance System

INSTALLATION

All of our Vortex Flow Controls are purpose built to suit the specific site and to fit easily into the drainage infrastructure. Units can be specially designed for retrofitting or for installation in difficult spaces

MAINTENANCE

Vortex Flow Control units themselves require no routine maintenance. Inspection chambers require inspection & maintenance in line with current practice.

WHAT DESIGN INFORMATION DO WE NEED?

We require the following basic information to specify a Vortex Flow Control for you.

- 1) The design Flow - *Maximum Discharge*
- 2) The design Head - *Invert to Top Water Level*

From this information we will size and design the Vortex Flow Control to meet the design criteria and to suit the proposed infrastructure.

SPECIFICATION

Includes: -

- 1) Data Sheet showing the Head/Discharge Characteristic, both graphically and numerically.
- 2) Installation Guide showing the outline dimensions of the specified Vortex Flow Control and the method of fixing.
- 3) Quotation covering the design manufacture and

Note: Surface Water Only

Crown Water Ltd

Index House


Ascot SL5 7ET

Tel 01344 886996 Fax 01344 886646

sales@crownwater.com

Company Registration Number 9514593

www.crownwater.com



**ISO
9001 : 2015
REGISTERED**

Cert. No. 14126567

Copyright Crown Water Ltd 2017