

WALLPOD:EV READY

FREE-TO-USE

13A Socket Mode 2 Charging

(Upgradable to full Mode 3
Fast Charging)

ROLEC

EV

MANUFACTURED IN THE UK



The WALLPOD:EV READY is a low-cost Electric Vehicle (EV/PHEV) charging unit, designed for the new home build.

Planning permissions are increasingly stipulating that new residential home builds must consider and make provision for an electric vehicle charging point. As well as occasional EV charging in Mode 2 format, and doubling up as an outdoor IP65 rated domestic 13A socket, WALLPOD:EV READY is also prepped to be upgraded at any time to a full Mode 3 fast charger.



Unit shown: WALLPOD:EV READY
13amp Socket (Mode 2) Charging Unit

PRODUCT FEATURES

- * Occasional Mode 2 EV charging
- * For use with Mode 2 charging cables
- * Can be easily upgraded to full IEC 61851-1 Mode 3 EV fast charging (Upgrade kits are available throughout the UK wholesaler network)
- * IP65 protected 13A outdoor maintenance socket ideal for home/ garden maintenance, charging mobility scooters, electric bikes, etc.
- * Built-in overload and fault current protection (Type A RCBO)
- * Easy to install & maintain
- * IP65 weather proof
- * UV stabilised
- * Corrosion resistant
- * Fire retardant
- * Impact resistant




13A Outdoor
Maintenance Socket



For Use With Mode 2
Charging Cables



Upgradable To EV
Mode 3 Fast Charging



Colour Options
Available





IP65 Weather Proof
& UV Stabilised



Flame
Retardant


SPECIFICATIONS

Product Code	EVWP0020
Socket	13A domestic outdoor maintenance socket
Rated Output	Up to 2kW
Rated Current	13A
Charge Protocol	Mode 2 (occasional use)
Input Voltage	230V AC/50Hz (Single Phase)
Overload & Fault Current Protection	Built-in 16A 30mA Type A RCBO
Cable Terminals	16mm earth
Certifications & Compliances	EV Charging Compliance – EN 61851-1:2001, EN 61851-21:2002, EN 61851-22:2002 Wiring Regulations – BS 7671 EMC Compliance – EN 61000-6-3:2007, EN 61000-6-2:2005 Safety Compliance (LVD) – 2014/35/EU, EN 62366-1:2014 Environmental Protection – Enclosure IP65, Socket IP65 (BS EN 60529:1992+A2:2013)
CE	
Dimensions	179mm x 367mm x 142mm (w x h x d)
Unit Material	Polycarbonate (303 EP-22)
Operating Temperature	-30°C to +50°C
Standard Base Colour	Warm White (Other colours available upon request)
Standard Pod Colour	Green (Other colours available upon request)

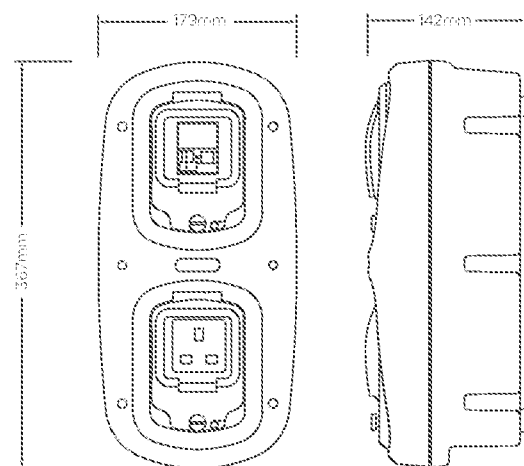

OPTIONS & ACCESSORIES

- * Key switch control charging
- * Lockable door to switchgear
- * Built-in class 1 MID compliant kWh meter
- * Built-in time clock providing charge time management
- * Corporate branding (colours, logo badge, etc.)
- * Portable Mode 2 EV charging cables
(Type 1 Mode 2 to UK 3Pin or Type 2 Mode 2 to UK 3Pin)



The plug pod was specifically designed for use with charge cables which are fitted with a British standard (BS 1363) 3 pin plug. It is not recommended anything other than a British standard compliant plugs should be used. Rolec cannot qualify the use of any OEM international, non-standard or oversize plugs.

Images are for marketing purposes only and are not contractual © 2020

WPEVRD-05



Head office contact:



Rolec Services Ltd
Ratons Lane, Frampton West
Boston, Lincolnshire
UK PE20 1GUT

@RolecEV
/ Rolec-Services
www.rolecserv.com