

4. Proposals Overview

The proposals have been developed in accordance with current guidance and in response to the feedback received as part of the outline consent and during the determination period.

Layout

The site has been organised with a simple hierarchical order. Development is set back from the main highway, providing separation that helps create a distinct identity for the site.

The care home acts as a gateway to the development, with its massing serving to transition from the public areas into the more private housing development. The housing layout itself is largely defined by the retained ProW that organically divides the site and provides a series of public space/landscaped nodes throughout the development. Dwellings generally face onto this public route, encouraging a sense of community and promoting interaction.

The design has been also influenced by the existing hard boundary conditions, existing levels and the scale and massing of the adjacent residential areas.

Access

Access into the site is via a single access junction from the A259 (RMA consent A/83/18/RES) which forms a main street which splits into two. From these main streets are the secondary access roads, shared surface parking areas and landscaped amenity areas.

Scale

The development will include a range of dwelling types and tenures. The density has been proposed with consideration to the pattern and grain of the surrounding areas, and also the suburban context and its transition from townscape to rural landscape. The dwelling form and massing has been informed by surrounding developments.

Landscape

The site provides a number of ecologically rich environments and aspires to be a development set within significant green landscaping. The scheme features a wildlife corridor, wetland attenuation ponds, retained existing significant trees and hedgerows. The scheme proposes new trees and landscape planting to maintain and enhance biodiversity as well as the screening along the site boundaries. Dedicated public spaces (including a LEAP and 3No LAPs) provide a variety of external meeting environments.

Appearance

The materials used within the development will be complimentary to residential architecture in the area but are used consistency across the development to help form a neighbourhood identity. The palette will feature anthracite grey roof tiles, red brick, stained timber cladding with grey to frames for the windows and doors.



4. Layout - Masterplan Proposals Design Strategy

The proposals aim to ensure that the development has a strong identity and neighbourhood feel with each plot featuring dedicated parking, cycle and bin stores, front and back gardens and access to shared landscaped areas.


On accessing the site via the improved junction at Brook Lane, the access road winds through a well-landscaped setting before arriving at the care home which acts as the entrance to the development.

The site is generally inward looking with house fronts facing streets and shared spaces and private space to the rear, this assists in providing a natural surveillance.

Existing and proposed landscape buffers help to define plot boundaries to the north and south with a mixture of soft and hard landscape treatments forming the linear plot divisions.

The road layout has been largely defined by the retained PRoW. The PRoW forms the basis for a series of nodal community spaces that provide a variety of environments for residents to use. Dedicated LEAP & LAP spaces are provided in accordance with the outline consent and benefit from enhanced areas of landscaping.

The layout steps across the site and creates different communal spaces. The orientation of houses varies and helps to define spaces and create a sense of place. In addition to this the varied distances between the houses add variety to the density across the site.



The overall density of the site is lower than some of the surrounding developments which gives opportunity to benefit from retaining and enhancing the existing landscaped areas, retaining and providing ecological areas and giving the overall site a sense of place defined by green space and new and established trees. This also promotes well-being for residents with a priority being given to external communal spaces.

Affordable / Intermediate

1 Bed Flat	8 units
2 Bed Flat / 2 Bed House	8 / 4 units
3 Bed House	8 units

	1 Bed Flat / 1 Bed House	2 / 2 units
	2 Bed Flat / 2 Bed House	21 units
	3 Bed House	32 units
	4 bed House	1 units

Category	Percentage of Development
Affordable Housing	31% of development
Private Housing	69% of development



4. Layout - Masterplan Accommodation Schedule

This accommodation schedule is based on the masterplan set out over the previous pages.

The heading “Beds” describes the number of bedrooms and occupancy level, for example 3B 5P is a three-bedroom, five-person dwelling.

GIA m² is the minimum gross internal area allowable under the Technical Housing Standards - Nationally Described Space Standards (Mar 2015, with May 2016 notes).

Plot	Type	Tenure	Format	Beds	Arrangement	GIA m ²
01	INT.3H.1	Intermediate	Semi-detached house	3B 5P	2 storey	93.80
02	INT.3H.1	Intermediate	Semi-detached house	3B 5P	2 storey	93.80
03	INT.1F.1	Intermediate	Ground floor flat	1B 2P	GF single storey	52.03
04	INT.2F.1	Intermediate	Ground floor flat	2B 4P	GF single storey	73.36
05	INT.1F.1	Intermediate	First floor flat	1B 2P	FF single storey	52.03
06	INT.2F.1	Intermediate	First floor flat	2B 4P	FF single storey	73.36
07	AFF.3H.1	Affordable	Semi-detached house	3B 5P	2 storey	93.80
08	AFF.3H.1	Affordable	Semi-detached house	3B 5P	2 storey	93.80
09	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
10	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
11	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
12	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
13	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
14	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
15	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
16	AFF.2H.1	Affordable	Semi-detached house	2B 4P	2 storey	79.68
17	AFF.1F.1	Affordable	Ground floor flat	1B 2P	GF single storey	52.03
18	AFF.2F.1	Affordable	Ground floor flat	2B 4P	GF single storey	73.36
19	AFF.1F.1	Affordable	First floor flat	1B 2P	FF single storey	52.03
20	AFF.2F.1	Affordable	First floor flat	2B 4P	FF single storey	73.36
21	P.3H.1	Private	Detached house	3B 5P	2 storey, wide front	105.20
22	P.3H.5	Private	Detached house	3B 5P	2 storey	95.13
23	P.3H.5	Private	Detached house	3B 5P	2 storey	95.13
24	P.3H.5	Private	Detached house	3B 5P	2 storey	95.13
25	P.3H.2	Private	Detached house	3B 5P	2 storey, wide front	105.20
26	P.3H.3	Private	Detached house	3B 5P	2 storey, wide front	106.66
27	P.3H.1	Private	End-terraced house	2B 4P	2 storey	87.00

28	P.2H.1	Private	Mid-terraced house	2B 4P	2 storey	87.00
29	P.2H.1	Private	Mid-terraced house	2B 4P	2 storey	87.00
30	P.2H.1	Private	End-terraced house	2B 4P	2 storey	87.00
31	P.3H.4	Private	Detached house	3B 5P	2 storey, wide front	105.20
32	P.3H.3	Private	Detached house	3B 5P	2 storey, wide front	106.66
33	P.3H.6	Private	Semi-detached house	3B 5P	2 storey, corner front	93.57
34	P.3H.6	Private	Semi-detached house	3B 5P	2 storey, corner front	93.57
35	P.2H.1	Private	End-terraced house	2B 4P	2 storey	87.00
36	P.2H.1	Private	Mid-terraced house	2B 4P	2 storey	87.00
37	P.2H.1	Private	End-terraced house	2B 4P	2 storey	87.00
38	P.3H.7	Private	Semi-detached house	3B 5P	2 storey	92.62
39	P.3H.7	Private	Semi-detached house	3B 5P	2 storey	92.62
40	P.2H.1	Private	Semi-detached house	2B 4P	2 storey	87.00
41	P.2H.1	Private	Semi-detached house	2B 4P	2 storey	87.00
42	P.2H.1	Private	Semi-detached house	2B 4P	2 storey	87.00
43	P.2H.1	Private	Semi-detached house	2B 4P	2 storey	87.00
44	P.2F.1	Private	Ground floor flat	2B 4P	GF single storey	54.87
45	P.2F.1	Private	Ground floor flat	2B 4P	GF single storey	54.87
46	P.2F.2	Private	First floor flat	2B 4P	FF single storey	54.87
47	P.2F.2	Private	First floor flat	2B 4P	FF single storey	54.87
48	P.2F.3	Private	Ground floor flat	2B 4P	GF single storey	73.36
49	P.1F.1	Private	Ground floor flat	1B 2P	GF single storey	52.03
50	P.2F.3	Private	First floor flat	2B 4P	FF single storey	73.36
51	P.1F.1	Private	First floor flat	1B 2P	FF single storey	52.03
52	AFF.1F.1	Affordable	Ground floor flat	1B 2P	GF single storey	52.03
53	AFF.2F.1	Affordable	Ground floor flat	2B 4P	GF single storey	73.36
54	AFF.1F.1	Affordable	First floor flat	1B 2P	FF single storey	52.03
55	AFF.2F.1	Affordable	First floor flat	2B 4P	FF single storey	73.36
56	AFF.1F.1	Affordable	Ground floor flat	1B 2P	GF single storey	52.03
57	AFF.2F.1	Affordable	Ground floor flat	2B 4P	GF single storey	73.36
58	AFF.1F.1	Affordable	First floor flat	1B 2P	FF single storey	52.03
59	AFF.2F.1	Affordable	First floor flat	2B 4P	FF single storey	73.36

4. Layout - Masterplan
Accommodation Schedule

60	P.2H.1	Private		Semi-detached house	28.4P	2 storey		87.00
61	P.2H.1	Private		Semi-detached house	28.4P	2 storey		87.00
62	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
63	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
64	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
65	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
66	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
67	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
68	P.3H.4	Private		Detached house	38.5P	2 storey, wide front		105.20
69	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
70	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
71	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
72	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
73	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
74	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
75	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
76	P.3H.8	Private		Semi-detached house	38.5P	2 storey		92.62
77	P.2H.1	Private		Semi-detached house	28.4P	2 storey		87.00
78	P.2H.1	Private		Semi-detached house	28.4P	2 storey		87.00
79	P.3H.9	Private		End-terraced house	38.5P	2 storey		97.43
80	P.2H.2	Private		Mid-terraced house	28.4P	2 storey		84.87
81	P.2H.2	Private		Mid-terraced house	28.4P	2 storey		84.87
82	P.3H.9	Private		End-terraced house	38.5P	2 storey		97.43
83	P.3H.9	Private		End-terraced house	38.5P	2 storey		97.43
84	P.2H.2	Private		Mid-terraced house	28.4P	2 storey		84.87
85	P.2H.2	Private		Mid-terraced house	28.4P	2 storey		84.87
86	P.3H.9	Private		End-terraced house	38.5P	2 storey		97.43
87	P.2H.1	Private		Semi-detached house	28.4P	2 storey		87.00
88	P.2H.1	Private		Semi-detached house	28.4P	2 storey		87.00

89	P.3H.10	Private	Detached house	38.5P	2 storey, wide front	106.66
90	P.4H.1	Private	Detached house	48.6P	2 storey, wide front	122.54

Tenure Summary					
Accommodation	Private	Affordable	Intermediate	Totals	
1 Bed Flat	2	6	2	10	
2 Bed Flat	6	6	2	14	
2 Bed House	20	8	0	28	
3 Bed House	33	2	2	37	
4 Bed House	1	0	0	1	
Totals	62	22	6	90 dwellings	

Tenure Summary with Overall % Calculation					
Accommodation	Private	Affordable	Intermediate	Totals	
1 Bed Flat	2	6	2	10 (11.1%)	
2 Bed Flat	6	6	2	14 (15.6%)	
2 Bed House	20	8	0	28 (31.1%)	
3 Bed House	33	2	2	37 (41.1%)	
4 Bed House	1	0	0	1 (1.1%)	
Totals	62 dwellings (68.9%)	22 dwellings (24.4%)	6 dwellings (6.7%)	90 dwellings (100%)	

Affordable & Intermediate Tenure % Calculation			
Accommodation	Affordable	Intermediate	
1 Bed Flat	6 (27.3%)	2 (33.3%)	
2 Bed Flat	6 (27.3%)	2 (33.3%)	
2 Bed House	8 (36.4%)	0	
3 Bed House	2 (9.0%)	2 (33.3%)	
4 Bed House	0	0	
Totals	22 dwellings (100%)	6 dwellings (100%)	

4. Layout - Housing Plot Types

Private Housing

The predominant plot layout type across the site are detached or semi detached houses with private gardens.

Each plot also provides dedicated on-plot parking, this features either in spaces to the front of the house or to the side.

Fronts of houses are facing onto the street which provides natural surveillance.

Pedestrian access is provided around the property to the rear private gardens, bin stores and cycle stores.

The orientation of the houses varies across the site and allows for a significant number of properties to benefit from south facing gardens where possible.

Intermediate Housing

The intermediate houses are located adjacent to the affordable housing and also to the south opposite the care home.

They feature semi detached properties with dedicated parking and private back gardens. They also have planted beds to the frontage. This provides a defensible space transition barrier between the public footpath and the ownership threshold.

Fronts of houses are facing onto the street which provides natural surveillance.

Pedestrian access is provided around the property to the rear private gardens, bin stores and cycle stores.

Affordable Housing

The affordable houses are located to the north boundary of the site adjacent to the care home. Typically they feature semi detached properties with dedicated parking and private back gardens.

Fronts of houses are facing onto the street which provides natural surveillance.

Pedestrian access is provided around the property to the rear private gardens, bin stores and cycle stores.

Flats

Each block of flats is located within a green landscaped area with a single main entrance from the street. Multiple shared public green spaces are located within the neighbourhood.

Parking is provided in an adjacent parking courtyards.

Bin storage is dedicated external fenced area adjacent to building.





Cycle storage for each flat is provided within the external fenced area adjacent to the building.



4. Layout - Housing


Typical House Types- 3 Bed House

The following pages illustrate four typical layouts for the affordable flats and houses

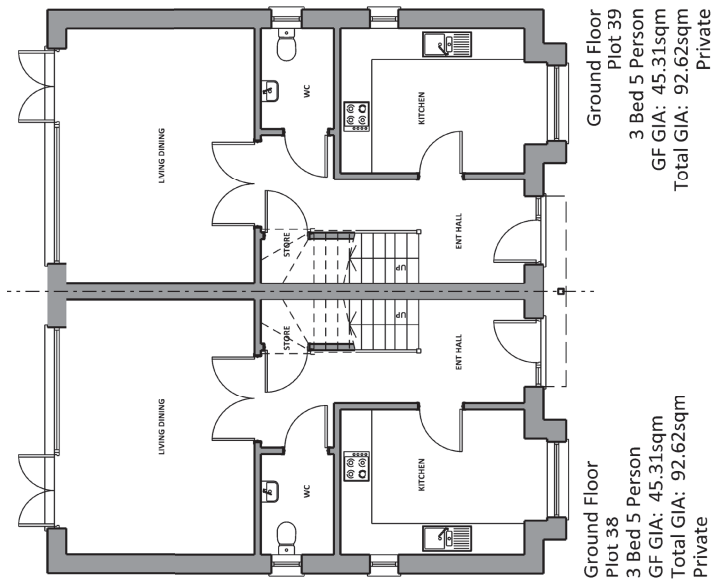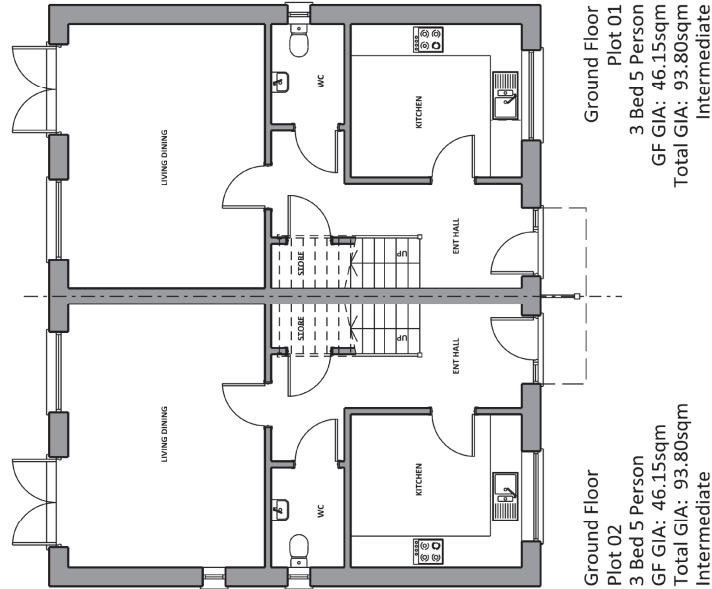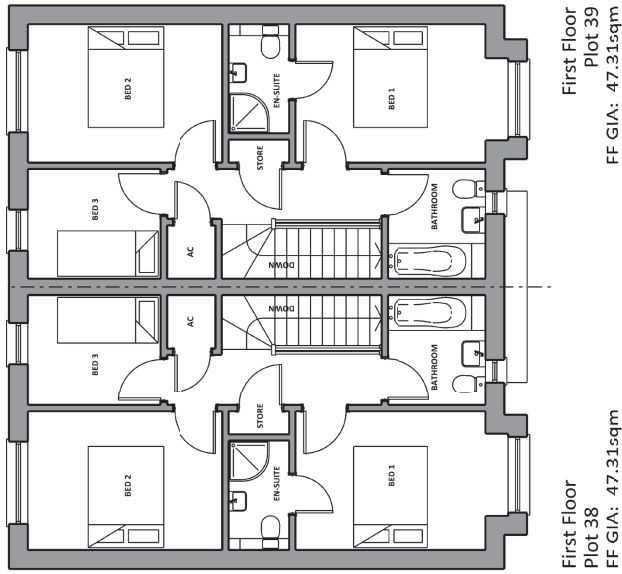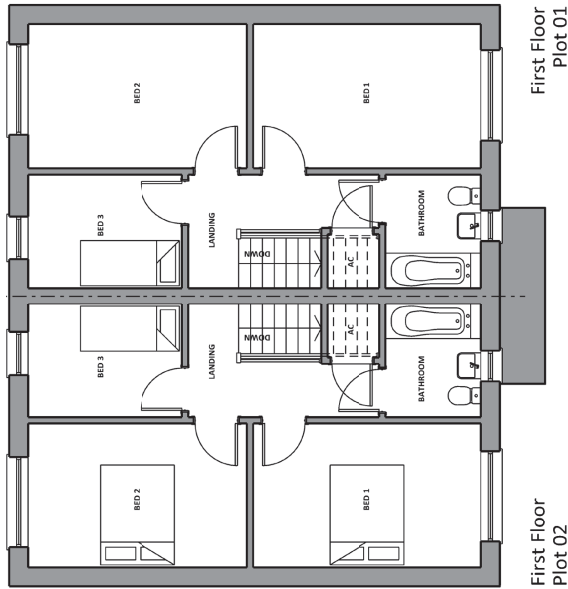


4. Layout - Housing


House Types- 2 Bed Flat

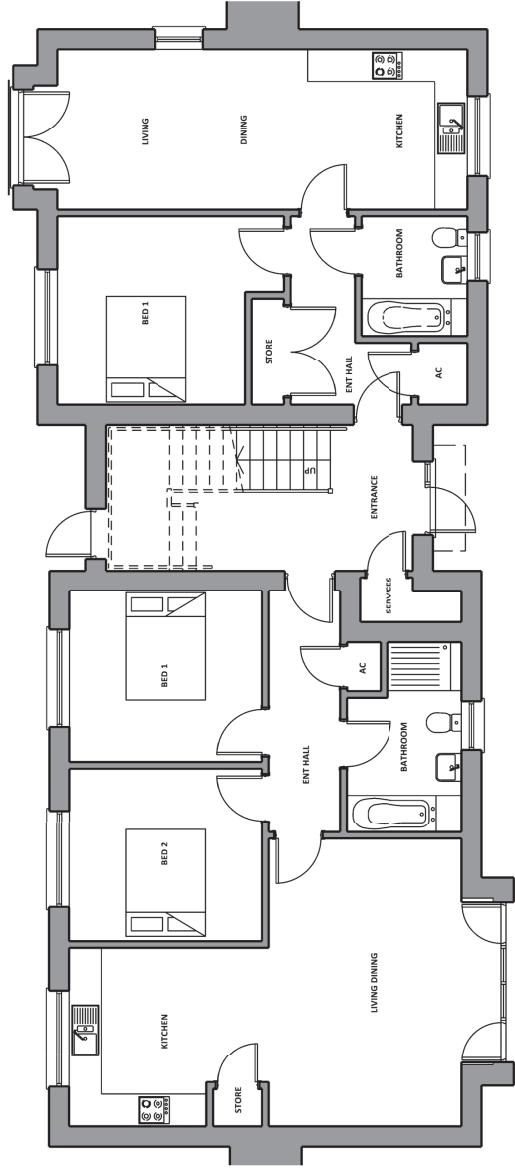

Ground Floor
Plot: 4
2 Bed 4 Person
GF GIA: 73.36sqm
Intermediate

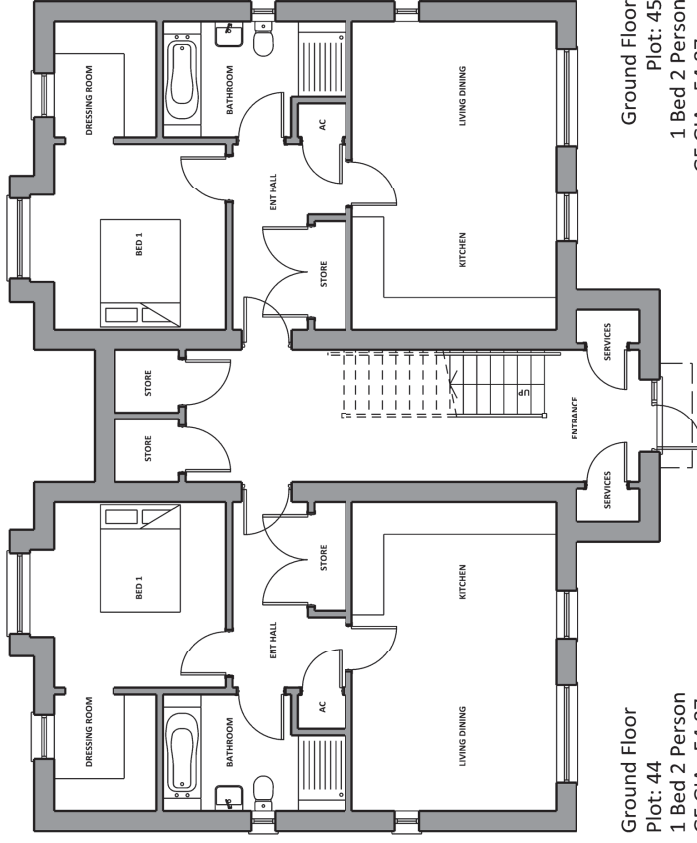

Ground Floor
Plot: 44
1 Bed 2 Person
GF GIA: 54.87sqm
Private

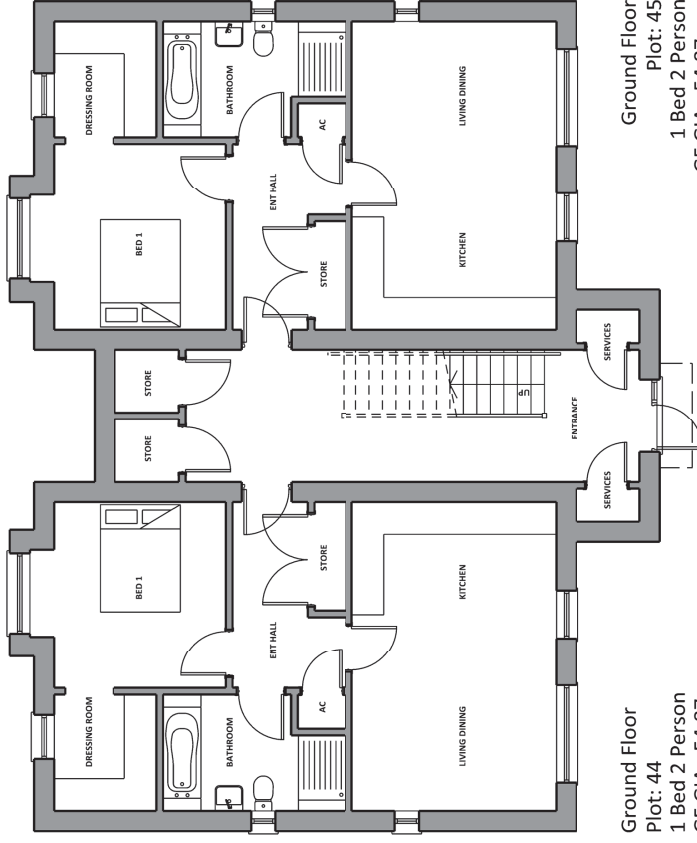

Ground Floor
Plot: 45
1 Bed 2 Person
GF GIA: 54.87sqm
Private

4. Layout- Care Home Site Strategy


The Care home is located adjacent to the site entrance and is set within a large landscaped area. It's inherent massing makes it suitable to act as a key identifying building when entering the neighbourhood.

The orientation of the home allows for most of the residents bedrooms to have views of green space, either the natural landscapes to the north, or the wetland gardens to the east.

An external terrace is located along the east elevation to allow for external seating with views of the gardens. Paths are provided to allow for access into a secure garden area, keeping residents safe on the site, away from the water, but also offering freedom to enjoy the external space and exercise.

The care home entrance faces south and addresses the main car park. The routes and sight lines are clear to help orientate visitors on arrival. Footways are connected into the wider network promoting sustainable travel to the home for visitors and staff.

Visitor and staff car parking is provided to the south west, while a designated delivery area is provided to the east, this separation of functions allows for the car park to remain. Both are easily accessible without bringing traffic into the rest of the residential development.



4. Layout- Care Home Layout

The care home has three key types of accommodation


- Residential clusters.
- Resident shared spaces.
- Support accommodation.

The building has two wings, over three levels, with a main central living or activity space on each floor. Each wing also has additional lounge and recreation space for residents. Support accommodation is primarily on the ground floor however stores, sluices and nurses stations are distributed around the home as required.


Each wing provides a cluster of rooms which are all self-supporting with dining, lounge, bathroom as well as the en suites in the bedrooms. There are six clusters in total, of varying sizes, allowing for flexibility in accommodation.

The layout provides the service area, including staff facilities, at the west end of the ground floor in close proximity to the servicing access.


The kitchen is located close to a lift that will take food to each floor to allow residents to eat within their clusters.

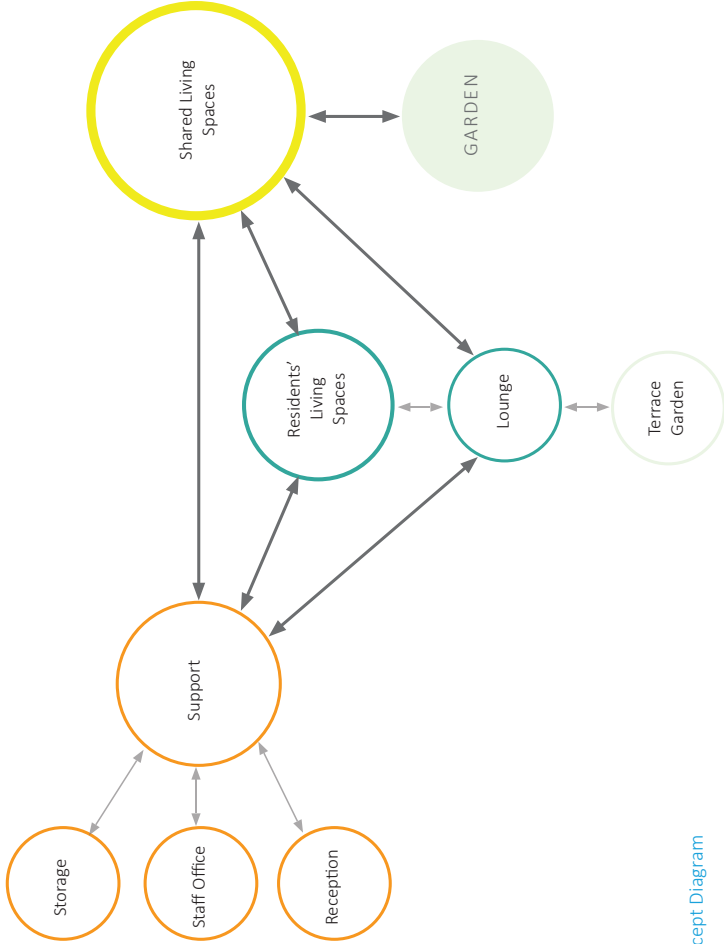

Concept Diagram

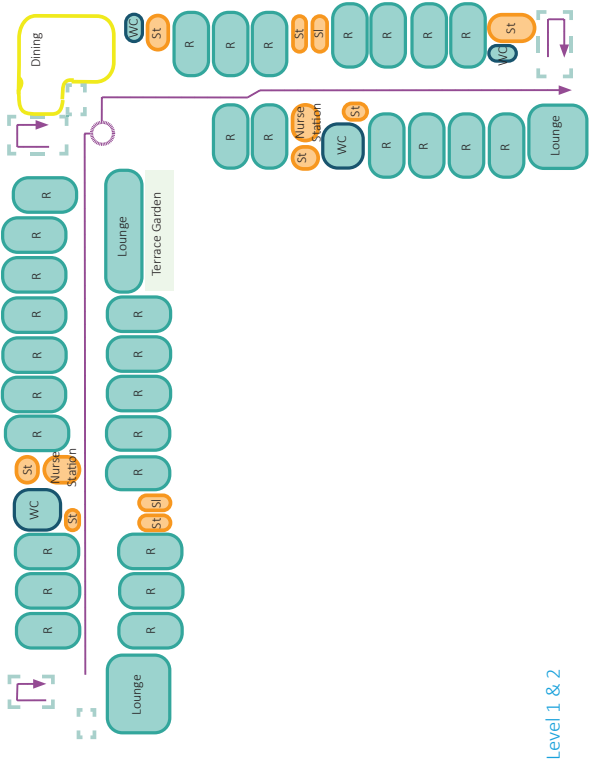


Level 1 & 2

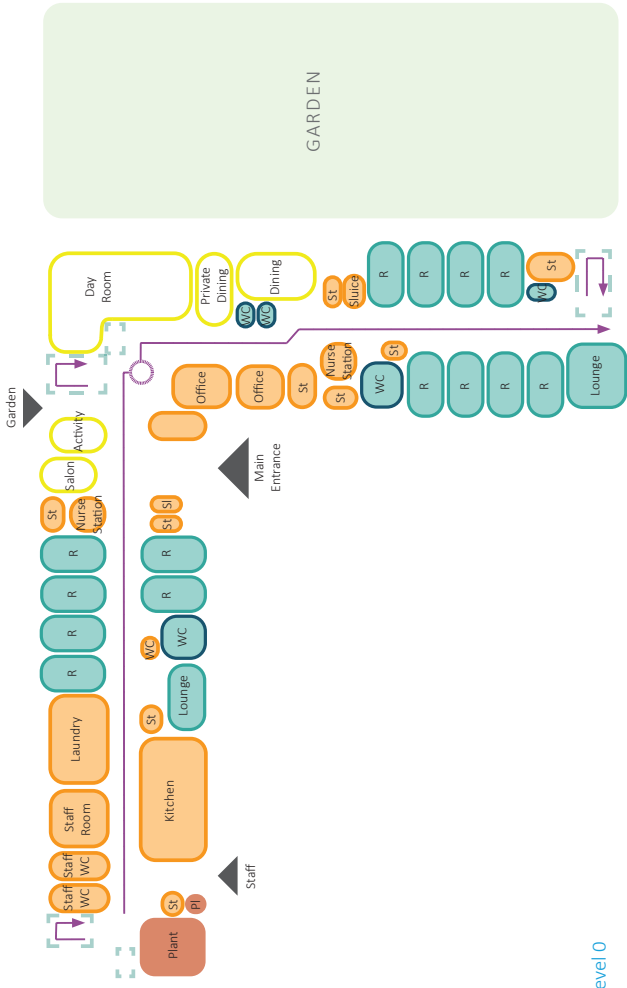

Level 0

4. Layout- Care Home Ground Floor Plan - Care Home

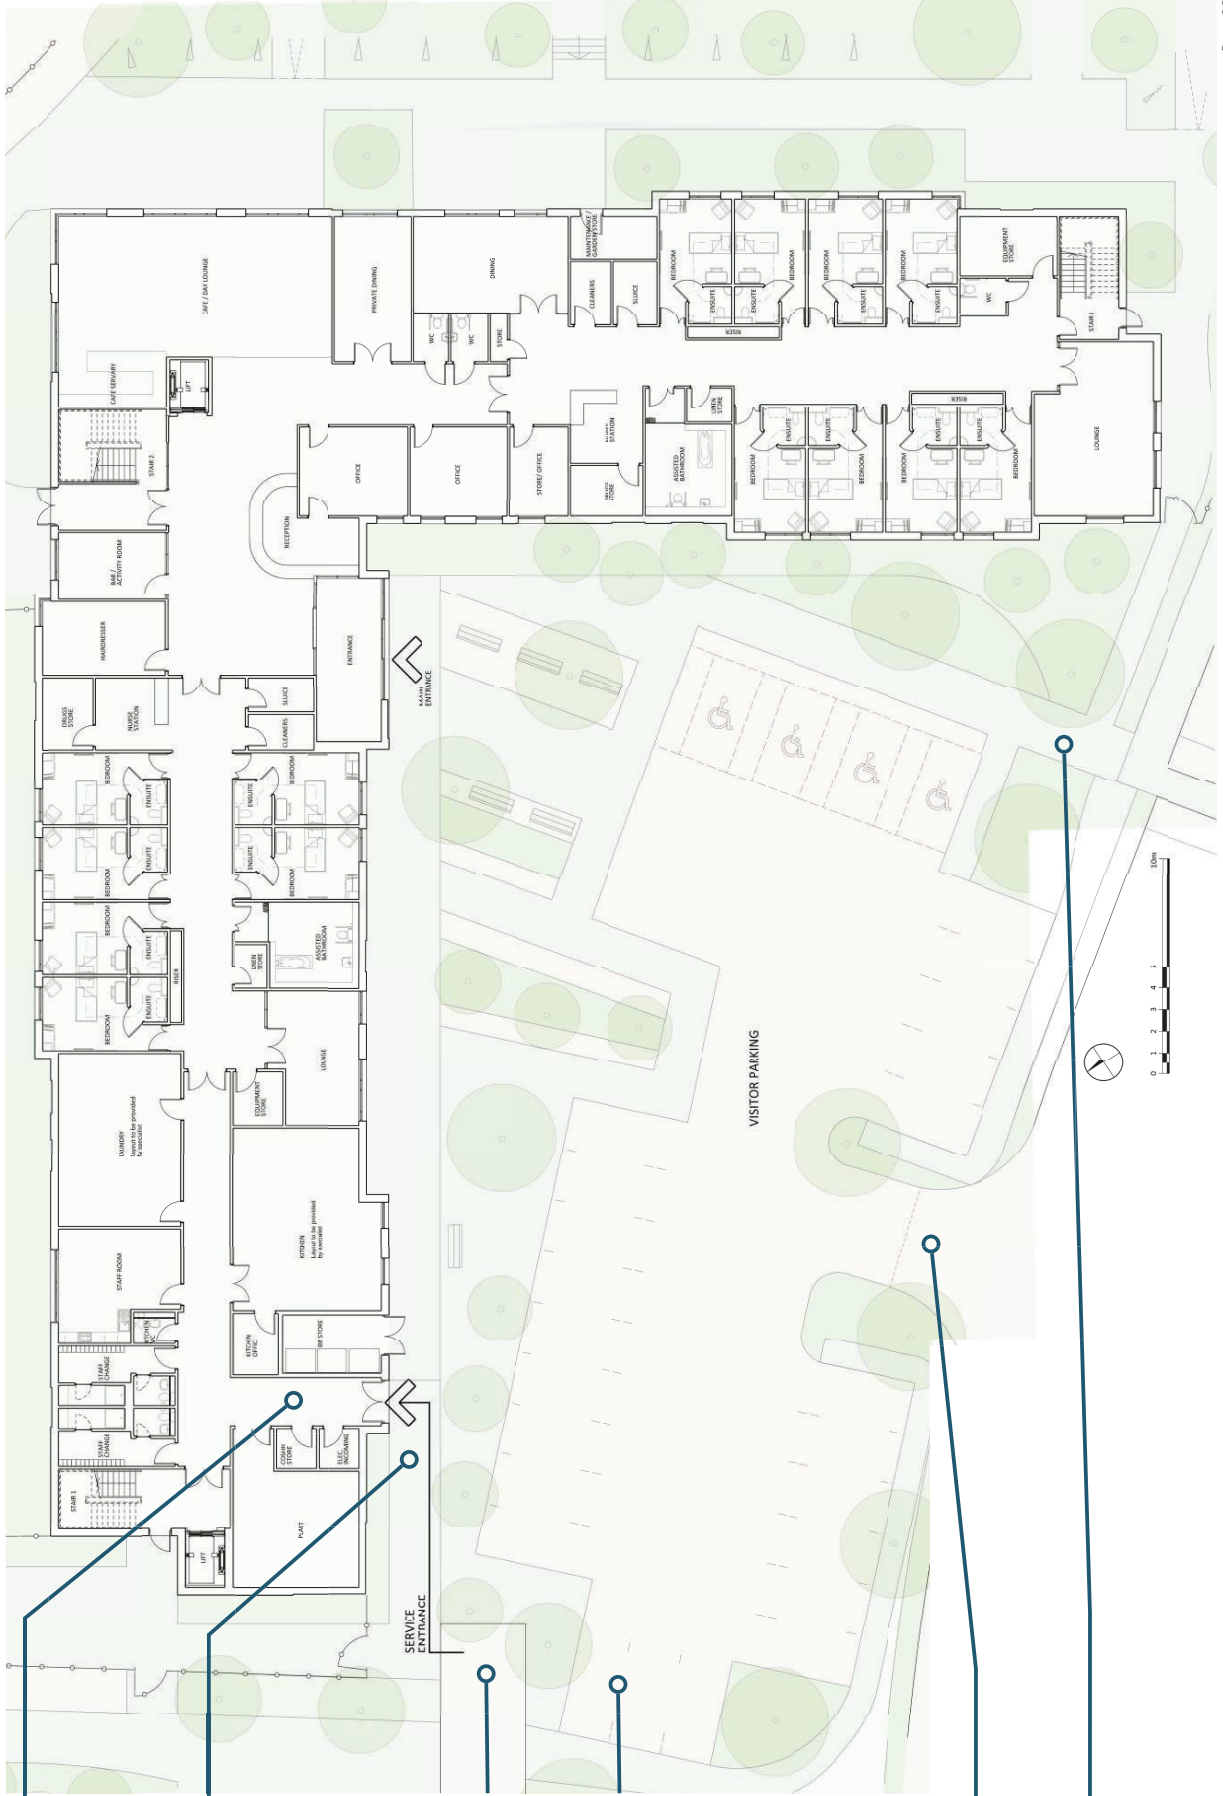

Staff access & operational functions located adjacent to the delivery bay

Footways aid circulation and keep pedestrians and vehicles separated.

Dedicated delivery/servicing bay

Parking set within landscaping

Vehicular access

Footways connect into wider ProW network



5. Access

Vehicle Access

Access Arrangements

Vehicular access to the development site will be via left in/left out junction onto the A259 from Brook Lane. A roundabout junction will be provided on Brook Lane (illustrated on drawing SPURST(BROOKLANE).1/10D), which has been approved through a reserved matters application (planning application reference A/83/18/RES) and will provide access to both this development and the proposed mixed-use development to the east of Brook Lane.

Pedestrian/cycle access will be provided via the continuation of the existing shared footway/cycleway adjacent the A259 at the Manor Retail Park. The development proposal also includes the provision of a new pedestrian and cycle bridge over the railway, which will provide a safer facility for pedestrians than the existing informal at grade crossing which forms part of Public Right of Way 2159.

Delivery and Servicing Arrangements


The development site benefits from 5m road widths throughout, providing sufficient width for delivery vehicle or refuse collection vehicle to safely pass a car. Turning heads are provided for refuse vehicles to turn within the development site, and bin stores are provided where appropriate.

Parking

Car and cycle parking for the development site is provided in accordance with Table 2.3 and Table 3.1 of the Arun District Council Parking Standards Supplementary Planning Document (dated January 2020).

Electric Vehicle Charging points will be provided in accordance with Table 2.2 of the Arun District Council Parking Standards.

Text provided by Mayer Brown

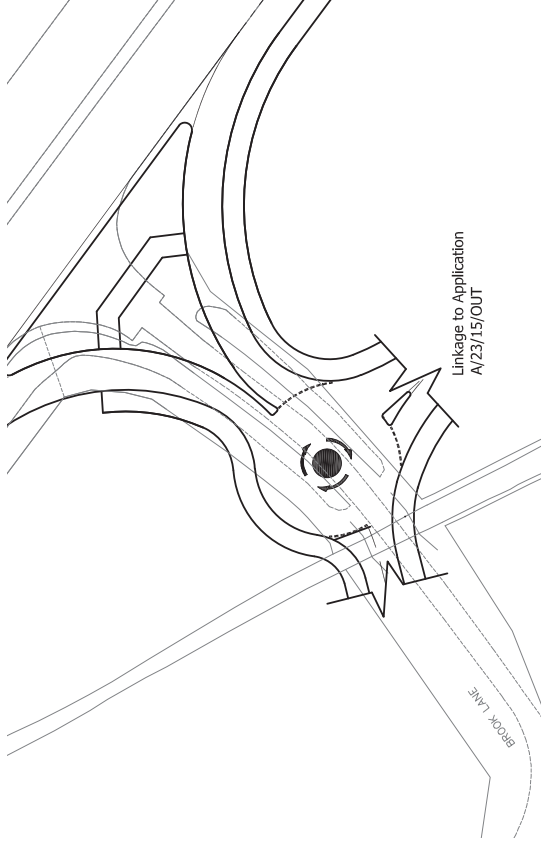

Reserved matters application layout A/83/18/RES



RMA layout incorporated into proposed masterplan

5. Access

Site Accessibility

These paragraphs explain how the proposals achieves access for all residents and visitors.

General access:

All vehicle access served by the main spine road. Generous pedestrian walkways are provided along the length of the road, connecting into the wider footway network and private paths to individual dwellings.

The site utilises and enhances the existing PROWs (Paths 2159 & 2160) to promote sustainable travel and improving the walkability of the scheme.

The site is carefully linked into the wider footway network via a new pedestrian bridge to south and footway connection to future developments to the east.

Care Home:

The care home is provided with dedicated parking with level access, including drop kerbs and dedicated walkways leading to the main entrance.

Externally, clear and level walkways within the secure gardens are provided to ensure residents are able to make use of the open space surrounding the home, while remaining safe, in line CQC requirements.

Internally, the layout reflects the design requirements of current CQC guidance and best practice, ensuring level thresholds are provided throughout, with care given to the selection of surface finishes to avoid causing distress and confusion to the residents.

Clear signage and colour variations help to orientate the residents when within the care home which also helps to avoid an institutional feel, reflecting a more domestic appearance.

Dwellings

All dwellings will have a level access from the adjacent road frontage and no stepped access is required on any plot through care design of the site levels.

All dwellings have provision for on-plot or allocated parking, ensuring a safe route from a resident's vehicle to their front door. Where unallocated parking is used, clearly defined pedestrian routes are provided, with crossings where necessary to nearby dwellings. Refuse and emergency vehicles can access all dwellings.

The level access to all dwellings is in line with the requirements of the national standards and the Building Regulations. These standards are continued internally. The dwellings will comply with all statutory regulations.

All residents can safely connect into the wide footpath and cycle route network along dedicated pedestrian routes. The proposals bring walking and cycle routes through the development, encouraging connectivity with the wider area.



6. Scale
Proposed Site Sections

The proposals are appropriate in scale for a residential development, taking references for scaling and spacial relationships from the surrounding developments.

All dwellings are over two storeys with pitched roofs but ridge and eaves lines vary to create a sense of identity and place. The subtle changes in level are used, where possible, to articulate different areas of the development.


Careful consideration has been given to the appearance and contribution of each

dwelling, to avoid an indistinguishable uniformity. However, as set out in the Appearance section, the material palette and fenestration style helps to create a sense of homogeneity and identity.

Building frontages are stepped to create different scales of public and private space, adding depth and perspective to the layout, and focus views and sight lines into the communal areas such as the central LAPs.

A full series of site sections is provided within the application.

Key showing section location

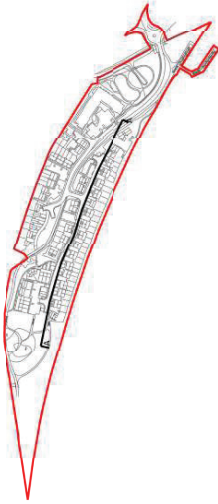

6. Scale
Proposed Site Sections

The increased changes in level running north-south are used to create greater distinction between plots. Responding to the changing levels allows for some variation in dwelling alteration, creating variety and varying expressions of scale, i.e. viewing gable ends as opposed to frontages, without changing the massing or suitability of the dwelling designs.

The care home is set over three floors in accordance with the outline consent, and the massing reflects its position at the gateway of the site. The scale of the home is a product of the requisite internal spaces and functions, ensuring the best quality internal environment for the residents.

The architectural language, fenestration patterns and material palette are consistent with the dwellings, giving the home a more domestic feel. This is further enhanced by the stepped eaves which help to break-up the massing while maintaining its hierarchical position within the site

Section HH shows how the care home is located in the lower areas of the site, helping to embed the home within the immediate landscaped gardens and ensuring it does not dominate the development setting.

