

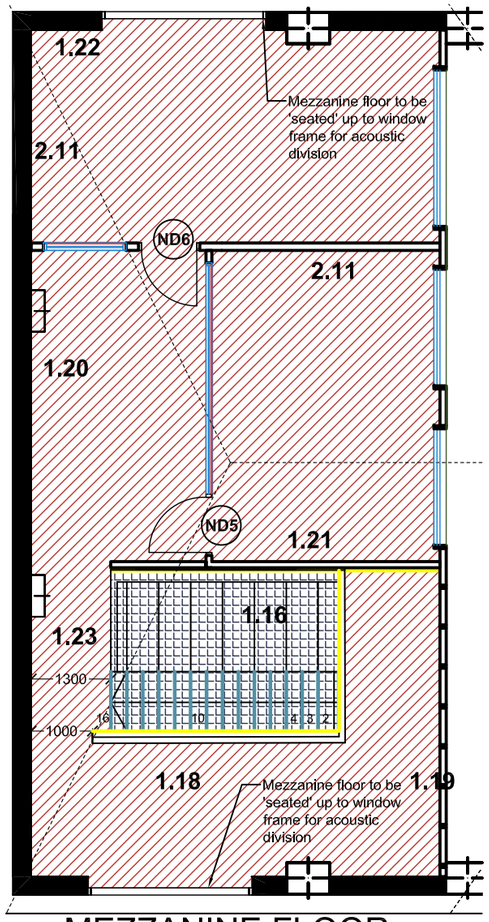


MEZZANINE FLOOR

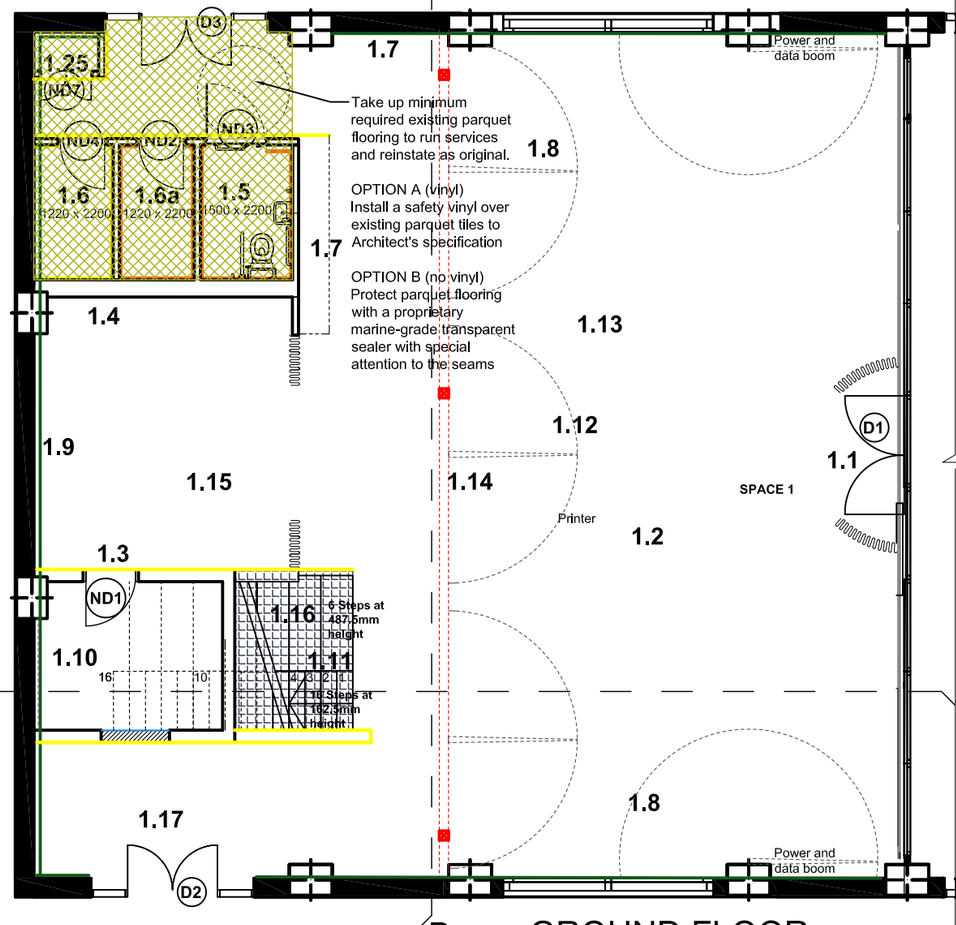

B GROUND FLOOR

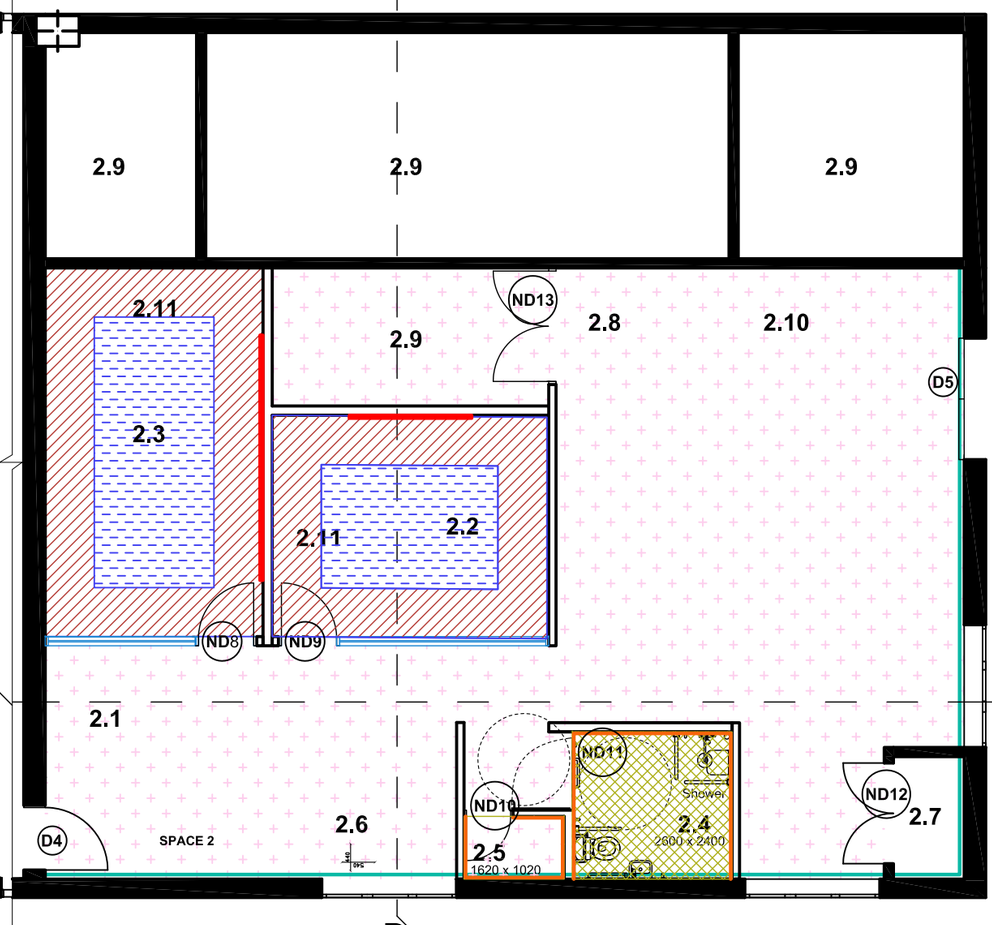

D

FLOOR FINISHES

- Plywood
- Safety vinyl
 Forbo Nairn Laguna - Mouse
- Cork/ Lino/ Carpet to be verified (extends under carpet)
- Loose Rug
- Industrial poured concrete look floor finish with clear sealant to floor
- Existing Parquet floor

Note: Existing Parquet flooring to be reviewed for additional treatments + finish.

DECORATIONS

All walls + existing ceilings painted white emulsion.
All woodwork White Eggshell

- Olive LRV. 29.53 tread stair nosings
- Existing matchboard to be protected Eggshell decorated paint finish
- Ceramic wall tiles 100mm x 100mm
- Plywood cladding
- Existing tiles to be protected
- Bulletin board + wipe broad panel with plywood frame

DOOR FINISHES SCHEDULE

D1	**Existing doors painted in Eggshell white**	ND1	**High grade birch wood door with lacquered ply veneer (Solid core), plywood door frame/ architrave**	ND12	**Standard solid door blank decorated Eggshell white**
D2		ND2		ND13	
D3		ND3			
D5		ND4			
		ND5			
D4	**Existing door painted in Eggshell white, corridor side colour to be confirmed**	ND6			
		ND7			
		ND8			
		ND9			
		ND10			
		ND11			

HANDLE
Rhodes Round Rose Lever
Matt Black

Note: All existing ironmongery to be retained where suitable, allow provision sum for new ironmongery to new doors

HEMINGWAYDESIGN

HemingwayDesign
15 Wembley Park Drive | Wembley | Middlesex | HA9 8HD
020 8903 1074
www.houseofhemingway.co.uk

Client: WSCC
Project: Cultural Hub
Drawing: Ground Floor and Mezzanine
Date: May 2018
Drawn: ER
Checked: LB
Scale: @ A3 1:100
Revision: C
Drawing no: 11

Revisions:
Revision A 17.05.2018
First issue
Revision B 21.05.2018
Costing issue
Revision C 26.05.2018
Bathroom flooring

General Notes

These concept drawings are for design intent purposes only. Contractor to:
- advise on all details and ensure stability and strength of construction throughout.
- provide setting out, check all dimensions on site and report any discrepancies to designer prior to construction.
- provide construction and manufacturing drawings for all bespoke items for approval by client.

All constructions and materials to comply with current building and fire regulations
All electrical works to comply with relevant codes and practice

CDM Health & Safety

Contractor to prepare all method statements and risk assessments to allow safe access to fixtures and fittings for the purposes of assembly, disassembly, moving and routine maintenance.

ARUN DISTRICT COUNCIL BR/193/18/L