

The Landings, Ford Airfield

Phase RM4 (South)

Planning Statement
RM4_02.C
January 2025



Vistry Group

The Landings, Ford Airfield

Infrastructure Reserved Matters

RM1 (North) Reserved Matters

RM4 (South) Reserved Matters

Planning Statement_RevB

Vistry Homes Limited

January 2025

tor
&CO

torandco.com



Issue: B	Prepared by Harvey Wingfield MRTPI
Reference 180641	Signature 
This document is issued for	Date January 2025
☐ Information ☐ Approval	Checked by Gardiner Hanson
☐ Comment ☒ Submission	Signature 
Comments: Jan 2025 - Amended Submission Version (Rev B) to update Affordable Housing Tenure Plans	Date January 2025
	Authorised by Gardiner Hanson
	Signature 
	Date January 2025
	Please return by

© tor&co 2025. All rights reserved

No part of this document may be reproduced in any form or stored in a retrieval system without the prior written consent of the copyright holder.

All figures (unless otherwise stated) © tor&co 2024

©Crown Copyright and database rights 2022 OS Licence no. AC0000649686

Contains OS data © Crown copyright and database right 2022. Licensed under the Open Government Licence v3.0.

Aerial imagery © Getmapping plc

Table of Contents

1.0	Introduction	1
	Supporting Documents	2
2.0	Site Context	5
	Wider Site Description	5
	Infrastructure RM (IRM) Site Description	5
	RM1 (North) Site Description	6
	RM4 (South) Site Description	7
3.0	Planning History	9
4.0	Consultation	11
	Public Consultation	11
	Consultation with ADC	12
	Consultation with WSCC	15
	Conclusions	17
5.0	The Proposals	18
	Descriptions of Development	18
	Quantum of Development & Affordable Housing	18
	Layout, Scale and Appearance	20
	Landscape & Public Open Space	20
	Transport	20
	Sustainability and Energy	21
	Surface Water Drainage	21
	Biodiversity	21
6.0	Planning Policy	22
	National Policy & Guidance	22
	Local Policy & Guidance	23
	Other Material Considerations	26
	Emerging Local Plan	26
	Emerging Neighbourhood Plan	26
	Housing Land Supply & Housing Delivery Test	27
7.0	Planning Assessment	28
	Principle of Development	28
	Housing Delivery & Affordable Housing Statement	28
	Layout	35
	Scale	40
	Plot Layout, Setbacks & Separation Distances	42
	Appearance	44

NDSS / Internal layouts	45
Transport & Access	46
Delivery & Servicing (Waste)	53
Drainage and Flood Risk	54
Public Open Space & Landscape	57
Play Space.....	59
Trees.....	62
Ecology & Biodiversity	63
Lighting	65
Energy & Sustainability.....	66
Noise.....	67
Waste infrastructure.....	68
Heritage	70
8.0 Compliance with Outline Planning Permission	72
Outline planning conditions.....	72
S106 legal agreement.....	76
9.0 Conclusions	78

Appendix I – Indicative S106 Affordable Housing Tenure Distribution Plans

1.0 Introduction

- 1.1 This planning statement has been prepared by tor&co on behalf of the applicants Vistry Homes Limited and Countryside Abri Ford North LLP (hereafter referred to as 'the applicants') to support three standalone reserved matters applications pursuant to condition 1 of outline planning permission F/4/20/OUT at Land at Ford Airfield, Ford (hereafter referred to as 'the site').
- 1.2 Outline planning permission (ref. F/4/20/OUT) was originally granted on 14th July 2023 for the following development:

Outline planning application (with all matters reserved except for access) for the development of up to 1,500 dwellings (Use Class C3), 60-bed care home (Use Class C2), up to 9,000 sqm of employment floorspace (Use Classes B1), local centre of up to 2,350 sqm including up to 900 sqm retail / commercial (Use Classes A1-A5) and 1,450 sqm community / leisure floorspace (Use Classes D1-D2), land for a two-form entry primary school (Use Class D1), public open space, allotments, new sports pitches and associated facilities, drainage, parking and associated access, infrastructure, landscape, ancillary and site preparation works, including demolition of existing buildings and part removal of existing runway hardstanding. This application affects a Public Right of Way. This application is the subject of an Environmental Statement. This application may affect the setting of a Listed Building. This application falls within CIL Zone 1 - Zero Rated.

- 1.3 The outline permission was approved with all matters reserved except access and was supported by a s.106 legal agreement.
- 1.4 The description of development for each reserved matter phase is as follows:

Infrastructure RM (IRM)

Approval of reserved matters (layout, scale, appearance and landscaping) following outline consent F/4/20/OUT for Infrastructure RM, for the provision of a primary spine road and associated secondary road junctions, pavement, footpaths, cycle infrastructure and bus stops; site wide drainage infrastructure, including foul pumping stations, foul sewer infrastructure, SUDS basins, SUDS swales, surface water infrastructure; acoustic fencing; public open space, including landscape details, play areas, footpaths & associated works.

RM1 (North)

Approval of reserved matters (layout, scale, appearance and landscaping) following outline consent F/4/20/OUT for phase RM1 (North), for the erection of 341 no. residential dwellings plus associated roads, infrastructure, parking, landscaping, and associated works.

RM4 (South)

Approval of reserved matters (layout, scale, appearance and landscaping) following outline consent F/4/20/OUT for phase RM4 (South), for the erection of 357 no. residential dwellings plus associated roads, infrastructure, parking, landscaping, open space & play areas, and associated works.

- 1.5 The reserved matters applications are submitted alongside details in accordance with the following outline planning conditions specific to each phase:
- Condition 18 (Ecological Protection and Enhancement Plan)
 - Condition 20 (Layout, Scale, Appearance and Landscaping Details)
 - Condition 21 (Landscape Details)
 - Condition 25 (Noise Impacts)
 - Condition 26 (Decentralised and Renewable or Low-Carbon Energy)
- 1.6 This statement details the proposed developments, explains the site context, pre-application consultation, the applicable development plan framework, and assesses the proposals against applicable planning policies. This statement should be read alongside the submitted application forms and accompanying drawings.

Supporting Documents

- 1.7 The reserved matters applications are also accompanied by the following technical reports and information:
- Proposed Plans
 - Design and Access Statement / Code Compliance Statement
 - Landscape Details
 - Surface & Foul Drainage Technical Note
 - Transport Technical Note & Travel Plan
 - Noise Impact Assessment
 - Ecological Protection and Enhancement Plan
 - Arboricultural Impact Assessment
 - Energy & Sustainability Strategy
 - Heritage Statement
 - Waste Infrastructure Technical Note
 - Statement of Community Involvement
- 1.8 This above list of supporting documents has been previously agreed with the Arun District Council through pre-application engagement as part of a Planning Performance Agreement.

Amended Resubmission

- 1.9 The applicant originally submitted the three above referenced Reserved Matters applications to Arun District Council (ADC) in September 2024:
- IRM – ref. F/14/24/RES
 - RM1 – ref. F/15/24/RES

- RM4 – ref. F/16/24/RES

- 1.10 Responses from various statutory consultees have been reviewed and have resulted in various amendments to each Reserved Matter application, which is summarised and detailed within a standalone consultation response tracker prepared to accompany resubmission documents.
- 1.11 This Planning Statement has been revised to align with the updated submission amendments, which are summarised below:

IRM (Infrastructure)

- Redlines – amended to include St. Mary’s Meadow and Horsemere Green Lane public open space;
- Pump Stations – relocated within St. Mary’s Meadow and Horsemere Green Lane to address access and high groundwater level issues;
- Spine Road – redlines to include junction turning heads within RM1 and RM4 parcels, but relocated to rear of pavement within remaining parts of the site to allow future junction location flexibility;
- Spine Road Drainage Swales – street trees removed from within spine road drainage swales and reprofiled to enable street trees to be relocated;
- Spine Road Pump Station – additional conifer/woodland planting to rear of pump station within RM2;
- Spine Road Junctions – amended pedestrian crossing design as spine road passes the non-designated runway corridor and heritage canal alignment;
- Canal Pathway – 2.0m footpath incorporated along northern boundary of Ford Industrial Estate (to connect with future heritage canal alignment in RM2);
- Ryebank Park – introduction of 3.0m shared pedestrian/cycle route and reprofiling and setting back of SuDS basin from RM4 boundary;
- Arun Way – amended junction/table and amended redline to include secondary junction/bridleway crossing; and
- Landings Green – SuDS basin reprofiling to slightly increase capacity and additional landscape screening planting along northern boundary of the adjacent Grundon Waste Transfer facility.

RM1 (North)

- Redlines – St. Mary’s Meadow relocated into IRM phase to allow pump station relocation / incorporation of southern tertiary road along Arun Way northern boundary;
- St. Mary’s Meadow Edge – various amendments to road layout along western edges to enable pump station relocation and the removal of emergency access routes which were replaced with mews street typologies;
- Road Layouts – additional tertiary junctions west of spine road incorporated and realignment of tertiary street network east of spine road;

- Block layouts and house types – various minor amends to block layouts and house types to allow for amended road layout and to increase separation distances where required; Rear Gardens – review and rationalisation of rear garden boundaries to increase separation distances and avoid irregular garden shapes where required;
- Unit Mix – slight reduction in the number of 2B and 4B dwellings and minor increase in 1B and 3B dwellings resulting in 1 x additional unit (341 x total);
- Design – various amendments to elevational treatments of dwellings and flats to address Design Officer comments;
- Minor landscape amendments related to street tree locations and to incorporate street lighting on secondary road network;
- Ecology – increase in number of bird/bat boxes and additional ecological mitigation measures associated with amphibian hibernacula, hedgehog highways and knotweed removal; and
- Energy – change from air source heat pump to more efficient ground source heat pump strategy.

RM4 (South)

- Redlines – amended redline to incorporate part of Ryebank Park / Horsemere Green Lane public open space into IRM to enable relocation of pumping station within Ryebank Park
- Block layouts and house types – various minor amends to block layouts and house types to increase separation distances where required. Rear Gardens – review and rationalisation of rear garden boundaries to increase separation distances and avoid irregular garden shapes where required;
- Unit Mix – Slight reduction in the number of 3B dwellings and a single 4B house to allow for a minor increase in 2B dwellings;
- Design – various amendments to elevational treatments of dwellings and flats to address Design Officer comments;
- Minor landscape amendments related to street tree locations and to incorporate street lighting on secondary road network;
- Ecology – increase in number of bird/bat boxes and additional ecological mitigation measures associated with amphibian hibernacula, hedgehog highways and knotweed removal; and
- Energy – change from air source heat pump to more efficient ground source heat pump strategy.

2.0 Site Context

Wider Site Description

- 2.1 The wider outline site, which totals 86.83ha in area, is located between the villages of Yapton, Ford and Climping. It is approximately 3km to the northwest of Littlehampton town centre and 4km southwest of Arundel town centre. The South Downs National Park boundary lies approximately 2km to the north of the site.
- 2.2 The outline site is approximately 0.7km south of Ford railway station and 0.4km west of the River Arun.
- 2.3 The outline site is bound by Ford Lane to the north; the former Ford Airfield runway, plus industrial and agricultural uses to the east; Yapton Road and Horsemere Green Lane to the south; and Rollaston Park and agricultural land to the west.
- 2.4 Much of the outline brownfield site is currently in agricultural use, however, a large proportion of the concrete runways of the former Ford Airfield remain within the southern part of the site. The southern and eastern runways, which adjoin the application site, are currently utilised for car boot sales, a farmers' market and market uses on Thursdays, Saturdays and Sundays. Additionally, there are a few vacant and disused buildings located across the site, with their demolition being secured via the outline permission.
- 2.5 The outline site is also adjoined by several industrial and employment uses, with Ford Industrial Estate located to the west, Rudfield Industrial Estate to the east and various employment uses located to the north of the site along Ford Lane. Additionally, a wastewater treatment works (operated by Southern Water), a waste transfer station (operated by Grundon) and a recycling facility (operated by Viridor) are also located east of the site all of which are accessed from Ford Road.
- 2.6 Along the eastern edge at the central part of the site, there is the 'Flying Fortress' (indoor children's play area) and the 'Arun Sports Arena' (indoor five-a-side football facility). The access to these facilities is from Ford Road.
- 2.7 The whole of the site lies within the Parish of Ford. It adjoins the Climping Parish boundary at Horsemere Green Lane and Yapton Road. It touches the Yapton Parish boundary at its western-most point, along the alignment of the former Portsmouth and Arundel Canal.
- 2.8 There are several Public Rights of Way (PROW) which pass through the site (Path Numbers 363, 363_1, 366, 200_3 and 175). These respectively provide footpath connections between Yapton and Ford, and between Rollaston Park and Ford Road (via Rudfield Industrial Estate).

Infrastructure RM (IRM) Site Description

- 2.9 The IRM parcel totals a site area of 20.38ha. The redline boundary for the IRM application is shown below in **Figure 1**.

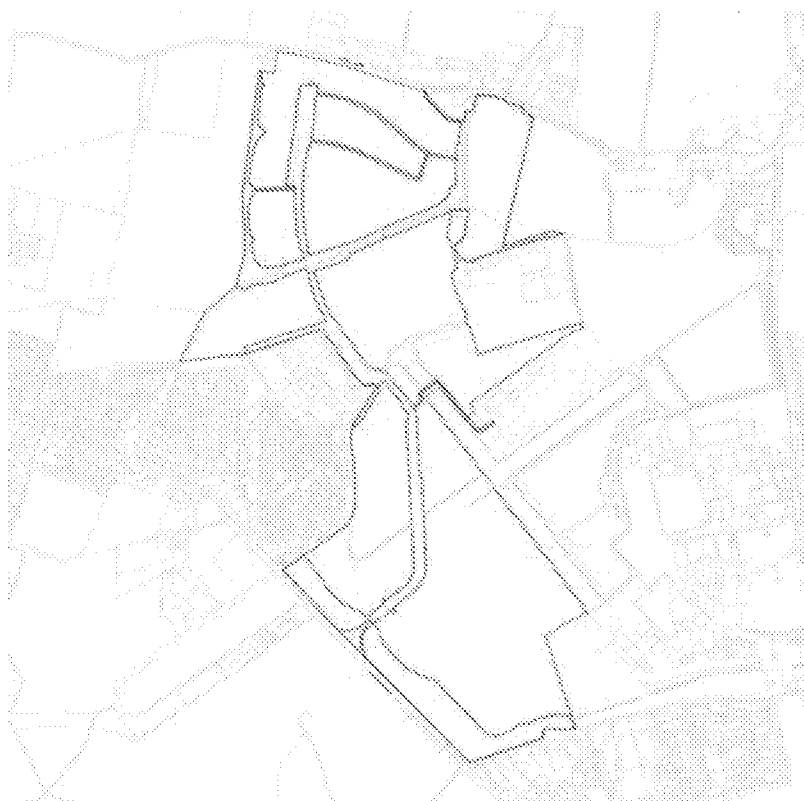


Figure 1 - IRM Site Location Plan

- 2.10 The IRM parcel comprises predominantly agricultural land but also includes a small portion of the existing Ford Airfield runway in the south of the site, and some areas of mature vegetation (predominantly category B and C trees) along Arun Way in the northern and northeastern parts of the site.

RM1 (North) Site Description

- 2.11 RM1 (North) totals 11.42ha in area and is located in the north-west corner of the site. The redline boundary for the RM1 application is shown below in **Figure 2**.

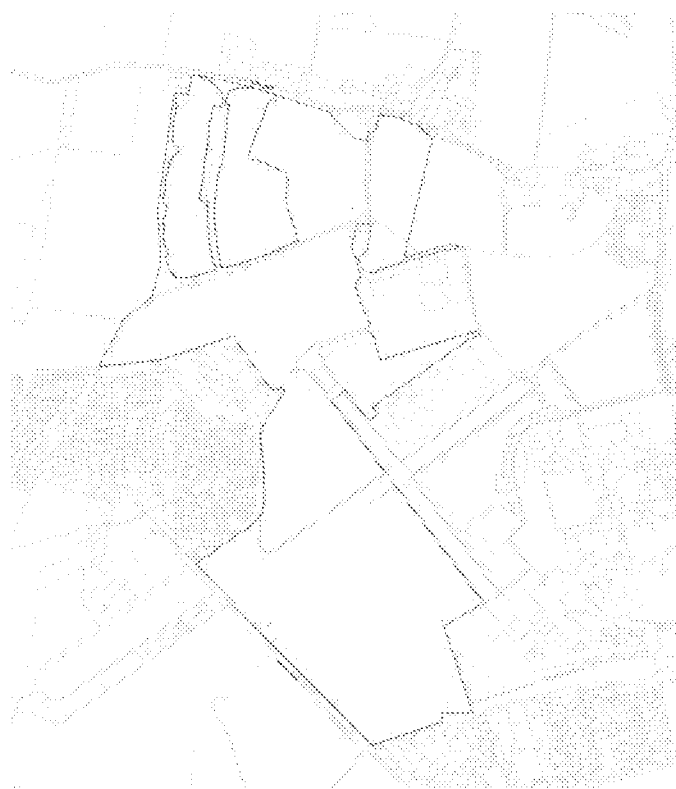


Figure 2 - RM1 Site Location Plan

- 2.12 The RM1 parcel currently comprises agricultural land and is partially bound to the north by Ford Lane and Peregrine House and Arun Way (PROW 363) to the south. The RM1 parcel is also intersected by the IRM redline where the northern most part of the primary spine road connects through to Ford Lane.
- 2.13 Beyond the primarily agricultural use of the land, parts of the former highway works depot and the surrounding category B tree group (G1006 & G1041) are located within the RM1 parcel.

RM4 (South) Site Description

- 2.14 RM4 (South) totals 17.96ha in area and is located in the south-east corner of the outline site. The redline boundary for the RM4 application is shown below in **Figure 3**.

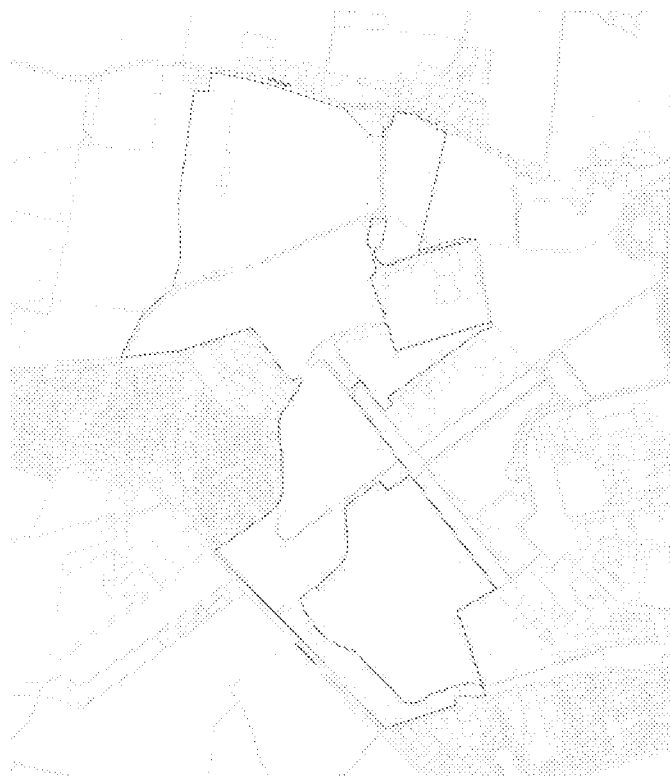


Figure 3 - RM4 Site Location Plan

- 2.15 The RM4 parcel currently comprises predominantly agricultural land but includes part of the former Ford Airfield runway in the northern corner of the parcel. The parcel is bounded by the south-east segment of the Ford Airfield runway, Horsemere Green Lane to the south-east, the future Ryebank Park and associated SUDS basins within Ryebank Park and by the primary spine road to the west. PROW 175 also crosses through the southern portion of the RM4 parcel.

3.0 Planning History

- 3.1 Outline planning permission (ref. F/4/20/OUT) was granted on 14th July 2023 for the following development:

Outline planning application (with all matters reserved except for access) for the development of up to 1,500 dwellings (Use Class C3), 60-bed care home (Use Class C2), up to 9,000 sqm of employment floorspace (Use Classes B1), local centre of up to 2,350 sqm including up to 900 sqm retail / commercial (Use Classes A1-A5) and 1,450 sqm community / leisure floorspace (Use Classes D1-D2), land for a two-form entry primary school (Use Class D1), public open space, allotments, new sports pitches and associated facilities, drainage, parking and associated access, infrastructure, landscape, ancillary and site preparation works, including demolition of existing buildings and part removal of existing runway hardstanding. This application affects a Public Right of Way. This application is the subject of an Environmental Statement. This application may affect the setting of a Listed Building. This application falls within CIL Zone 1 - Zero Rated.

- 3.2 Condition 4 of the outline permission secured a number of approved parameter plans which all future reserved matters applications would need to be submitted in accordance with. The approved parameter plans are provided below in **Figure 4**:



Figure 4.A. Outline Application Parameter Plans (by Barton Williams)

Figure 4 - Outline Parameter Plans

- 3.3 Prior to the submission of any reserved matters application(s), Condition 7 required the submission and approval of a site-wide Design Code (excluding the employment land) which sets out and establishes how the site-wide development should come forward. The Design Guide provides further detail in relation to:
- How the development responds to local character
 - The character areas, street hierarchy, building typologies, key buildings, the approach to car parking and electric vehicle charging points, character of green infrastructure and structural planting, street trees, street furniture, external lighting and treatment of the public realm, public rights of way and pedestrian/cycle/equestrian connections.
 - The local centre
 - The approach to public art
 - The integration of drainage infrastructure into the public realm and green infrastructure
 - How the above-ground utilities infrastructure will be integrated into the street
 - Provision of interpretive material and a heritage themed walk along the route of the former western arm of the runway.
- 3.4 The Design Code has now been approved by Arun District Council (ref. F/10/24/DOC). And was prepared in consultation with the local community and Arun and West Sussex County Council officers and provided further details as how the site-wide development would come forward in accordance with Condition 4 (approved parameter plans), the outline Masterplan Document (July 2021), and the Arun Design Guide SPD.

4.0 Consultation

- 4.1 The reserved matters applications have been subject to a range of consultation as part of a Planning Performance Agreement prior to its formal submission to Arun District Council (ADC) as the local planning authority. This in addition to the earlier engagement that was undertaken to inform the outline planning application and its associated framework masterplan (ref: F/4/20/OUT).
- 4.2 Pre-submission engagement has also been undertaken with West Sussex County Council (WSCC) as highway and drainage authority, along with public engagement events with local residents. We summarise the pre-application engagement below.

Public Consultation

- 4.3 A public exhibition was held on 1st and 2nd May 2024, which provided residents and interested parties with an opportunity to view and comment on the initial proposals for The Landings. The exhibition was held at Edgcumbe Tea & Coffee Co on Ford Lane to the north of the site and further details are provided within the submitted Statement of Community Involvement (document references: RM1_10.A and RM4_10.A) prepared by SEC Newgate.
- 4.4 Following the public consultation, 49 pieces of feedback were received, including a mixture of physical feedback forms sent via the Freepost address, responses via the project website and project email.
- 4.5 Key feedback from attendees in relation to the IRM, RM1 and RM4 applications has been collated into the following key themes:
- Connectivity: there is a strong desire for increased cycle paths and footpaths that link to routes to the sea. Improved connectivity for cyclists and pedestrians is essential.
 - Natural environment and open spaces: 77% of respondents to the engagement survey supported retention of the existing hedgerows and planting around the edges of the site.
 - Community projects and art installations: there is support for initiating community projects that include the installation of art, sculptures, cycle/play trails, and landscape elements that reflect the area's history.
 - Types of housing: respondents also provided general comments on the types of housing that might be delivered on the site, with suggestions that there is a need for more cottages and affordable housing. Concerns were raised about the appearance of roof tiles and the preference for lower roof pitches to maintain a smaller scale. Detached garages were seen as a waste of space and should be integrated into homes.
 - Safety and maintenance of footpaths: creating and maintaining public footpaths to link with the existing network between villages is crucial. With the population set to increase, introducing a footpath or pavement to Ford Lane is particularly important to address current and future safety issues.

- Design: respondents indicated that they did not want the proposals to introduce new building materials, including vibrant terracotta to the southern neighbourhood, with 40% disliking this element and only 11% liking it.
- Character areas: 48% of respondents liked the proposal for the southern neighbourhood to have a semi-rural character, compared with 22% who disliked this approach. The element of the northern neighbourhood that the public responded particularly strongly to was the proposal to maintain a lower density around the edge to help transition into the countryside (48% liked).

Consultation with ADC

Design Code Pre-application Engagement

4.6 A series of pre-application meetings were held with ADC officers and WSCC officers in relation to both the Design Code and subsequently the separate reserved matters applications. The timeline of these meetings is set out below:

- 15th February 2024 - Design Code Workshop 1
- 21st March 2024 - Design Code Workshop 2
- 11th April 2024 - Design Code Workshop 3
- 3rd May 2024 - Design Code Workshop 4
- 19th July 2024 – RM Pre-application meeting

4.7 In addition, the draft Design Code was presented and discussed with members of the Ford, Yapton and Climping Advisory Group on the 30th April 2024.

Reserved Matters Pre-application Engagement

4.8 The project team met with ADC officers on 19th July 2024, following the submission of pre-application proposals for RM1, RM4 and the Infrastructure RM. The key feedback from this meeting was as follows:

RM1 (North):

- Dwelling Mix - Currently showing a higher proportion of 3, 4, and 5-bedroom units compared to the Councils Strategic Housing Market Assessment (SHMA) but noted typically larger house types towards edge of site and smaller units towards local centre as being appropriate strategy. The phasing strategy should reference how site-wide unit mix in future phases will meet identified housing need.
- Ford Lane Character Area – Suggestion that a wider variety in the ridge heights is required to help the overall appearance and break up the roof line. The two indicative elevations shown for this area were both considered acceptable and would be in accordance with the proposed character area. Further details of materials and height will be required at RM stage.
- St Marys Meadow Character Area – Suggestions that greater variety in the ridge heights and roof forms should be explored to help the overall appearance and break up the roof line. Advice that some particular plots, and corner plots,

should include side or bay windows to improve passive surveillance along pedestrian pathways.

- Arun Way and Landings Green Character Area – Design Code specifies use of white brick, white render and flint but these materials are not prominent in this area. Some suggestions to reduce ridge heights compared to dormers or that by adopting a pitched roof on the dormers could alleviate this.
- Apartments – Need to be bespoke and in keeping with the Design Code character areas parameters in which they are located.
- Density – Officers noted some deviations from the ADC Design Guide regarding set back distances and garden depths which needed to be further reviewed.
- On-street Parking – There were some long runs of visitor parking along key green infrastructure routes and streets, a lack of planting and the quantum of parking visible together should be reviewed to avoid car-dominated street scenes.
- Rear Parking Courts – proposals contained a few rear parking courts which did not have overlooking or appropriate pedestrian/vehicular routes, also lacked soft landscaping. Needs to be further reviewed.
- Garden Depths and Design – Irregular garden shapes should be avoided where possible. Irregular gardens should be measured against shortest distance from rear facing elevation to establish rear garden depths. Planting not to be shown in rear gardens or form part of and biodiversity enhancements given private spaces.
- Parking Quantum – Officers noted a lower quantum of parking against ADC Parking Standards, but due to the proximity of services and sustainable transport options, could be acceptable subject to justification for any non-compliance being provided.
- Play Provision – In future reserved matters applications, the locations of play areas (not equipment) should be shown on the overall layout to allow officers to confirm compliance with minimum buffer distances for each play area type. In addition, separate plans for the associated play areas should be submitted detailing indicative equipment, plus benches, fencing, bins etc. Detailed play area design can be secured via condition.
- M4(3) and M4(2) Accessible Dwellings – Disabled bays in communal apartment car parks required 1.2m on both sides (i.e. 4.8m wide) for building reg compliance. Disabled parking for private M4(3) plots needs to be 6 x 3.6m for all compliant plots. Appears several non-compliant spaces which need to be reviewed alongside review/confirmation of travel distances. M4(2) disabled spaces need to be able to be converted to 3.3m wide without removing spaces. If not able to be met, then units should not be labelled M4(2).
- Noise – Expectation that all dwellings will meet the internal and external noise standard without the need for significant noise mitigation interventions, as per best practice.

RM4 (South):

- Dwelling Mix – Currently showing a higher proportion of 3, 4, and 5-bedroom units compared to the Councils Strategic Housing Market Assessment (SHMA), but noting RMs located on peripheral edges of site where lower density housing is supported within the Design Code. Phasing strategy will need to reference how site-wide unit mix will meet housing need as part of future phases.
- Layout – RM4 less dense than RM1, and generally complements the semi-rural character of the surroundings. Some parking appeared to be remote from some plots which needed further review. Corner plots should be ideally dual fronted or have some form of active frontage on both facades, particularly for natural surveillance of POS areas. All dwellings should have direct access to the rear garden for bikes and bins.
- Height – Provision of 1 storey bungalows in RM4 is supported as accords with the Councils Accommodation for Older People and People with Disabilities Statement. Provision of some 2.5 storey and 3 storey apartment blocks along the primary road acting as key turning point in the scheme is supported subject to appropriate design.
- Parking – Currently showing 793 car parking spaces (including visitor spaces, and accounting for garage spaces counted as half a space). Lower provision of parking could be acceptable given sustainable location/access to goods/services subject to appropriate justification.
- House Types – Further design details required for each housing type variety proposed to ensure accordance with Design Code.
- Ryebank Park Character Area – Street scene provides clear and well-established design response. Dark window detailing supported, but possibly not supportive of wider bulkier surround of flint given more contemporary approach.
- Runway Park Character Area – Suggestion that additional details required in relation to how the housing types will integrate with the proposed Runway alignment. Further consideration should be given to how the surfacing, lighting or landscape provide a continuous linear park which promotes the understanding of the Runway as a non-designated heritage asset.
- Rear Garden Depths – Whilst most dwellings were acceptable, there are instances where there are deviations from the ADC Design Guide which would not be supported unless justified. Gardens should always aim to be regularly shaped to maximise amenity space and avoid maintenance issues where possible.
- M4(3) and M4(2) Compliance – Parking spaces should be carefully reviewed to ensure that widths are suitable.
- Movement – Proposed Neighbourhood Green lacks suitable pedestrian links around it and through it which results in a potentially underused and neglected space. Neighbourhood Green and the east-west green link should be an important feature of the southern part of the site. A suitable 3m wide pedestrian/cycle route around the entire development and through the site should be considered. The 3m path proposed from Yapton to the proposed Yapton Lane Roundabout should be continued south to connect to Horsemere Green Lane. All other footpaths and connections should be a minimum of 2m.
- POS and Play – The location of the central LEAP within Runway Park provides adequate natural surveillance from surrounding houses. However, the LEAP

may require additional play equipment. LEAP should ensure that it is age appropriate, challenging to users and creates a bespoke space. No details have been submitted relating to bins and dog waste bins and need to be provided. These should be included within plans and should be shown across the development (i.e. not solely within the play spaces). Hoggins is used throughout the scheme, and this is acceptable for small, short additional sections of path. However, Hoggins is not suitable for all users due to rutting and therefore key routes through POS should comprise a tarmac finish or similar. Should be some cycle parking shown near to the central Runway Park LEAP also.

Infrastructure RM:

- Drainage Basins - Would prefer a more natural design for the 'roundabout basin'.
- Landings Green - The LEAP/LAP areas within the Landings Green Drainage basin should provide clearer design strategy and be reflected within the Design Code. The play area also needs to consider adjacent root protection areas. The play area would need adequate separation from future layout proposals and may need to be increased if LAP proposed at current size. Further details are required on street furniture (bins and benches) and tarmac is needed for primary routes throughout the site.
- Runway Park - Large buffers between the activity zone and dwellings are required.
- Ryebank Park - The locations of LAPs are not accessible during all weather conditions. There is a potential risk for children safety due to being located next to SuDS basins – LAPs locations should be amended. A 3.0m wide cycle/pedestrian path around the entire southern section of the development would be supported.
- Street Trees - WSCC highways resist trees wider than 8-12 cm at the time of planting. ADC would like to understand phasing detail in terms of planting and maturity rates of the trees to ensure high-quality street scene will be delivered.
- PROW - A PROW diversion order will need to be made for PROW 363 and 175. The bridleway along Arun way is supportable (however the surface needs to suit horses and riders). Advice from WSCC PROW should be sought. This is also the case for PROW 366.
- Ecological Measures - Arun Way and the edges of St Marys Meadow don't have the details on log piles and Hibernacula (which should be positioned into areas of boundary vegetation to avoid children using them). Missing measures: insect hotels, bat/bird boxes and hedgehog homes. Additional details related to tree removals and biodiversity enhancements need to be provided at RM submission.
- Ancillary Infrastructure - Foul Water Pumping Station 2 is in an existing tree line having a negative impact on tree roots. A diversion will need to be created for an existing PROW (advice needed from WSCC PROW). No details on elevation or enclosure of the substation (materials should reflect the surrounding development) and submitted with the RM applications.

Consultation with WSCC

4.9 The timeline of these meetings is set out below.

- 17th March 2024 - Pre-application Advice
- 9th July 2024 – Pre-application Advice

4.10 A summary of the feedback from these meetings is provided below.

Pre-application Advice (17 March 2024)

- 4.11 The project team met with WSCC highways and drainage officers on 17th March 2024. The key feedback from this meeting was as follows:
- Segregated route as opposed to shared use pedestrian/cycle infrastructure along spine road would be preference, but note shared provision is acceptable as per ADC Design Guidance SPD.
 - Applications should incorporate Copenhagen style crossings along cycle routes.
 - Visibility splays will need to be considered at all crossings.
 - Link to potential future secondary school may need to consider how to accommodate additional cyclists and pedestrians.
 - No WSCC standards on junction angles, rely on Manual for Streets Guidance.
 - WSCC likely to support reduced parking standards where dwellings are located in close proximity to public transport infrastructure.
 - Stage 1 road safety audit will be required for spine road.
 - WSCC will not accept allocated parking on-street. Can only be for visitor parking or unallocated.
 - Plans should show what drainage basins serve specific parts of the site.

Pre-application Advice (09 July 2024)

- 4.12 The project team had a follow up meeting with WSCC highways and drainage officers on 9th July 2024. The key feedback from this meeting was as follows:
- Project team should ensure junctions have crossing opportunities and consider introducing more dropped kerbs and crossings along the spine road.
 - Applications should provide an overlay plan showing the wider cycle routes and pedestrian connections to ensure proper connectivity is achieved.
 - Need to discourage parking on the verges of the spine road, preferably with non-intrusive measures rather than physical barriers such as bollards.
 - No drop-off layby along the primary spine road would be supported for the primary school to ensure sustainable travel habits.
 - Stem widths of street trees and their impact on visibility splays need to be considered. WSCC adoptions will only accept 8-12cm stem girth.
 - Visitor parking allocation should be prioritised in areas with higher need (denser parts of the site) and avoid clustering in areas with sufficient parking already provided.
 - Some areas identified as potentially large enough for parking within private curtilage (i.e. with excess area provided behind allocated parking spaces)

should be reviewed to ensure 'overhanging' parking doesn't impact pedestrian safety or lead to illegal parking behaviour.

- Reduction of parking standards for flats are considered acceptable given sustainable location of site, and particularly where they are within walking distance to the spine road and have sustainable transport options, such as cycle parking, and accessible routes to Ford Station.
- Adding an additional pedestrian connection loop at the bottom of one of the southern basins, near Yapton Road, to improve pedestrian access and create a continuous path along the frontage of the development would be strongly supported.

Conclusions

- 4.13 The extensive pre-application consultation process undertaken both during Design Code development and through reserved matters pre-application engagement has helped inform the detailed design and mitigation strategies set out within each of the proposed reserved matters applications.

5.0 The Proposals

Descriptions of Development

- 5.1 The full description of development for each reserved matter phase is as follows:

Infrastructure RM (IRM)

Approval of reserved matters (layout, scale, appearance and landscaping) following outline consent F/4/20/OUT for Infrastructure RM, for the provision of a primary spine road and associated secondary road junctions, pavement, footpaths, cycle infrastructure and bus stops; site wide drainage infrastructure, including foul pumping stations, foul sewer infrastructure, SUDS basins, SUDS swales, surface water infrastructure; acoustic fencing; public open space, including landscape details, play areas, footpaths & associated works.

RM1 (North)

Approval of reserved matters (layout, scale, appearance and landscaping) following outline consent F/4/20/OUT for phase RM1 (North), for the erection of 341 no. residential dwellings plus associated roads, infrastructure, parking, landscaping, and associated works.

RM4 (South)

Approval of reserved matters (layout, scale, appearance and landscaping) following outline consent F/4/20/OUT for phase RM4 (South), for the erection of 357 no. residential dwellings plus associated roads, infrastructure, parking, landscaping, open space & play areas, and associated works.

- 5.2 These reserved matters applications are made pursuant to condition 1 (reserved matters details) and in accordance with outline condition 4 (approved parameter plans) and outline condition 7 (Design Code).
- 5.3 The outline permission requires the submission of reserved matters applications for each development phase in accordance with a Phasing Strategy submitted prior to or concurrently with the first Reserved Matters application (Cond. 5 - Phasing). The site-wide phasing strategy has been submitted and approved alongside these respective reserved matters applications as a standalone discharge of condition application (ref. [F/36/24/DOC](#)).

Quantum of Development & Affordable Housing

- 5.4 The proposed developments will deliver 341 x homes within the RM1 phase, and 357 x homes within the RM4 phase. Cumulatively, both applications will deliver a total of 698 homes out of the outline allowance for up to 1,500 homes.
- 5.5 Alongside the proposed 488 x market homes, both applications will also deliver 30% affordable housing, cumulatively totalling 210 x new affordable homes comprising intermediate First Homes, intermediate shared ownership and affordable rent homes. **Table 1** below outlines the proposed combined unit mix, whereas **Table 2** and **Table 3**

detail the market/ affordable tenure split across each RM1 and RM4 phases respectively.

Table 1: Proposed Accommodation Schedule (RM1 and RM4 Combined)

	RM1	RM4	Total	
Dwelling type	Number of Units			%
1 Bed apartment	42	15	57	8.2%
2 Bed apartment	30	18	158	22.6%
2 Bed house	39	71		
3 Bed house	156	164	320	45.8%
4 Bed house	69	82	151	21.6%
5 Bed house	5	7	12	1.7%
Total	341	357	698	

Table 2: RM1: Proposed Market and Affordable Housing Mix

	Market	Affordable	Total	
Dwelling type	Number of Units			%
1 Bed apartment	0	42	42	12.3%
2 Bed apartment	0	30	69	20.2
2 Bed house	34	5		
3 Bed house	133	23	156	45.7%
4 Bed house	67	2	69	20.2%
5 Bed house	5	0	5	1.5%
Total	239	102 (29.9%)	341	

Table 3: RM4: Proposed Market and Affordable Housing Mix

	Market	Affordable	Total	
Dwelling type	Number of Units			%
1 Bed apartment	3	12	15	4.2%
2 Bed apartment	6	12	89	24.9%
2 Bed house	22	49		
3 Bed house	137	27	164	45.9%
4 Bed house	74	8	82	23.0%
5 Bed house	7	0	7	2.0%
Total	249	108 (30.3%)	357	

Layout, Scale and Appearance

- 5.6 Both RM1 and RM4 layouts are proposed in accordance with the outline parameter plans in terms of location of development, location of public open space and SuDS infrastructure, access, densities (i.e. 20-50dph) and building heights (2-3 storeys).
- 5.7 The appearance and design of each phase follows the principles and coding set out within the approved Design Code, in particular consistency with character areas and building typology coding. The RM1 phase takes a more traditional approach to character and materiality given the adjacency of semi-rural fields along boundaries, whereas RM4 takes a more contemporary design approach reflective of its more historic and current industrial setting associated with the Ford Airfield and neighbouring uses.
- 5.8 Housing types include detached, semi-detached, terraced, bungalow and blocks of flats in key marker locations. A range of building heights, roof forms, ridge heights, setbacks, building lines and boundary treatments are utilised throughout to ensure variation across the site and to add interest within the townscape.

Landscape & Public Open Space

- 5.9 The Design Code followed a landscape led approach and advocates for high quality green infrastructure to be incorporated across the site. The landscape vision for each phase proposes a nature led approach, delivering high quality green spaces across the site that will deliver biodiversity net gains.
- 5.10 The three reserved matter phases will provide a variety of public open spaces, which include Landings Green, St. Mary's Meadow, Arun Way, Runway Park, and Ryebank Park. Each of these green spaces will deliver biodiverse rich planting schemes, with significant new hedgerow and tree planting, alongside new formal and informal play areas, recreational trails, and habitat corridors.

Transport

- 5.11 Running N-S through the centre of the site is the proposed primary spine road. This is designed as a 6.5m single carriageway, with a 2.0m footpath along the western side and a 3.5m shared pedestrian/cycleway along the eastern edge. Within the northern parts of the site, the primary spine road also includes planted verges with street trees, whereas the southern portions primarily includes landscaped swales on each side.
- 5.12 All road junctions have been designed to Manual for Streets and LTN/120 standards and are included along the primary spine road alongside strategic traffic calming measures to restrict vehicular travelling speeds along the primary spine road.
- 5.13 To promote sustainable travel behaviours and to reduce levels of car-dependence a series of tarmac and hoggins type pedestrian and cycle paths are proposed (plus upgrading PROW 363 to a bridle way) to maximise site-wide connectivity and to promote sustainable connections beyond the site, including to link with the proposed upgraded pedestrian/cycle path along Ford Road up to Ford Station.
- 5.14 Policy compliant levels of vehicle and cycle parking are proposed across both RM1 and RM4 phases – noting that given the sites sustainable location, provision and access to public transport infrastructure, implementation of a sustainable travel plan, and based

on a range of off-site infrastructure improvements and contributions being delivered, there exists sufficient justification for a 10% reduction for on-site vehicular parking.

Sustainability and Energy

- 5.15 Site-wide, a low-carbon renewable energy strategy is proposed, comprising new homes that will meet Future Homes Standards that incorporate a fabric first approach towards reducing energy and water demand. Electric air source heat pumps are proposed for each dwelling alongside solar PV provision.

Surface Water Drainage

- 5.16 A series of SuDS attenuation basins are proposed along both the southern boundary and northeast corner of the site that will provide storage capacity for the entire wider development. In addition, a series of infiltration swales are proposed within the IRM and RM4 applications which also form an important part of the landscape and biodiversity strategy for the site.

Biodiversity

- 5.17 A series of biodiversity and green infrastructure enhancements are proposed site-wide, including a biodiverse and native landscape planting strategy, integrated bee/bird/bat boxes on houses, standalone bird/bat boxes, and insect and hedgehog nesting boxes.

6.0 Planning Policy

- 6.1 This section of the statement provides a summary of the relevant national and local planning policy context including Arun District Council's adopted development plan, as well as other material considerations including supplementary planning documents and guidance.

National Policy & Guidance

National Planning Policy Framework (NPPF)

- 6.2 The revised NPPF was adopted in December 2024. Although not yet published, the government's new proposed revised method suggests ADC's annual housing need will increase from 1,342 homes/annum up to 1,476 homes/annum – a potential net increase of 134 homes/annum.
- 6.3 The 2024 NPPF sets out the government's national planning policies for England and how these should be applied. The following paragraphs are considered to be the most relevant to this application.
- 6.4 Paragraph 40 encourages early engagement to "improve the efficiency and effectiveness of the planning application system for all parties."
- 6.5 Paragraph 61 confirms the government's objective of *"significantly boosting the supply of homes"* and providing *"a sufficient amount and variety of land"* to meet specific housing requirements of different groups.
- 6.6 Paragraph 96 promotes development that achieves *"healthy, inclusive and safe places...that enables and supports healthy lifestyles with the provision of safe and accessible green infrastructure and sports facilities."*
- 6.7 Paragraph 109 confirms that 'transport considerations are integral to the design of schemes and contribute to making high quality places'. Paragraph 117 goes on to state that *"application for development should:*
- *Give priority first to pedestrian and cycle movements;*
 - *Address the needs of people with disabilities and reduced mobility in relation to modes of transport;*
 - *Create places that are safe, secure and attractive;*
 - *Allow for the efficient delivery of goods, and access by service and emergency vehicles;*
 - *Be designed to enable charging of plug-in and other ultra-low emission vehicles in safe, accessible and convenient locations."*
- 6.8 Paragraph 155 (c) states that planning decisions should *"give substantial weight to the value of using suitable brownfield land within settlements for homes and other identified needs, proposals for which should be approved unless substantial harm would be caused, and support appropriate opportunities to remediate despoiled, degraded, derelict, contaminated or unstable land"*.

- 6.9 Paragraph 130 stresses the importance of making efficient use of land, advising *“it is especially important that planning policies and decisions avoid homes being built at low densities, and ensure that developments make optimal use of the potential of each site.”*
- 6.10 Paragraph 131 reaffirms the importance of good design. It states: *“The creation of high-quality buildings and places is fundamental to what the planning and development process should achieve. Good design is a key aspect of sustainable development, creates better places in which to live and work and helps make development acceptable to communities.”*

Planning Practice Guidance (PPG)

- 6.11 In March 2014 the Department for Communities and Local Government (DCLG)¹ launched the Planning Practice Guidance (PPG) web-based resource. The PPG provides guidance on a range of planning topics and procedural issues. Those of particular relevance to this application include:

- Climate change
- Design: process and tools
- Flood risk and coastal change
- Healthy and safe communities
- Housing needs of different groups
- Housing supply and delivery
- Noise
- Renewable and low carbon energy
- Travel plans, transport assessments and statements
- Use of planning conditions.

National Design Guide

- 6.12 The government published the National Design Guide (NDG) on 1st October 2019. The purpose of the document is to promote good design in all new development. The NDG provides guidance on the issues that should be considered either when preparing planning applications for development or when assessing the quality of submitted schemes. The NDG is intended to *“illustrate how well-designed places that are beautiful, enduring and successful can be achieved in practice.”*

Local Policy & Guidance

- 6.13 In accordance with the provisions of Section 70(2) of the Town and Country Planning Act 1990 and Section 38(6) of the Planning Compulsory Purchase Act 2004, an

¹ Now renamed the Ministry of Housing, Communities and Local Government (MHCLG).

application must be considered against the provision of the adopted development plan, unless material considerations indicate otherwise.

ADC Development Plan

6.14 The adopted development plan for Arun District Council currently comprises:

- The Arun Local Plan 2011-2031
- West Sussex Joint Minerals Local Plan (2018)
- West Sussex Waste Local Plan 2014
- Made Neighbourhood Plans (incl. Ford Neighbourhood Development Plan 2017-2031)
- South Marine Plans (2018)

Arun Local Plan 2011-2031

6.15 The Arun Local Plan (ALP) was adopted in July 2018. Relevant policies from the plan for this application include:

- Policy AH SP2 (Affordable Housing)
- Policy D DM1 (Aspects of Form and Design Quality)
- Policy ECC SP1 (Adapting to Climate Change)
- Policy ECC SP2 (Energy and Climate Change Mitigation)
- Policy ENV DM4 (Protection of Trees)
- Policy ENV DM5 (Development and Biodiversity)
- Policy ENV SP1 (Natural Environment)
- Policy H DM1 (Housing Mix)
- Policy H SP2 (Strategic Site Allocations)
- Policy H SP2c (Inland Arun – SD8 Ford)
- Policy HWB SP1 (Health and Wellbeing)
- HER SP1 (The Historic Environment)
- HER DM1 (Listed Buildings)
- HER DM2 (Locally Listed Buildings or Structures of Character)
- HER DM3 (Conservation Areas).
- Policy INF SP1 (Infrastructure Provision and Implementation)
- Policy LAN DM1 (Protection of Landscape Character)
- Policy OSR SP1 (Allotments)
- Policy QE DM1 (Noise Pollution)
- Policy QE DM2 (Light Pollution)
- Policy QE SP1 (Quality of the Environment)

- Policy SD SP1 (Sustainable Development)
- Policy SD SP1a (Strategic Approach)
- Policy T DM1 (Sustainable Travel and Public Rights of Way)
- Policy T DM2 (Public Parking)
- Policy T SP1 (Transport and Development)
- Policy W DM2 (Flood Risk)
- Policy W DM3 (Sustainable Urban Drainage Systems)
- Policy WM DM1 (Waste Management)
- Policy W SP1 (Water)

West Sussex Waste Local Plan 2014

- Policy W2 (Safeguarding Waste Management Sites)
- Policy W10 (Strategic Waste Allocations)
- Policy W23 (Waste Management within Department)

Ford Neighbourhood Development Plan 2017-2031

6.16 The Ford Neighbourhood Development Plan 2017-2031 was made on 9th January 2019. Relevant policies from the plan for this application include:

- Policy SA1 (Ford Airfield)
- Policy EH1 (Protection of trees and hedgerows)
- Policy EH3 (Buildings and structures of character)
- Policy EH4 (Surface water management)
- Policy EH8 (Lighting)
- Policy GA1 (Footpath and cycle path network)
- Policy GA2 (Parking and New Development)
- Policy GA3 (Streets and Access Ways to serve new development)
- Policy H2 (Housing Mix)
- Policy H4 (Recreational Space)
- Policy H6 (Integration of New Housing)

Supplementary Planning Documents (SPD)

6.17 The following SPDs are also considered relevant to this application:

- Arun Design Guide (2024)
- Open Space, Playing Pitches & Indoor & Built Sports Facilities (2020)
- Arun Parking Standards (2020)

Other Material Considerations

The Landings Design Code

- 6.18 Condition 7 of the outline planning permission required the submission of a site-wide Design Code for approval by ADC, prior to the submission of any reserved matters application at the site.
- 6.19 The Design Code was prepared by tor&co in collaboration with officers at ADC. A final version of the Design Code was approved in September 2024 (ref. F/10/24/DOC) and this document forms a material consideration for all future reserved matters application at the site (except the employment zone which will be subject to its own design code).
- 6.20 The Design Code provides a set of rules to guide the detailed design of the Landings development and ensure good quality design and continuity between the development parcels as they come forward. The Design Code includes a combination of mandatory and recommended rules.
- 6.21 The submitted Design and Access Statements, and their supporting Code Compliance Statements, explain how the RM1 and RM4 parcels have been designed in accordance with the approved Design Code.

ADC - Accommodation for Older People and People with Disabilities Guidance

- 6.22 The Accommodation for Older People with Disabilities guidance document (post consultation version) was approved to be a material consideration at ADC's Full Council meeting on 13th November 2019. The guidance document provides the starting point for negotiations to help raise the standards and delivery of these important types of accommodation.

Emerging Local Plan

- 6.23 The adopted Arun Local Plan 2018 is now more than 5 years old, therefore ADC are updating their Local Plan to ensure that future development needs are met, and to incorporate with various legislative changes since the current Local Plan was adopted.
- 6.24 At the 6th March 2024 special meeting of the Planning Policy Committee, members approved the Direction of Travel Document as the council's method to undertake an Issues & Options consultation under Regulation 18 of the Town and Country Planning (Local Planning) (England) Regulations 2012. This initial round of consultation was undertaken 25th March 2024 through 13th May 2024
- 6.25 No present timescales for Regulation 19 publication are provided on ADC's website or within the Council's latest published Local Development Scheme (2023-2025).

Emerging Neighbourhood Plan

- 6.26 Ford Parish Council have published a Regulation 14 draft of the Ford Parish Council Neighbourhood Development Plan (2024-2041). Page 8 of the Plan sets out those policies which have changed and those that are being saved. As the Neighbourhood Plan has yet to be submitted or passed through examination it's draft policies are to be provided no weight in decision making.

Housing Land Supply & Housing Delivery Test

- 6.27 According to the latest Authority Monitoring Report (1st April 2022- 31st March 2023), ADC currently has a land supply of 4.17 years.
- 6.28 Furthermore, we note based on the Government's latest Housing Delivery Test results, based on 2020/21-2022/23, ADC only delivered 2,336 homes against a delivery target of 3,336 homes (70% of target). On this basis the Council are not meeting their Housing Delivery Test requirements, and the presumption of sustainable development is therefore to be applied against out-of-date policies.
- 6.29 We also note the Government's new proposed revised method suggests ADC's annual housing need may increase from 1,342 homes/annum up to 1,476 homes/annum – a potential net increase of 134 homes/annum, which is expected to be reflected in ADC's next Authority Monitoring Report up to March 2024.

7.0 Planning Assessment

- 7.1 The following section identifies and addresses the planning considerations pertaining to the determination of the three reserved matters applications. Where appropriate, reference is made to the supporting documents throughout.

Principle of Development

- 7.2 The principle of development of the site for residential development has been established through the outline permission (F/4/20/OUT) which was approved by ADC on 14th July 2023. The approved outline secured various conditions and S106 obligations/contributions to ensure the future development would be delivered in accordance with national policy and ADC's development plan.
- 7.3 In planning policy terms, the principle of mixed-use development was also established under ADC Local Plan Policy H SP2c (SD8 – Ford), and Ford Neighbourhood Plan Policy SA1 (Ford Airfield). As the site is allocated for development through Arun's Local and the Ford Neighbourhood Development Plan, the proposals are considered automatically to be sustainable development in accordance with paragraph 11c of the NPPF.
- 7.4 These reserved matters applications are made pursuant to condition 1 of the outline planning permission, which requires the submission of reserved matters applications for layout, scale, appearance and landscaping details for each phase of development.

Housing Delivery & Affordable Housing Statement

Policy Summary

- 7.5 NPPF Paragraph 130 states that where there is an existing or anticipated shortage of land for meeting identified housing needs, it is especially important that planning policies and decisions avoid homes being built at low densities and ensure that developments make optimal use of each potential site.
- 7.6 ADC Local Plan Policy H DM1 (Housing Mix) states the Council will seek a mix of dwelling types and sizes, to include affordable housing units. For developments of 11 units or more the Council shall require a balanced mix of market and affordable dwelling sizes including family sized accommodation based on the most up to date SHMA recommendations. The tenure mix for development schemes shall be negotiated on a case-by-case basis, and subject to viability considerations. Developers shall have regard to the most up to date version of the SHMA.
- 7.7 Ford Neighbourhood Plan Policy H2 (Housing Mix) states that proposals for new housing must deliver a range of house types and tenures including bungalows, sheltered accommodation, self-build and shared equity properties.
- 7.8 ADC Local Plan Policy AH SP2 (Affordable Housing) seeks to secure minimum 30% on-site affordable housing. Affordable housing must be visually indistinguishable from market housing with large groupings of single tenure dwellings or property types avoided. Affordable housing units shall be permitted in small clusters throughout development schemes. The affordable dwelling mix should comprise of the following range of homes unless evidence indicates otherwise:

- 1 bedroom 35 – 40%
- 2 bedroom 35 – 40%
- 3 bedroom 15 – 20%
- 4+ bedroom 5 – 10%

7.9 We note ADC's most recent published SHMA (Updated Housing Needs Evidence – Sept. 2016) states the suggested broad housing tenure and mix needs are as provided below in **Figure 5**:

	1 bedroom	2 bedrooms	3 bedrooms	4+ bedrooms
Market	5-10%	40-45%	35-40%	10-15%
Intermediate/ Starter Homes	15-20%	50-55%	25-30%	0-5%
Affordable Rented	35-40%	35-40%	15-20%	5-10%

Figure 5 - SHMA (2016) Housing Mix and Tenure Needs

7.10 ADC Design Guide J.09 (Inclusive Design & Adaptability) also states all major housing developments should include an appropriate level of affordable housing, the quality of which should be indistinguishable from private rented homes in order to encourage social inclusion and community cohesion. L.03 (High Quality & Development) also seeks to ensure all development remains 'tenure blind' with no difference between the quality of market and affordable housing.

Planning Assessment

- 7.11 The proposed RM1 and RM4 developments will cumulatively deliver a total of 698 x homes out of the outline allowance for up to 1,500 homes. The RM1 phase will deliver 341 x homes, whereas the RM4 phase will deliver 357 x homes. Alongside the proposed 488 x market homes, both applications will also deliver 30% affordable housing, cumulatively totalling 210 x new affordable homes comprising intermediate First Homes, intermediate shared ownership and affordable/social rent homes.
- 7.12 The outline consent and its corresponding S106 legal agreement secured the provision of 30% affordable housing site wide, as defined by "Affordable Housing Provision" which "*means the 30% (thirty percent) of Dwellings constructed on the Land within the Development to be provided (subject to the terms of this Agreement) as Affordable Housing Dwellings and First Homes in accordance with the Affordable Housing Scheme and Affordable Housing Parcel Scheme.*"
- 7.13 "Affordable Housing" as defined within the S106 is "any form of housing identified within legislation national planning policy framework or a ministerial statement as meeting the requirements of affordable housing planning obligation under Section 106 of the Act (or any successor legislation), but is not limited to:
- affordable rented housing;
 - shared ownership housing;
 - intermediate housing (including intermediate rent, shared equity and low cost homes for sale) or any other form of intermediate tenure as may be agreed by the District Council;

- discounted market sales; or
- starter homes as specified in Sections 2 and 3 of the Housing and Planning Act 2016.”

7.14 First Schedule, Part 1 (1)(1.2) obligates the applicant to submit as part of the Phasing Strategy an Affordable Housing Scheme for each Reserved Matters Area and a subsequent Affordable Housing Parcel Scheme for approval prior to commencement of development.

7.15 “Affordable Housing Scheme” means a written scheme submitted to and agreed by the District Council pursuant to paragraph **Error! Reference source not found.** of Part 1 of the First Schedule which sets out details:

- a) of the number of the Affordable Housing Dwellings and First Homes within the Development it being agreed that the number of Affordable Housing Dwellings and First Homes within a Phase need not total 30% (thirty percent) of the Dwellings within that Phase so long as it can be demonstrated that the Phasing Strategy has been complied with and overall 30% (thirty percent) of the Dwellings on the Development are to be provided as Affordable Housing and First Homes;*
- b) demonstrating compliance with the Affordable Housing Standards.*

7.16 “Affordable Housing Parcel Scheme” means a scheme for the provision of Affordable Housing and First Homes within a Reserved Matters Area which includes a plan and accommodation schedule showing the location dwelling type and tenure mix of the Affordable Housing Dwellings and First Homes for the relevant Reserved Matters Area to be submitted to and approved in writing by the District Council pursuant to paragraph **Error! Reference source not found.** of Part 1 of the First Schedule and any amendment or replacement to that scheme which the District Council may approve from time to time it being agreed that the number of Affordable Housing Dwellings and First Homes within a Reserved Matters Area need not total 30% (thirty percent) of the Dwellings within that Reserved Matters Area so long as it can be demonstrated that the Affordable Housing Scheme can be complied with.

7.17 In terms of tenure split, First Schedule Part 2 (2)(2.1) of the S106 requires that 25% of the Affordable Housing Provision comes forward as First Homes (an intermediate discount market sale tenure), meaning the remaining 75% of affordable homes will come forward in accordance with the either the S106 defined “Approved Community Body Tenure Split” or the “Registered Provider Tenure Split”.

7.18 “Approved Community Body Tenure Split” means:

- *37% (thirty seven percent) of the Affordable Housing Provision to be Affordable Rented Housing;*
- *38% (thirty eight percent) of the Affordable Housing Provision to be Intermediate Housing;*
- *or such other alternative tenure split which the District Council may approve.*

7.19 “Registered Provider Tenure Split” means:

- 67% (sixty seven percent) of the Affordable Housing Provision to be Affordable Rented Housing;
- 8% (eight percent) of the Affordable Housing Provision to be Intermediate Housing;
- or such other alternative tenure split which the District Council may approve.

7.20 Across both RM1 and RM4 phases, the total quantum of development equals 698 x residential dwellings, comprising 488 x market tenure homes, and 210 x affordable tenure homes (30%). The combined RM1/RM4 unit mix is provided below in **Table 4**:

Table 4 - RM1 and RM4 Combined Unit Mix

	RM1		RM4		Combined Total	
Dwelling Type	No. of Units	%	No. of Units	%	No. of Units	%
1 Bed apartment	42	12.3%	15	4.2%	57	8.2%
2 Bed apartment	30	20.2%	18	24.9%	158	22.6%
2 Bed house	39		71			
3 Bed house	156	45.7%	164	45.9%	320	45.8%
4 Bed house	69	20.2%	82	23.0%	151	21.6%
5 Bed house	5	1.5%	7	2.0%	12	1.7%
Total	341	48.9%	357	51.1%	698	

7.21 The proposed market and affordable unit type and mix for each phase is provided below in **Table 5** for RM1 and **Table 6** for RM4.

Table 5 - RM1: Proposed Market and Affordable Housing Mix

	Market		Affordable		Total	
Dwelling Type	No. of Units	%	No. of Units	%	No. of Units	%
1 Bed apartment	0	0.0%	42	41.2%	42	12.3%
2 Bed apartment	0	14.2%	30	34.3%	30	20.2%
2 Bed house	34		5		39	
3 Bed house	133	55.6%	23	22.5%	156	45.7%
4 Bed house	67	28.0%	2	2.0%	69	20.2%
5 Bed house	5	2.1%	0	0.0%	5	1.5%
Total	239	70.1%	102	29.9%	341	

Table 6 – RM4: Proposed Market and Affordable Housing Mix

	Market		Affordable		Total	
Dwelling Type	No. of Units	%	No. of Units	%	No. of Units	%
1 Bed apartment	3	1.2%	12	11.1%	15	4.2%

	Market		Affordable		Total	
Dwelling Type	No. of Units	%	No. of Units	%	No. of Units	%
2 Bed apartment	6	11.2%	12	56.5%	89	24.9%
2 Bed house	22		49			
3 Bed house	137	55.0%	27	25.0%	164	45.9%
4 Bed house	74	29.7%	8	7.4%	82	23.0%
5 Bed house	7	2.8%	0	0.0%	7	2.0%
Total	249	69.7%	108	30.3%	357	

7.22 The proposed affordable housing types for both the RM1 and RM4 applications are further detailed within the following supporting plans (please also refer to associated house and apartment type drawings for details of individual layouts) which are also provided at **Appendix I**:

- RM1: Proposed Housing Mix and Tenure Plan (ref. 180641-RMN1-MP-P004_RevA)
- RM4: Housing Tenure Plan – A (ref. 22.1706.2060_RevC)

7.23 In terms of tenure distribution across each phase, and in accordance with the S106 tenure requirements and the proposed affordable housing layouts referenced above, we set out below in **Tables 7-10** indicatively how the S106 “Approved Community Body Tenure Split” or alternatively how the “Registered Provider Tenure Split” could potentially come forward for each of the RM1/RM4 phases. We have also provided indicative tenure distribution plans at **Appendix I** which demonstrate how the indicative S106 affordable mixes would spatially come forward in alignment with the schedules set out below – noting the final tenure and unit mix will be subject to negotiations with affordable housing providers and would be secured in accordance with the S106 First Schedule Part 1, para 1.3 via the submission and approval of an “Affordable Housing Parcel Scheme” prior to commencement of development:

Table 7 – RM1: Indicative Approved Community Body Affordable Tenure and Unit Mix

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (37%)	%	Intermediate (38%)	%
1 Bed apartment	42	41.2%	18	69.2%	15	38.5%	9	24.3%
2 Bed apartment	30	34.3%	8	30.8%	18	53.8%	4	16.2%
2 Bed house	5		0		3		2	
3 Bed house	23	22.5%	0	0.0%	3	7.7%	20	54.1%
4 Bed house	2	2.0%	0	0.0%	0	0.0%	2	5.4%
Total	102		26	25.5%	39	38.2%	37	36.3%

Table 8 – RM1 - Indicative Approved Registered Provider Affordable Tenure and Unit Mix

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
1 Bed apartment	42	41.2%	18	69.2%	24	35.8%	0	0.0%
2 Bed apartment	30	34.3%	8	30.8%	22	40.3%	0	0.0%
2 Bed house	5		0		5		0	
3 Bed house	23	22.5%	0	0.0%	14	20.9%	9	100.0%
4 Bed house	2	2.0%	0	0.0%	2	3.0%	0	0.0%
Total	102		26	25.5%	67	65.7%	9	8.8%

Table 9 - RM4 - Indicative Approved Community Body Affordable Tenure and Unit Mix

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (37%)	%	Intermediate (38%)	%
1 Bed apartment	12	11.1%	0	0.0%	12	29.3%	0	0.0%
2 Bed apartment	12	56.5%	0	100.0%	12	70.7%	0	12.5%
2 Bed house	49		27		17		5	
3 Bed house	27	25.0%	0	0.0%	0	0.0%	27	67.5%
4 Bed house	8	7.4%	0	0.0%	0	0.0%	8	20.0%
Total	108	30.3%	27	25.0%	41	38.0%	40	37.0%

Table 10 - RM4 - Indicative Approved Registered Provider Affordable Tenure and Unit Mix

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
1 Bed apartment	12	11.1%	0	0.0%	12	16.7%	0	0.0%
2 Bed apartment	12	56.5%	0	100.0%	12	45.8%	0	11.1%
2 Bed house	49		27		21		1	
3 Bed house	27	35.2%	0	0.0%	23	9.0%	4	44.4%
4 Bed house	8	7.4%	0	0.0%	4	5.6%	4	44.4%
Total	108		27	25.0%	72	66.7%	9	8.3%

7.24 Cumulatively, across both RM1 and RM4 phases, the indicative affordable unit and tenure mix that is envisioned to come forward is provided below in **Tables 11 and 12**.

Table 11 - RM1/RM4 - Indicative Cumulative Community Body Affordable Tenure and Unit Mix

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
1 Bed apartment	54	25.7%	18	34.0%	27	33.8%	9	11.7%

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
2 Bed apartment	42	45.7%	8	66.0%	30	62.5%	4	14.3%
2 Bed house	54		27		20		7	
3 Bed house	50	23.8%	0	0.0%	3	3.8%	47	61.0%
4 Bed house	10	4.8%	0	0.0%	0	0.0%	10	13.0%
Total	210		53	25.2%	80	38.1%	77	36.7%

Table 12 - RM1/RM4 - Indicative Cumulative Registered Provider Tenure and Unit Mix

No. of Bedrooms	No. of AH Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
1 Bed apartment	54	25.7%	18	34.0%	36	25.9%	0	0.0%
2 Bed apartment	42	45.7%	8	66.0%	34	43.2%	0	5.6%
2 Bed house	54		27		26		1	
3 Bed house	50	23.8%	0	0.0%	37	26.6%	13	72.2%
4 Bed house	10	4.8%	0	0.0%	6	4.3%	4	22.2%
Total	210		53	25.2%	139	66.2%	18	8.6%

- 7.25 Policy H DM1 of the Local Plan references the objective for the delivery of both tenures towards the creation of balanced communities. The development comprises detached, semi-detached and terraced houses and 9 x apartment buildings which provide for variety not only in housing size but also housing types which meets housing needs.
- 7.26 The proposed market and affordable mix (across both S106 'Community Body' and 'Registered Provider' tenure mixes) provide for a range of dwelling sizes from 1, 2, 3, 4 and 5-bed flats and houses. Whilst there is a larger proportion of smaller sized units within affordable tenures compared to market tenure, the combined RM1/RM4 affordable tenure is Policy AH SP2 and SHMA compliant with c. 26% 1-bed units, 46% 2-bed units, 24% 3-bed units and 5% 4-bed units.
- 7.27 We also note that the applicant has entered into a delivery agreement with Abri (Registered Partner) which will bring the overall quantum of affordable housing across the site up to 50% provision. However, the 'additional' 20% affordable homes are not S106 'affordable dwellings' secured in perpetuity for the purposes of policy consideration as they are to be sold on the open market and would not be defined as affordable dwellings for the purposes of the S106 agreement signed under reference F/4/20/OUT.
- 7.28 This market tenure deviation is largely as a direct response to the development's location on the edge of settlement with the layout of the proposals seeking to provide a transition between the existing semi-rural edges toward the south and west of the site. Larger dwellings by their nature allow for a looser grain of development which can enhance the transition and soften the settlement edge. The density of the site is also important in the consideration of the impact on the character of the site and its relationship to semi-rural edges and neighbouring villages of Yapton, Clymping and

Ford. In particular the use of detached dwellings has been utilised to blend out and limit density along the southern and western edges of the site.

- 7.29 This approach is also in accordance with the approved Design Code which advocates for a looser and less dense outer perimeter which increases in density and smaller dwelling types as the development moves towards the central part of the site. As part of future RM phases, it is envisaged that a higher proportion of smaller unit types will come forward in accordance with the Design Code which ensures a mixed and balanced delivery of housing across the site.
- 7.30 All of the affordable housing (both S016 and 'additionality') will be visually indistinguishable from market housing with an avoidance of large groupings of single tenure dwellings or property types avoided. Affordable housing units are provided in small clusters of no more than 20 x homes/cluster as per recommendations set out within the outline permission Officer's Report.
- 7.31 Given that ADC cannot currently demonstrate a five-year housing land supply, nor are meeting the Housing Delivery Test, the presumption of sustainable development is applied, and the delivery of new market and affordable housing is considered to carry significant weight within the planning balance when assessing proposed developments. Notwithstanding, the proposed housing and indicative affordable tenure mixes are in broad accordance with SHMA housing needs across both market and affordable tenures and therefore considered acceptable and in compliance with S106 housing tenure requirements plus ADC Policy H DM1 and AH SPD1, and FNP Policy H2.
- 7.32 The final affordable tenure and mixes will be subject to ongoing negotiations with ADC, Community Bodies (i.e. Ford Community Land Trust) and other Registered Providers to allow the affordable housing provision to be secured as part of future 'Affordable Housing Parcel Scheme' which will be secured in accordance with the First Schedule Part 1, para 1.3 of the S106 via the submission and approval of an "Affordable Housing Parcel Scheme" prior to commencement of development of each phase.

Layout

- 7.33 For detailed layout of each reserved matter phase, please refer to the following submitted drawings:
- IRM: Enabling Infrastructure General Arrangement (2205771-D100_RevP13)
 - RM1: Proposed Site Layout and Roof Plan (180641-TOR-RMN1-MP-P003_RevA)
 - RM4: Phase 4 Proposed Site Layout (22.1706.1000_RevU)

Policy Summary

- 7.34 NPPF Paragraph 135 states that developments should function well and add to the overall quality of the area; is visually attractive as a result of good architecture, layout, scale and effective landscaping; is sympathetic to local character, the built environment and surrounding landscape context; establishes a strong sense of place through layout, design and movement networks; optimises the potential of sites alongside an appropriate mix of development; and creates places that are safe, inclusive and accessible.

- 7.35 Local Plan Policy D DM1 (Aspects of Form and Design Quality) seeks to ensure development makes the best use of land available by reflecting or improving the character of the site and surrounding area, partially through design. To achieve this, various considerations should inform design and site layout, including site conditions, character of the site and surrounding area, residential amenity (i.e. privacy, overlooking, daylight/sunlight), innovative design, adaptability, crime prevention, existing landscape, street patterns, public realm, movement networks, legibility, density and scale. All development should also comply with ADC's adopted Design Guide.
- 7.36 ADC Design Guide D.01 (Site Appraisal) of the ADC Design Guide advocates for undertaking an early-stage site appraisal to identify opportunities and constraints presented by various aspects of the site to identify the unique characteristics of a site. In particular, site layout should consider the immediate and wider area, including topography, orientation, environmental and landscape features, boundaries, built form, layouts and connections with existing infrastructure and movement networks to link key locations.
- 7.37 ADC Design Guide E.01 (Using the Site's Features and Natural Resources) of the ADC Design Guide similarly advocates for utilising the site's features and natural resources for informing site layout, including topography, orientation, landform, drainage patterns, field patterns and existing landscape features.
- 7.38 ADC Design Guide F.01 (Creating a Network of Streets, Footpaths, Cycleways & Access Arrangements) seeks to ensure that mobility networks as a first principle should be accessible by all users of all abilities. Street networks should create coherent, legible routes, and enable logical block and plot layouts which respond to natural desire lines, existing topography, and connections outside the site. Site-wide movement frameworks should incorporate a range of routes in order to offer people a choice over how to move, and follow a clear street hierarchy which defines the order or ranking of a street through width, frontages, parking arrangements, materials and street planting. All pedestrian pavements should be min. 2.0m wide and where bus stops are provided, these should be provided min. every 400m.
- 7.39 ADC Design Guide G.03 (Layout & Plot Size) states that clarity of layout should be achieved through the careful management of buildings and spaces, both of which should take priority over roads and car parking to avoid car dominated street scenes. Perimeter blocks are promoted which allow for the delivery of adequate amenity space, parking and natural ventilation and a distinguishment between public and private realm. Blocks should typically not be uniform, but should rather reflect and contribute to the character of a street. Consideration should also be given to building lines, front defensible spaces, and location of key marker buildings to assist with legibility.
- 7.40 Alongside the approved Design Code, condition 4 (approved drawings) of the outline consent stipulates that future development at this site shall be brought forward in accordance with the following the parameter plans. These have set clear design and layout principles which all future development must accord with:
- Access and Movement Parameter Plan - RG-M-122 Rev. M
 - Green and Blue Infrastructure Parameter Plan - RG-M-121 Rev. N
 - Land Use and Density Parameter Plan - RG-M-123 Rev. L

Planning Assessment

- 7.41 The Design Code has been developed following a landscape-led approach as advocated within the Arun Design Guide. The proposed layouts utilise the natural features of the site to assist with integrating them into the site-wide context, which we note comprises:
- Natural topography of the site, which generally runs west to east in the northern portions of the site, and north to southwest in the southern parts of the site.
 - Neighbouring agricultural fields, particularly to the west, east and south of the site which create semi-rural edges to the site;
 - Existing boundary planting, mostly comprising mature hedgerows along the northern, southern and eastern boundaries;
 - Existing tree groups within the site, particularly along Arun Way and adjacent the northern part of the primary spine road;
 - Built form, character and connections to the neighbouring villages of Ford, Yapton and Climping, whilst also protecting against coalescence;
 - Adjacent industrial uses, particularly constraints associated with noise and odour.
- 7.42 From a technical perspective, site layout across the outline site and each RM phase has been informed by site topography, particularly to accommodate the surface water drainage strategy. The site is for the most part is a similar and fairly level topography but does slope slightly from west to east in the northern part of the site, and north to southwest within the southern part of the site. Site-wide storage SuDS basins are therefore proposed along the eastern and southern boundaries of the site (both of which are respectively located in Landings Green POS and Ryebank Park POS within the IRM phase) and in accordance with the approved parameter plans. The street/swale network similarly follows the natural topography of the site and helps inform the block structure for each phase.
- 7.43 The location of the primary spine road corridor was approved via the outline permission's 'Access and Movement Parameter Plan'. As per the paragraph 4.16 of the Design Code, the primary spine road must deliver all of the following:
- Be linear but include a gentle meandering alignment that creates visual interest and prohibits excessive vehicle speeds;
 - Where possible, be informed by the alignment of structural planting, existing and proposed, to provide a balance between the built and natural environment;
 - Include variations in the overall width of the movement corridor, to inform and reflect the character of distinctive areas along its length; and
 - Include a widening at the heart of the local centre to create a new open space around which all retail and community spaces can front on to.
- 7.44 The primary spine road comprises a bi-directional 6.5m wide single carriageway with a 3.5m shared pedestrian/cycle path along the eastern side of the corridor and 2.0m footpath along the western side of the corridor. The northern section of the primary road includes wider verges for street tree planting, whereas within the southern part of the site, primarily comprises drainage swales and street tree planting on either side of the carriageway.

- 7.45 An informal grid structure of secondary and tertiary streets, including footpaths and cycle paths within the RM1 and RM4 phases connect into the primary spine road and assist with the establishment of a cohesive and legible movement hierarchy and block structure that provides good levels of connectivity across the site.
- 7.46 The Design Code advocates for a graduation from the more informal block types around the edges of the site, where the development is expected to softly integrate with the surrounding semi-rural context, into a more structured intermediate, compact and regular block typologies towards the Local Centre where an increase in scale is more supported both within the outline parameter plans and the Design Code.
- 7.47 The block structure and layout across both RM1 and RM4 is further delineated by the establishment of the various character areas across the site. We summarise the key guiding principles for each character area below in **Table 13**.

Table 13 - Summary of Character Area Guiding Principles

Character Area	Defining Principles
Ford Lane (RM1)	- Northern gateway to the new development, and the wider Ford when approaching from Yapton in the west. - Semi-rural development creating an appropriate transition to the existing development on Ford Lane. - Built form and character to create a strong connection to historic Ford.
St. Mary's Meadow (RM1 & IRM)	- Soft, informal interface with the rural landscape. - Landscaped edge that gives soft filtered views of the development edge and provides opportunities for pedestrian and cycle movements to the Arun Way. - Organic and loose block structure. - Key movement corridors draw the open landscape from the west into the development. - High degree of variation in architectural forms, detailing, materials, and set backs, to give a softer, more rural feel. - Establish a sympathetic relationship with St Mary's Conservation Area and the Meadow Gardens development visible across the fields.
Arun Way & Landings Green (RM1 & IRM)	- A framework of gently meandering, green streets, created by wider verges and enhanced tree planting along key movement corridors. - A bold, confident edge to the public open spaces of the Arun Way and Landings Green. - Transition from the rural edges to The Heart of Ford. - Roads running east to west should terminate at natural break points within the tree belt, providing connectivity into

Character Area	Defining Principles
	Landings Green and onwards to historic Ford and Ford Train Station. • More traditional architectural character that draws on the local vernacular and agricultural buildings around Ford.
Runway (RM4)	• This area shall be a celebration of the industrial heritage of the airfield which must be reflected through the landscape and built form of the proposals. • The creation of a new linear park that reflects the alignment of Runway 07. • Transition from the rural edge of Ryebank Park to The Heart of Ford. • Formalising elements through front boundary and landscape treatments. • Creation of a unique character that ensures a clear distinction from the built development of Yapton and assists with avoidance of coalescence.
Runway Park (RM4)	• Gently curved edge that follows the natural curved profile of the park. • A framework of weaving green corridors created through a network of swales that form part of the blue infrastructure strategy for the southern neighbourhood. • Built form to provide a harmonious relationship with the Runway character area. • Contemporary architecture through the fenestration and architectural detailing.
Ryebank Park (RM4 & IRM)	• Landscape setting to provide physical and visual separation from adjacent settlements. • Significant blue infrastructure to sustainably manage the surface water drainage for the southern neighbourhood. • A definitive development edge will be created through the new contemporary architecture to create a distinctive character to the proposals. • Combination of the above to create a southern gateway with sense of arrival from Yapton Road.

7.48 The proposals ensure that each of the character areas will have their own distinct identity but will complement each other to allow a subtle transition between the adjacent areas. This harmonious relationship will avoid jarring juxtapositions between character areas and result in more cohesive masterplan.

- 7.49 As set out above, the proposed layout for each RM phase is considered to be in accordance with the Design Code, Local Plan Policy D DM1 and Arun's Design Guide and is therefore acceptable in design and policy terms.

Scale

Policy Summary

- 7.50 NPPF Paragraph 135 states that developments should function well and add to the overall quality of the area; are visually attractive as a result of good architecture, layout, scale and effective landscaping; is sympathetic to local character, the built environment and surrounding landscape context; establishes a strong sense of place through layout, design and movement networks; optimises the potential of sites alongside an appropriate mix of development; and creates places that are safe, inclusive and accessible.
- 7.51 Further, NPPF Paragraph 129 states that development should be supported where it makes an efficient use of land, particularly where development meets identified needs, makes use of existing infrastructure, promotes and prioritises sustainable travel modes, maintains an area's prevailing character, promotes regeneration, and secures well-designed, beautiful and attractive places.
- 7.52 Policy D DM1 (Aspects of Form and Design Quality) states the scale of development should generally keep within the general confines of the overall character of a locality unless it can be demonstrated that the contrary would bring a substantial visual improvement.
- 7.53 The supporting text states:

For development to be successfully integrated within the existing environment, scale is an important design element. When designing to the local character of building forms, patterns of development and the natural environment, the scale of new development should:

- *Avoid obscuring public views, vistas and skylines;*
- *Ensure the height and massing does not interrupt or debase the rhythm of an existing building/roof line and overall streetscape, or detract from the local and wider area's character;*
- *Respect the existing scale in the detailing and composition of elements such as windows, doors etc;*
- *Have regard for the principal users of development schemes – people; so that buildings and infrastructure are scaled for their maximum benefit and enhance their experience of the space; and*
- *Taller buildings are more suited to key locations such as on corners, along principal routes, the end of vistas or around parks but this would be more site specific.*

- 7.54 ADC Design Guide J.02 (Scale & Massing) states that the appropriate scale for new buildings should be determined by their context, their location within the order of

streets, and their function and positioning. Further, buildings which face onto open landscape should generally be smaller scale to avoid stark contrasts at the edge of development sites. Development should generally respond to the existing scale and massing of the surrounding built environment, although an uplift in scale can be appropriate for landmark buildings or facilities in key locations. Small variations in height through differing ridge and eaves heights and varying frontage widths are also considered to add interest to street scenes subject to careful design and integration.

- 7.55 ADC Design Guide G.02 (Density & Uses) states the scale and density of development should ensure that places are walkable, navigable, feel comfortable and enable people to carry out their daily activities with ease. Density should be appropriate to location, balancing the need for efficient use of land with a design that responds to and enhances the existing character of the site or wider locality, with higher densities in village centres and along strategic routes where there is good access to public transport and facilities. Densities should decrease with distance from the centre of a settlement, to ensure that development relates sensitively to its setting and addresses the edges of the site in a positive way, particularly where development is adjacent to settlement gaps or open fields. Given densities should be achieved over wider areas, a range of dwelling types and sizes should be provided to add variety, interest and to meet local housing needs.

Planning Assessment

- 7.56 For detailed building heights of each reserved matter phase, please refer to the submitted Design and Access Statements and the following submitted drawings:
- RM1: Proposed Storey Heights Plan (180641-TOR-RMN1-MP-P006_RevA)
 - RM4: Phase 4 Storey Heights Plan - A/B/C (22.1706.2010_RevC / 22.1706.201_RevC / 22.1706.2012_RevC)
- 7.57 The outline permission was supported by an illustrative masterplan that was endorsed by the Council prior to the outline consent on the basis that the outline masterplan demonstrated a sustainable layout for future housing delivery to come forward at appropriate densities that were in keeping with local character and scale.
- 7.58 The Design Code built on the vision set out within the outline masterplan and was based on further robust site analysis and engagement with ADC officers, Ford/Yapton/Climping parishes, and the broader community. The Design Code identifies and promotes the establishment of 7 x unique and complementary character areas that would deliver a range of housing types at varying density ranges, both of which help the site transition from semi-rural to urban and in accordance with the outline permission approved 'Land Use and Density' parameter plan.
- 7.59 As per the approved 'Land Use & Density' parameter plan, the outline permission allows for residential densities across three separate density zones ranging from lower density (20-35dph), medium density (27.5-42.5dph), and higher density (35-50dph). To demonstrate compliance with the approved density ranges, supporting analysis is provided within each Code Compliance Statement that support the RM1 and RM4 submissions.

- 7.60 Further, the approved 'Land Use & Density' parameter plan allows for building heights typically ranging from 2-2.5 storeys and up to a maximum 3-storeys across the majority of the residential areas, but up to 4 storeys within the Local Centre.
- 7.61 The Design Code adds further detail in relation to acceptable building heights within each respective character area as follows:
- RM1:
 - St. Mary's Meadow: Up to 2 storeys
 - Ford Lane: Up to 2 storeys
 - Arun Way & Landings Green: Predominately 2 storeys (But up to 3 storeys permitted along key movement/green corridors or to prominent frontages and corners)
 - RM4:
 - Ryebank Park: Up to 2 storeys
 - Runway Park: Predominately 2 storeys (But up to 3 storeys permitted along key movement/green corridors or to prominent frontages and corners)
 - Runway: Predominately 2.5 storeys (But up to 3 storeys permitted along key movement/green corridors or to prominent frontages and corners)
- 7.62 All of the proposed buildings within both RM1 and RM4 phases are within the acceptable height ranges detailed in the outline permission and Design Code, with the only buildings that are 3-storeys in height being blocks of flats which are located along the primary spine road and in key marker locations where they assist with site-wide legibility. Where appropriate, a range of building heights have been proposed to create interest and variety along street scenes.
- 7.63 On the basis of the above, the proposed building heights are considered compliant with the Design Code, Local Plan Policy D DM1 and Arun's Design Guide and are therefore considered acceptable in policy and design terms.

Plot Layout, Setbacks & Separation Distances

Policy Summary

- 7.64 ADC Design Guide G.03 (Layout & Plot Sizes) states that minimum back-to-back separation distances should be 21m provided by rear garden depths of 10.5m. In exceptional circumstances, smaller distances may be acceptable subject to other aspects achieving acceptable standards, for example, applying the 25 Degree Rule where neighbouring buildings should be below a vertical 25° line when taken from rear habitable windows.
- 7.65 For back-to-side separation distances, G.03 states these should be informed by applying the 45 Degree Rule from the centre point of the lowest window closest to the side boundary, then drawing a line 45° upwards and another 45° outwards toward the side boundary.

- 7.66 ADC Design Guide H.04 (Residential Outdoor Amenity & External Spaces) states private amenity spaces should be of an appropriate size and shape to be usable and enjoyable. Private rear gardens should have a minimum depth of 10.5 metres, and balconies a minimum of 3sqm of usable space. Building frontages should generally be set back at least 2 metres from the plot boundary to mark defensible space. However, smaller set-backs that demonstrate sufficient design quality may be accepted in specific circumstances, where justified. Figures 144-148 of the Design Guide further detail the following separation distance expectations (in particular between habitable windows):
- Back-to-back: 21.0m
 - Back-to-side: 14.0m
 - Back-to-boundary (POS): 12.0m
 - Front-to-front: 16.0m
 - Private rear gardens: 10.5m
 - Private front gardens: 2.0m
 - Balconies: max. 2.0m from building frontage – min. 3.0sqm usable space – min. 17.0m balcony-to-balcony distance
- 7.67 Notwithstanding the building separation/setback expectations stated above, ADC Design Guide J.02 (Scale & Massing) does suggest further mitigation measures that should be considered where min. separation distances cannot be achieved:
- Building separation distances between habitable rooms are 21m or above - No additional measures are needed to achieve a reasonable level of privacy.
 - Building separation distances between habitable rooms are between 16-20m – Design initiatives such as offsetting windows and landscape screening should be used.
 - Building separation distances between habitable rooms are 15m or less – Multiple design initiatives will likely be necessary, such as staggered façades, recessed balconies, mature landscaping and louvres on windows.

Planning Assessment

- 7.68 For detailed assessment of garden depths for each reserved matter phase, please refer to the following submitted drawings:
- RM1: Proposed Garden Depths and Separation Distance Plans (180641-TOR-RMN1-MP-P007_RevA)
 - RM4: Phase 4 Garden Depths and Areas Plan – A/B/C (22.1706.2040D / 22.1706.2041D / 22.1706.2042D)
- 7.69 Overall, the proposed RM1 and RM4 applications demonstrate broad compliance with ADC Design Guidance in relation to rear garden depths and separation distances as set out above. House types have been arranged to ensure there is no direct overlooking thereby ensuring good quality residential amenity and privacy is provided.

- 7.70 Notwithstanding, there are minor instances where compliance for rear garden depths has not been achieved across both phases. In instances where strict adherence has not been achieved for rear garden depths or separation distance (ex. smaller mews streets) this is generally limited to <1.0m, and garden layouts have been set out to still ensure that well sized gardens of c. 80->100sqm are provided to ensure future residents still have high-quality and usable space that is not impacted by potential privacy issues. The minor non-compliances allow for an optimised site layout and the delivery of housing, whilst ensuring high-quality private residential amenity has been provided.
- 7.71 Across both phases, all proposed houses meet minimum front garden depths, with additional depth and variations provided across the various block structures and character areas to add interest to the emerging townscape.
- 7.72 On the basis of the above, and to ensure strategic land delivers optimised levels of housing, it is considered the proposed developments are generally compliant with the Arun Design Guide and are therefore acceptable in policy and design terms.

Appearance

Policy Summary

- 7.73 Local Plan Policy D DM1 (Aspects of Form and Design Quality) states development should make the best possible use of the available land by reflecting or improving upon the character of the site and the surrounding area, in terms of building materials (colour, texture), and design features. Development should also demonstrate a high standard of architectural principles, use of building materials, craftsmanship and hard and soft landscaping to reflect the local area.
- 7.74 FNP Policy H1 (Quality of Design) states proposals for new housing or extension or alteration of existing housing must be of high quality and designed to be sympathetic to the local design style and contribute positively to the environment.

Planning Assessment

- 7.75 For detailed assessment of building types and materiality details for each reserved matter phase, please refer to the submitted Design & Access Statements and the following submitted drawings:
- RM1: Proposed Materials Plan (180641-TOR-RMN1-MP-P010_RevA)
 - RM4: Proposed Material Plan – A/B/C (22.1706.2030_RevE / 22.1706.2031_RevE / 22.1706.2032_RevE)
- 7.76 In general, the northern neighbourhood has been envisioned to become ‘A tribute to Ford’s rural character’ retaining a more traditional appearance that connects the proposals back to historic Ford and the existing development along Ford Lane.
- 7.77 The appearance of the southern neighbourhood has been envisioned to deliver a more contemporary design approach, reflecting ‘the legacy of the airfield past’ and providing a distinctive development edge adjacent to Yapton and Climping.

- 7.78 The appearance of each character area will be created by the interaction of a number of different design principles. These include:
- Boundary treatments;
 - Materials;
 - Roof forms;
 - Openings;
 - Entrances and thresholds;
 - Architectural features; and
 - Landscape features.
- 7.79 Within the Design Code a materiality matrix is provided (see Table 8.1) which provides detailed guidance on how each character area and individual buildings shall be treated, including subtle variations across each area that will assist with transitions and ensure each area is appropriate for the local character and context. This has been translated into the proposed materiality set out within the submitted Design and Access Statements and associated proposed Materials Plans.
- 7.80 Each of the RM1 and RM4 phases have been designed in compliance with Table 8.1 of the Design Code to ensure a varied, yet cohesive and contextually appropriate design approach both site-wide and for each given character area.
- 7.81 Given compliance with the Design Code across both phases, the overall design approach for each RM will deliver high-quality architectural design in accordance with Local Plan Policy D DM1 and Arun's Design Guide and is therefore acceptable in policy and design terms.

NDSS / Internal layouts

Policy Summary

- 7.82 ADC Local Plan Policy D DM1 states buildings should be flexible to future adaptation, including the changing needs of occupants (for example ageing users, family circumstances), changes in wider work and social trends, and be able to accommodate potential differing uses of public space.
- 7.83 ADC Local Plan Policy D DM2 (Internal Space Standards) requires internal spaces to be an appropriate size to meet the requirements of all occupants and their changing needs. Nationally Described Space Standards (NDSS) will provide guidance. ADC's Design Guide J.08 (Internal Space Standards) similarly requires all new houses to meet NDSS standards.
- 7.84 ADC's 'Accommodation for Older People and People with Disabilities' Guidance note (2020) also requires on schemes of 51 units or greater, that 50% of units to be designed to m4(2) standard- Access and adaptable dwellings, plus two additional units (4%) to be designed to m4(3) wheelchair accessible.
- 7.85 The S106 also requires 50% of all affordable dwellings to be m4(2) and 4% to be m4(3) compliant site-wide across all phases. There is no requirement for the minimum provisions to be complied with for each individual phase.

Planning Assessment

- 7.86 In accordance with the above, all units within both phases meet NDSS requirements, and each phase comprises minimum 50% of units meeting M4(2) standards, and 4% meeting M(4)3 standards. The remaining units all meet M(4)1 standards and is therefore acceptable in policy and design terms.

Transport & Access

Policy Summary

- 7.87 NPPF Paragraphs 115 and 116 states that development should only be refused on highways grounds if there would be an unacceptable impact on highway safety, or if the residual cumulative impacts on road users would be severe. On this basis all applications should a) give priority first to pedestrian and cyclist movements and secondly to public transport; b) address the needs of people with disabilities; c) create safe, secure and attractive places; d) allow for efficient delivery and access for goods and services; and e) be designed to accommodate EV/low emissions vehicles.
- 7.88 Local Plan Policy T SP1 (Transport and Development) states the Council will support development which is s
- 7.89 Local Plan Policy T DM1 (Sustainable Travel and Public Rights of Way) states proposals must be located in locations with easy access to public transport, existing pedestrian/cycle networks, contributes to the extension of public transport services, makes provision for cycling and pedestrian infrastructure in accordance with WSCC standards, including cycle parking, and contributes to the provision of a joined cycle/PROW network.
- 7.90 Local Plan Policy SA1 (Ford) - Masterplan to include cycleways that link the new and Planning Assessment existing community to new facilities.
- 7.91 FNP Policy GA1 (Footpath and cycle path network) - Support will be given to proposals that improve and extend existing cycle path network.
- 7.92 To ensure developments function effectively, ADC's Parking Standards SPD recommend the following vehicular and cycle parking provision for developments within Parking Behaviour Zone 2:
- Car Parking:
 - 1B-3B units – 2 spaces/unit
 - 4B+ units – 3 spaces/unit
 - Garages count as 0.5 allocated space subject to being min. 6m x 3m internally
 - Cycle Parking:
 - 1B-2B houses – 1 space/unit
 - 3B+ houses – 2 spaces/unit
 - 1B-2B flats – 1 space/unit
 - 3B+ flats – 1 space/unit

- Visitor Parking:

- 20% of the total number of residential units

7.93 ADC's Parking Standards SPD includes various principles, namely 1) that parking provision should be sufficient to accommodate demand – whilst exploiting the potential for sustainable travel options where possible; 2) that expected levels of vehicle ownership should be determined taking account of dwelling size (rooms); unit type (houses or flats); unit tenure (private/affordable), parking provision (allocated or unallocated), control/enforcement (charges etc.); 3) 'Active' EV parking be provided for min. 20% of all parking spaces (100% for houses with driveways/garage), with all remaining spaces being 'Passive' spaces; 4) in some locations, limiting parking provision is a potential solution to ensure sustainable travel options are promoted, subject to implementation of a travel plan, there are high-levels of access for non-vehicular modes of travel, and comprehensive parking controls.

7.94 ADC's Parking Standards SPD 'Parking Guidance 3.2' further states:

To satisfy the promotion of sustainable travel modes and choices it is considered that a 10% variation below the target parking demand value be allowed where appropriate travel option provision is provided including travel plans, public transport contributions (e.g. through section 106 contributions involving Strategic Allocations and Community Infrastructure Levy once adopted, for other non-strategic sized developments for offsite infrastructure of a strategic nature) and other sustainable travel initiatives. This is also as a result of increasing affordability issues resulting in young people staying with parents for longer.

7.95 ADC Design Guide I.01 (Car Parking) highlights that car parking should be provided through a variety of solutions which are appropriate to their context, the size and nature of development and the order of the street on which they're located. On-street parking is supported in various arrangements and care should be taken to avoid car parking dominating street scenes where parking is provided on-plot. Rear parking courts should only be provided where other options are exhausted and should be small scale and overlooked for safety.

7.96 Regarding accessible parking, the Design Guide notes that accessible parking should comprise a min. 5% of parking provision, with accessible parking provided on-plot for any accessible dwellings where possible and no greater than 20m travel distance if provided off-plot.

7.97 For EV parking, ADC Parking Standards SPD and Design Guide I.02 (Electric Vehicles) states EV parking should be provided for 100% of houses with driveways and/or garages, and for all other spaces that 30% are provided with 'active' provision. Where 'active' charging spaces cannot be provided, these should be provided as 'passive' spaces to enable conversion in future.

7.98 Cycle parking should be appropriate and conveniently located. Residential cycle storage should be sheltered, and public short-stay parking (preferably Sheffield Stands) should integrate with the natural and built environment and provide for a range of bicycle types.

Planning Assessment

- 7.99 For detailed assessment of the overall transport strategy for each reserved matter phase, please refer to the following submitted Transport Technical Notes and Travel Plans prepared by Ardent and the applicable RM1/RM4 Design and Access / Code Compliance Statements:
- IRM_03.B - Transport Technical Note (ref. 2205771-R11C)
 - RM1N_03.B - Transport Technical Note (ref. 2205771-R12C)
 - RM4S_03.B - Transport Technical Note (ref. 2205771-R14C)
 - RM1N_04.B - Travel Plan (ref. 2205771-R13D)
 - RM4S_04.B –Travel Plan (ref. 2205771-R15D)
- 7.100 Based on the delivery of the proposed site-wide movement and connectivity infrastructure, alongside the various off-site sustainable infrastructure improvements, the proposed development will deliver significant public benefits in terms of promoting sustainable travel behaviours and a lowered reliance on private vehicles for future residents.
- 7.101 To promote sustainable travel within the site, the following measures have been incorporated into both the Design Code masterplan and each individual reserved matters application:
- Creation of a permeable site layout and block structure which provides priority for sustainable modes of transport and connectivity over vehicular movements, including integrated connections to the foot and cycleway network surrounding the site.
 - The primary spine road through the site, as well as the access junctions onto Ford Lane and Yapton Road, have been designed to accommodate bus services through the site in future.
 - Services and facilities such as education, retail, leisure and community will be provided within a future local centre phase that will assist with minimising trip generation and promotes sustainable travel behaviours.
 - The layout of the site will emphasise sustainable access to the local centre. The central location of facilities will minimise journey distances for all residents, and the parking strategy for these buildings will discourage the use of cars for short journeys.
 - The street network within the site will encourage low speed streets, suitable for movement by all modes of travel, particularly walking and cycling. Shared pedestrian/cycleways are provided along the primary spine road, secondary streets and within key public open spaces.
 - High quality cycle parking will be provided for each residence, in accordance with ADC standards.
- 7.102 The Design Code also sets out the overall movement framework/street typologies across the site and details the locations where active travel connections within each RM phase must integrate with the surrounding movement network. In terms of street hierarchy and typologies, all street typologies have all been designed in accordance with ADC Design Guide SPD, LTN 1/20, Manual for Streets, and WSCC highways standards and comprise the following:

- Primary Street (spine road);
- Secondary Street;
- Tertiary Street; and
- Shared Surface (Mews Streets).

7.103 The surrounding area has an interconnected network of sustainable travel opportunities, from a network of footways and footpaths to on-road and off-road cycle paths. NCN Route 2 runs along the A259 to the south of the site and the Arun Active Travel Connectivity Study Report (2020) stated that the wider site, Ford Strategic Site SD8 is “located in an ideal location to encourage sustainable travel”.

7.104 In addition, bus routes 500 and 700 Coastliner operate along Yapton), to the southwest of the site along Yapton Road (with potential re-routing through the site in future). These two services operate at a frequency of approximately four services an hour, in each direction. These services operate between Littlehampton and Chichester. Ford Railway Station is also located within close proximity to the north of the site, with regular services between Brighton, Bognor Regis, London Victoria, Southampton and Chichester.

7.105 Pedestrian footways and several key cycle connections are provided throughout the RM phases to give priority to sustainable modes of travel, in particular, along the primary spine road, along Arun Way (PROW 363), through Landings Green (which leads to future off-site pedestrian/cycle upgrades up to Ford Station), Ryebank Park, Runway Park, and along the RM4 secondary street (which will comprise the diverted PROW 175).

7.106 Key non-vehicular connections in and out of the wider site within the IRM, RM1 and RM4 phases are provided in accordance with outline parameter plans as follows:

- Landings Green –pedestrian/cycle connections at NW and SE corners, with the SE connection providing onward pedestrian/cycle connection to Ford Road/Ford Station.
- Ryebank Park – pedestrian/cycle connections at SW and SE corner to connect to Yapton Road and Yapton Road/Horsemere Green, respectively.
- Runway Park – pedestrian/cycle connection in SE corner onto Horsemere Green Lane
- Runway Park – pedestrian footway connection onto PROW 175

7.107 In addition to the above connectivity measures within the site, off-site, a comprehensive package of infrastructure improvements has been secured via the outline S106 to improve the sustainable travel infrastructure in the area surrounding the wider development site. The key off-site improvements include:

- The upgrading of various pedestrian crossings within proximity to the site.
- The realignment of Ford Road to enable a 2.5m – 3.0m shared pedestrian / cycleway to be provided between the junction of Ford Lane and Ford Railway Station along the western side of the carriageway.

- Provision of on-carriageway cycle lane demarcation in Yapton from Rollaston Park through to Burndell Road / Bilsham Road Junction / Yapton Village Hall and hatched green markings across junctions along the length of the route to denote the presence of cyclists and cyclist priority.
- Widening of the existing footway on the eastern side of Church Lane to provide a 2.5m – 3.0m wide pedestrian/cycleway and to connect between Horsemere Green Lane with A259 Yapton Road.
- Widening of the carriageway at Church Lane / Horsemere Green Lane junction to accommodate a 3.0m wide path on the approach to a dropped kerb and tactile paving crossing.
- Connection into the existing/diverted NCN Route 2 pedestrian /cycleway to the north of the A259 carriageway.
- Footpath from Ford Road down to the River Arun.

- 7.108 For vehicular parking provision, the site-wide strategy proposes a mixed parking solution, comprising predominantly in-curtilage front garden or tandem parking, but also within garages, in small groups of perpendicular on-street parking bays, and for flatted dwellings within communal parking courts. Visitor parking is typically provided on-street and has been integrated with public realm/street trees to ensure parking arrangements do not lead to street scenes being overly dominated by vehicles.
- 7.109 WSCC guidance splits West Sussex into 5 x Parking Behaviour Zones (PBZs) based on proximity to alternative transport modes and local amenities of which only three PBZs are applicable within ADC – noting the site is located in PBZ 1.
- 7.110 As agreed with WSCC highways during pre-application discussions, the scale, land uses and betterments to public transport, walking and cycling infrastructure included within the consented development means that it is more appropriate to apply the Arun parking standards for PBZ 4 to the flats specifically. This results in a standard of 1 space for each 1 and 2-bed apartments.
- 7.111 Both RM1 and RM4 phases include the provision of flats – typically located along the primary road – where the proposed bus link will travel along through the site (which also connects through to Ford railway station), as well as nearby proximity of the flatted units to continuous pedestrian and cycleways through the site, and to the wider area. The flats are part of a wider development, which includes the provision of a range of complimentary land uses within easy walking and cycling distance, further reducing the requirement for future residents to require a car.
- 7.112 We have reviewed the Nomis 2021 Travel to Work data for Output Area Arun 006, which covers the site area, Yapton and Ford which confirms the following mode share for residents in the local area (discounting work from home data), which concludes that an estimated 78% of movements are associated with private vehicle travel.

Mode	Mode Share
Train	2%
Bus, minibus or coach	2%
Taxi	0%
Motorcycle, scooter or moped	1%
Driving a car or van	78%
Passenger in a car or van	5%
Bicycle	4%
On foot	6%
Other method of travel to work	2%

Figure 6 - Travel to Work Data (Nomis 2021)

- 7.113 Further, a review of an analysis of Census data for the Yapton E05009822 Ward that the site is located within shows that existing residents within flats (of all sizes) only own cars at a rate of 0.88 cars per dwelling.
- 7.114 In accordance with Local Plan Policy T SP1, which supports development that is designed to reduce the need to travel by car, improves public transport accessibility, provides safe access to the road network and prioritises pedestrian and cycle movements, plus that the proposed developments provides appropriate sustainable travel options, including travel plans, public transport contributions and other sustainable travel initiatives, that there is robust justification to apply paragraph 3.2 of the ADC Parking Standard SPD which allows a 10% reduction in parking provision site-wide.
- 7.115 We note Travel Plans have been submitted along both the RM1/RM4 submissions which sets out further initiatives that will be undertaken to further reduced the reliance on vehicular travel – with a target of reducing the mode share of single occupancy vehicle use by 10% against current observed levels.
- 7.116 ADC and WSCC parking standards require 2 allocated parking spaces per 1-3-bedroom dwellings and 3 allocated parking spaces for dwellings of 4+bedrooms. Visitor parking needs to be provided at a ratio of 20% of total residential dwellings. Additionally, a minimum 5% of parking provision should be accessible parking, with accessible parking provided on-plot for any accessible dwellings where possible and no greater than 20m if provided off-plot.
- 7.117 We summarise the proposed vehicular and cycle parking provision for each phase below in **Table 14**:

Table 14 – Proposed RM1/RM4 Vehicle Parking Provision

Vehicular Parking Type	RM1 (North)	RM4 (South)
Allocated Housing Spaces	538	633

Garage Spaces (at 0.5 provision)	31	41.5
Allocated Accessible Spaces (houses & apartments)	18	22
Visitor Spaces	82	82
Visitor Accessible Spaces	5	5
Allocated (Apartment) Spaces	91	39
Service (Sub-station) Spaces	3	2
Total - Allocated Residential Parking	678	735.5
Total - Allocated Residential & Visitor Parking	765	822.5
Total (Incl. Service)	768	824.5

7.118 We set out below in **Table 15** and **Table 16**, the parking requirements against both ADC and WSCC standards, for both RM1 and RM4 respectively. RM1 (765 x total allocated & visitor spaces) and RM4 (822.5 x total allocated & visitor spaces) each provide 93.5% and 94.1% respectively against allocated and visitor ADC Parking Standards targets (when excluding allocated service (i.e. sub-station) parking), meaning both phases are within ADC's 10% variation allowance.

Table 15 - RM1: ADC/WSCC Parking Requirements

Dwelling Type	Number of Units	ADC Parking Requirement	ADC 90% Compliant	WSCC Parking Requirement
1 Bed apartment	42	84	76	42
2 Bed apartment	30	60	54	30
2 Bed house	41	82	74	82
3 Bed house	160	320	288	320
4 Bed house	63	189	170	189
5 Bed house	5	15	14	15
Total Allocated	341	750	676	678
Visitor Allocation (20% of dwellings)		68	61	68
Total incl. Visitor		818	737	746

Table 16 – RM4: ADC/WSCC Parking Requirements

Dwelling Type	Number of Units	ADC Parking Requirement	ADC 90% Compliant	WSCC Parking Requirement
1 Bed apartment	15	30	27	15
2 Bed apartment	18	36	32	18
2 Bed house	71	142	128	142
3 Bed house	164	328	295	328

Dwelling Type	Number of Units	ADC Parking Requirement	ADC 90% Compliant	WSCC Parking Requirement
4 Bed house	82	246	221	246
5 Bed house	7	21	19	21
Total Allocated	357	803	722	770
Visitor Allocation (20% of dwellings)		71	64	71
Total incl. Visitor		874	786	841

- 7.119 In addition to the above, the proposed development will deliver policy compliant EV vehicle charging infrastructure to private dwellings and as required by Part S of the Building Regulations.
- 7.120 Policy compliant levels of cycle parking provision is either provided within cycle stores within rear gardens, within garages, or for apartment developments within dedicated cycle stores.
- 7.121 On the basis set out above, we consider the proposed developments to be in accordance with Local Plan Policies T SP1, T DM1, SA 1, GA 1, ADC's Parking Standards SPD and the Arun Design Guide and are therefore acceptable in policy and highways terms.

Delivery & Servicing (Waste)

Policy Summary

- 7.122 Policy WM DM1 (Waste Management) states new residential development will be permitted where it has been to be designed to ensure that kerbside collection is possible for municipal waste vehicles and where appropriate, communal recycling bins and safe bin storage areas.
- 7.123 ADC Design Guide H.07 (Waste/ Recycling Storage Facilities & Utilities) requires development to:
- Provide sufficient space to store the volume of bins and extra capacity for all recycling waste types necessary to meet the needs of occupants, in a convenient and safe location
 - Integrate waste storage facilities into the existing environment through consideration of placement, form and materials.
 - Ensure convenient access for service vehicles, providing sufficient space to avoid the need for frequent turning.
 - Integrate utilities with the public realm, locating cable runs underground, although not in conflict with tree roots, and ensuring that above-ground elements are placed discreetly.
 - Provide convenient utilities maintenance access

Planning Assessment

7.124 For detailed assessment of the overall waste/delivery strategy, including swept path analyses for each reserved matter phase, please refer to the following submitted Transport Technical Notes prepared by Ardent and the following submitted drawings:

- IRM_03.B - Transport Technical Note (ref. 2205771-R11C)
- RM1N_03.B - Transport Technical Note (ref. 2205771-R12C)
- RM1N: Proposed Refuse Strategy Plan (ref. 180641-RMN1-MP-P009_RevA)
- RM4S_03.B - Transport Technical Note (ref. 2205771-R14C)
- RM4S: Proposed Refuse Strategy Plans - A/B/C (22.1706.2050_C / 22.1706.2051_C / 22.1706.2052_C)

7.125 As detailed within the above referenced submission documents, all residential plots have been designed to ensure compliance with Local Plan Policy WM DM1 and Arun's Design Guide and are therefore acceptable in in policy terms.

Drainage and Flood Risk

Policy Summary

7.126 Policy W DM3 (Sustainable Urban Drainage Systems) - To increase the levels of water capture and storage and improve water quality, all development must identify opportunities to incorporate a range of Sustainable Urban Drainage Systems (SUDS), appropriate to the size of development, at an early stage of the design process.

7.127 Proposals for both major and minor development proposals must incorporate SUDS within the private areas of the development in order to provide source control features to the overall SUDS design. These features include:

- Green roofs
- Permeable driveways and parking
- Soakaways
- Water harvesting and storage features including water butts.

7.128 Proposals for major development must also integrate SUDS within public open spaces and roads, reflecting discussion with the appropriate bodies. SUDS must therefore be integrated into the overall design of a development and must:

- Contribute positively to the appearance of the area, integrating access to allow maintenance of existing watercourses and the system.
- Effectively manage water (including its quality)
- Accommodate and enhance biodiversity by making connections to existing Green Infrastructure assets and
- Provide amenity for local residents (ensuring a safe environment)
- Retain the existing drainage network of the site and the wider area,

- Be maintained in perpetuity, supported through a Maintenance and Management Plan/Regime, including its financing, agreed with the Local Planning Authority.

7.129 In order to ensure that SUDS discharge water from the development at the same or lesser rate, as prior to construction, developers must:

- Follow the hierarchy of preference for different types of surface water drainage disposal systems as set out in Approved Document H of the Building Regulations and the SUDS manual produced by CIRIA.
- Undertake up to six months groundwater monitoring within the winter period.
- Undertake winter percolation testing in accordance with BRE365.
- The proposed drainage system must be designed to ensure that there is no flooding on a 1 in 30-year storm event.

7.130 The design must also take account of the 1 in 100-year storm event plus 30% allowance for climate change, on stored volumes, to ensure that there is no flooding of properties or the public highway or inundation of the foul sewerage system. Any excess flows must be contained within the site boundary, and within designated storage areas.

7.131 FNBHP Policy EH4 (Surface Water Management) requires appropriate surface water management measures for development proposals to ensure that the risk of flooding both on-site and downstream is not increased. Consideration should be given to the use of sustainable drainage alternative to conventional drainage and must be approved by the LPA and WSCC as LLFA.

7.132 Design Guide Policy K.04 (Flood Risk & Drainage) states:

- Locates new development in areas at lowest risk of flooding (whether existing or future)
- Does not increase flood risk and decreases risk wherever possible, providing appropriate protection throughout the lifetime of the development.
- Demonstrates consideration of appropriate SuDS, and aims for these to provide additional amenity or ecological benefits.
- Demonstrates flood resilience for a 1/100 year event, in line with BREEAM 2018 Pol 03.
- Manages pollution risk entering water-bodies or sensitive receptors from stormwater. runoff.
- Avoids increasing impermeable land cover, or demonstrates how this is offset.
- Retains existing drainage features and flood defences, or compensates for their loss and integrates drainage features and flood defences with the surrounding environment.

7.133 Design Guide Policy E.01 (Using the Site's Features & Natural Resources – use of SUDS) states SuDS should be used in order to mitigate flood risk, improve water quality and provide attractive, multi-purpose spaces. These systems should be taken into account from an early design stage via incorporation into the proposed Landscaping Strategy.

7.134 SuDS can be adapted to suit any site and can contain different and various components, with multiple applications and benefits to achieve sustainable water management. When creating a SuDS network, various factors need to be considered at different scales:

- Masterplan Scale: water demand, efficiency, space provision, river corridors, habitats, soil, landscape, geology
- Site Scale: existing natural drainage patterns, runoff rates, storm water features, amenities, “place making” and landscape character
- Building Scale: water efficiency features, green roofs, living walls, water butts etc.
- Drainage Hierarchy (at source infiltration)
- Site specific mitigation (water-butts)
- Swale typologies
- Connection to SUDS basins (IRM)
- Flood Risk

Planning Assessment

7.135 The surface water drainage strategy approved at outline stage (F/4/20/OUT) was divided into a northern parcel, which was drained via infiltration using a series of infiltration basins, and a southern parcel, which utilised swales, detention basins and flow control devices before discharging into drainage ditches in the private land to the west.

7.136 Subsequent ground investigations including winter groundwater monitoring were undertaken by Omnia Ltd between December and April 2024 (refer to *Infrastructure Reserved Matters Technical Note (2205771-R16-C)* Appendix C). The investigations recorded groundwater levels as shallow as 0.24 m bgl. As a result, infiltration systems were discounted as a method of disposal of surface water site-wide.

7.137 In line with the drainage discharge hierarchy outlined in CIRIA C753, it is proposed to attenuate flows within SuDS detention basins prior to discharging surface water into adjoining ordinary watercourses via 3 x outfalls.

7.138 Where feasible, priority has been given to above-ground SuDS features which provide amenity, biodiversity and water quality benefits. SuDS features have been designed to accommodate flows up to the 1 in 100 year plus 40% climate change.

7.139 The site-wide IRM surface water drainage strategy separates the site into 8 sub-catchments (6 x Drainage Areas and 2 x roundabouts) based on the natural topography of the site. Surface water runoff from each plot is conveyed either via a piped drainage network (serving the northern half of the site) or grassed drainage swales (serving the southern half) into 5 x strategic detention basins, prior to discharging at the equivalent mean greenfield runoff rate (Qbar). Flows will be controlled by a number of vortex flow controls.

7.140 The detention basins have been designed to include the following design characteristics:

- Maximum 1 in 3 side slopes;
- Minimum 300mm freeboard (over the 1 in 100 year + 40%CC water level);
- Water level (during a 1 in 100 year + 40% CC event) not exceeding 2.0m;
- Impermeable geo-membrane to prevent groundwater ingress;
- Forebays and bioretention features; and
- Permanent water feature to enhance amenity and ecological benefits.

- 7.141 Site-wide Micro drainage Network Modelling results demonstrate there is not flooding onsite for all rainfall events up to the 1 in 100 year +40%CC, and there is no surcharging in the network during the 1 in 2-year event.
- 7.142 Following discussions with the LLFA, a sensitivity check was carried out using a Volumetric Run-off Coefficient (CV) value of 1. The results demonstrate that the additional site-wide runoff is stored within the available freeboard of the detention basins. All outfalls have been modelled as fully surcharged up to the flood levels (assumed as top of bank levels) in a 1 in 100 years + 40% Climate Change event.
- 7.143 The foul drainage strategy has been designed to convey foul flows to 3 x proposed adoptable pumping stations (Pump Stations 1, 2 and 3), which will in turn discharge into a fourth pump station (Terminal Pump Station 4). Foul Pump Station 4 will pump flows to Ford wastewater treatment works to the east of the site.
- 7.144 It is anticipated that the drainage systems described in this IRM application will be adopted by a private adoption company. A Maintenance and Management Plan is included within the submitted Drainage Strategies for each reserved matters application.
- 7.145 The site-wide drainage strategy has been informed by the drainage hierarchy and robustly engineered to ensure on-site surface water drainage can be managed and maintained within the site boundaries and achieves a greenfield runoff rate. Thereby confirming no surface water flood risks would be introduced beyond the site boundaries. As demonstrated within the supporting Drainage Technical Notes for each RM phase, the drainage strategies are considered acceptable in policy and drainage terms.

Public Open Space & Landscape

Policy Summary

- 7.146 Local Plan Policy SD8 (Ford) requires proposals to maintain a visual separation between Ford and Yapton and between Climping and Ford through the layout of the development and provision of landscaped open space.
- 7.147 Ford Neighbourhood Plan Policy SA1 (Ford Airfield) requires the proposals to incorporate a network of open spaces, which are required to include parks and gardens, natural and semi-natural green space, amenity space (including village greens), sports pitches, children and young persons' play spaces and allotments, all connected via a network of footpath and cycleways that will link the new and existing community to new facilities.

- 7.148 Local Plan Policy C SP1 (Countryside) requires careful management and consideration along the rural-urban fringe where significant new development is proposed, and consideration should be taken towards landscape and biodiversity enhancement, woodland management, recreational provision and access into the countryside.
- 7.149 Local Plan Policy GI SP1 (Green Infrastructure and Development) requires major development to be designed to protect and enhance existing Green Infrastructure assets, and the connections between them, in order to ensure a joined up Green Infrastructure Network. The Green Infrastructure Network must be protected from light pollution to ensure that areas defined by their tranquillity are protected from the negative effects of light in development.
- 7.150 Local Plan Policy SA1 (Ford Airfield) requires existing mature vegetation to be retained where possible.

Planning Assessment

- 7.151 A minimum of 16.44ha of net public open space must be provided site wide, in accordance with the approved Green and Blue Infrastructure Parameter Plan and to accord with Arun District Council's Open Space, Playing Pitches & Indoor & Built Sports Facilities SPD (2020).
- 7.152 Our principal underlying strategy across all phases and as secured by the Design Code has been to maximise the ecological value of the Arun Way greenway pocket parks, Landings Green, Runway Park and Ryebank Park providing connectivity between proposed habitat types within the broader green infrastructure (these areas are detailed in the RM4 and Infrastructure applications). The residential streets are supplementary to this but are also seen as an important element of the ecology strategy and also to maximising the visual amenity of the development.
- 7.153 Against the outline and policy compliant provision of 16.44ha of net public open space, the Design Code secures a total provision of 18.85ha of net public open space (2.41ha in excess of requirements). A full breakdown the future site-wide provision is provided below in **Table 17**:

Table 17 - Design Code Compliant Public Open Space Provision

	STANDARDS (ha)	PROVISION
Site boundary		84.48 ha
<i>Based on 1500 dwellings</i>		
POS types		
Amenity green space	1.98	3.04 ha
Natural and Semi-Natural green space	5.94	6.89 ha
Parks & Gardens	2.64	2.85 ha
Allotments	0.83	0.83 ha
Outdoor Sports	3.23	3.42 ha
Play provision	1.82	1.82 ha
TOTAL (POS)	16.44	18.85 ha

7.154 The three submitted RM phases will provide the majority of these required public open spaces and will include Landings Green, St. Mary's Meadow, Arun Way, Runway Park, and Ryebank Park. Each of these green spaces will deliver a biodiverse rich planting scheme, with significant new hedgerow and tree planting, alongside new formal and informal play areas, recreational trails, plus important connectivity habitat and transport corridors.

7.155 Below in **Table 18** we set out the total POS quantum that will be delivered by the initial three phases – plus remaining provision to be delivered as part of future phases:

Table 18 - Proposed POS Provision

POS Types	Site-Wide Compliant POS Provision	RM1 Delivery	RM4 Delivery	IRM Delivery	Total Proposed Provision	Remaining Provision Required
Amenity Green Space	1.980ha	-	0.172ha	0.957ha	1.129ha	0.851ha
Natural and Semi-Natural Green Space	5.940ha	-	0.236ha	5.769ha	6.005ha	(-0.065ha)
Parks & Gardens	2.640ha	-	2.777ha	-	2.777ha	(-0.137ha)
Allotments	0.830ha	-	0.830ha	-	0.830ha	(0.000ha)
Outdoor Sports	3.230ha	-	-	-	-	3.230ha
Play Space	1.820ha	-	0.270ha	0.650ha	0.920ha	0.900ha
Total POS	16.440ha	-	4.285ha	7.376ha	11.661ha	4.779ha

7.156 The proposed tree planting strategy includes a wide variety of native and ornamental species that help reflect the local native trees found on site and offer a variety of crown shapes and forms from broad rounded/oval and wide pyramidal crowns to columnar and upright form. The tree species selected are in accordance with the Design Code Table 5.5, supplemented with additional species to create strong seasonal interest and a variety of leaf colour and forms.

7.157 The proposals are therefore in accordance with Local Plan Policies SD8 C SP1, GI SP1 and SA1 as well as FNP Policy SA1.

Play Space

Policy Summary

7.158 Policy D DM1 (Aspects of form and design quality) requires play areas to be located along public routes and spaces to prevent crime.

7.159 FNP Policy SA1 (Ford Airfield) states local areas for play shall include areas designed as “village greens” as well as sports pitches – to be incorporated into the masterplan.

7.160 Design Guide Policy H.03 (Open Spaces) states:

- Play areas should consider the intended age of the children using the space and, should be accessible to all within this age bracket.

- These areas may be formal - marked and laid out for recreational activities e.g sports pitch or informal

7.161 SPD12 (Open Space, Playing Pitches & Indoor & Built Sports Facilities) requires play space to adhere to the 10 principles for designing successful play spaces, these are:

- Bespoke
- Well located
- Make use of natural elements
- Provide a wide range of play experiences
- Inclusive to all
- Meet community needs
- All children of different ages to play together
- Build in opportunities to experience risk and challenge
- Sustainable and appropriately maintained
- Allow for change and evolution

Planning Assessment

7.162 Of the minimum 16.43ha required net open space, 1.815ha of formal play space must be provided throughout the site. The Play Strategy for the whole site is set out within the approved Design Code within section 3, whereas details of the individual play area designs are provided within the submitted landscape drawings for each phase of development.

7.163 As set out within the Design Code, the site-wide play strategy has been developed in accordance with the design requirements and principles set out in the Planning and Design for Outdoor Sport and Play (2008) guidance produced by Fields in Trust, Play England's 'Design for Play' and Arun District Council's Open Space, Playing Pitches & Indoor & Built Sports Facilities SPD (2020).

7.164 The Design Code stipulates that play spaces must include a variety of play experiences, including opportunities for informal play for all age groups. The play provision for each future development phase should therefore provide a complimentary mix of play experiences as part of a site wide strategy to ensure the needs of all groups are adequately met.

7.165 The LEAPs and NEAPs shall be located within the principal open spaces along the eastern edge of the site and at key nodes along the principal cycle network including at the western end of Arun Way, on the edge of Yapton.

7.166 The location of each LEAP and NEAP shall therefore be located where activity levels are highest and in prominent locations on clear desire lines. The purpose of such is to encourage use of the play areas and maximise natural surveillance but also encourage integration of the existing and new communities.

- 7.167 The LAPs provision is proposed to be brought forward in small clusters across the site, with play provision to be distributed along a network of designated spaces and must include designated LAPs, play/fitness trails and natural play areas.
- 7.168 For each play space, the play provision must be unique, high quality and bespoke, responding to and enhancing the character of the landscape in which it sits and contributing to the developments overall sense of place.
- 7.169 To ensure that the play strategy provides a diverse variety of play experiences, a high-quality play environment and also targets key skills developments, an overarching theming strategy has been set out to ensure that all play areas are complimentary.
- 7.170 Each distinct play zone must comprise a complimentary mix of play experiences and themes. Figure 3.16 within the Design Code sets out in more detail the theme of each zone, including the types of experiences supported, the character of the spaces and the targeted skills which the play areas are intended.
- 7.171 In terms of specific play provision delivered for each of the three submitted RM applications, a series of play space landscape plans have been submitted – noting at this stage these provide the indicative details of the play provision, which will be developed into full detailed design as part of a future detailed design exercise alongside an appointed play specialist and other relevant stakeholders:
- RM4
 - 1 x LAP comprising 300sqm in area within the neighbourhood park.
 - 1 x LEAP comprising 1,800sqm of play provision, plus a 400sqm sensory trail within Runway Park.
 - IRM
 - cluster of 3 x LAPs, comprising 1,500sqm in area plus a 200sqm seniors fitness trail within St. Mary's Meadow.
 - cluster of 4 x LAPs, comprising 1,370sqm in area within Ryebank Park.
 - cluster of 2 x LAPs comprising 600sqm in area, within Arun Way.
 - 1 x LAP comprising 1,400sqm in area (to comprise a large natural play area inclusive and a parkour trail of c. 200sqm) within Landings Green.
 - 2 x LEAP comprising 1,800sqm in area within Landings Green.
- 7.172 The play areas are located along public routes and spaces to prevent crime in accordance Policy D DM1 and the spaces consider the intended ages of children using them and are accessible to all within their respective age brackets, in accordance with Design Guide Policy H.03. Further, all play spaces are provided with the required minimum buffer distances from nearby noise receptors.
- 7.173 Each play area has been laid out in accordance with the Design Code and the design has sought to adhere to the 10 principles for designing successful play spaces set out within SPD12. The detailed layout of each defined play area/play trail will be secured via planning condition and further developed alongside specialist play consultants prior to implementation.

Trees

Policy Summary

- 7.174 Local Plan Policy ENV DM4 (Protection of Trees) states that to ensure development is planned to take a comprehensive view of tree issues at an early stage of the design process and that development does not have a negative impact on trees, proposals should be informed by the following:
- Land and tree surveys
 - A tree constraints plan
 - An arboricultural impact assessment to include a tree protection plan and arboricultural method statement
- 7.175 FNP Policy SA1 (Site Allocation) requires existing mature vegetation to be retained where possible.
- 7.176 FNP Policy EH1 (Protection of Trees and Hedgerows) Development proposals must be designed to incorporate biodiversity within and around developments and enhance ecological networks, seeking to retain wherever possible trees of arboricultural and amenity value and hedgerows.
- 7.177 ADC Design Guide E.02 (Landscape Structures & Trees) seeks wherever possible to retain and incorporate trees and hedgerows of value and that their long-term health is protected by avoiding negative impacts that may be caused by development through site design, avoidance of RPAs and targeted tree protection measures.

Planning Assessment

- 7.178 Where feasible, the existing landscape is to be retained and incorporated into the site-wide and reserved matters specific layouts. This approach will assist with integrating the development parcels into the existing landscape structure.
- 7.179 Some tree/hedgerow removals are required to support the reserved matters applications, which includes the removal of the tree groups surrounding the vacant highways works depot north of Arun Way within RM1 (G1004, G1005, G1006, and G1041) and the existing hedgerows along PROW 175 within RM4 (H1178, H1180, H1183, and H1186). All these hedgerows and tree groups are Category C and were assessed against their removal within the outline to allow development to come forward.
- 7.180 Further, some partial removal of individual trees along the western side of the primary spine road and along Arun Way where the roads/junctions are proposed to intersect, and around pumping stations as required. Lastly, some short lengths of tree/hedgerow removals will be required along boundaries where new/expanded connection points are proposed across all three phases.
- 7.181 For the IRM, most of the significant boundary tree cover will be retained, and none of the trees being removed within the redline boundary serve as prominent mature tree features in the wider setting.

- 7.182 In the case of RM1, the majority of significant boundary trees will be preserved other than where new access points are to be provided. And again, none of the trees being removed have been identified as being prominent within the wider setting.
- 7.183 Regarding tree removals planned for phase RM4, all affected trees are of low quality, exhibiting limited potential to enhance local character due to their poor condition and small size.
- 7.184 Each of the three submitted AIA and Method Statements concludes that the proposed developments will not cause an unacceptable or adverse impact on the character and appearance of the area from a tree perspective.
- 7.185 To supplement retained trees and enhance local character, the submitted landscape proposals as part of each RM, include tree planting schemes to ensure a net increase in tree coverage across the site. This includes in accordance with the outline parameter plans, substantial woodland buffer along the southern and eastern edges of the site near Horsemere Green Lane which will ensure no intervisibility and to protect against coalescence between neighbouring villages. Once fully established and mature, this woodland screening will ensure no adverse impacts to visual receptors as assessed as per to the outline ES.
- 7.186 In addition, significant edge tree planting around the edge of the site to assist the development incorporate into the surrounding semi-rural edges.
- 7.187 Overall, the limited loss of trees and hedgerows, when considered against the new landscaping and planting proposal, will more than sufficiently offset the loss of the existing species across the site.
- 7.188 The proposals are therefore in accordance with Local Plan Policy ENV DM4 and FNP Policies SA1, EH1, as well as ADC Design Guide Policy E.02 and are therefore considered acceptable in policy terms.

Ecology & Biodiversity

Policy Summary

- 7.189 Local Plan Policy ENV SP1 (Natural Environment) encourages and promote the preservation, restoration and enhancement of biodiversity and the natural environment for the protection of both designated and non-designated sites. Where possible it shall also promote the creation of new areas for habitats and species
- 7.190 Local Plan Policy ENV DM5 (Development and Biodiversity) requires schemes to seek to achieve a net gain in biodiversity and protect existing habitats on site. They shall also however incorporate elements of biodiversity including green walls, roofs, bat and bird boxes as well as landscape features minimising adverse impacts on existing habitats (whether designated or not).
- 7.191 Development schemes shall also be appropriately designed to facilitate the emergence of new habitats through the creation of links between habitat areas and open spaces. Together, these provide a network of green spaces which serve to reconnect isolated sites and facilitate species movement.

- 7.192 Where there is evidence of a protected species on a proposed development site, planning applications shall include a detailed survey of the subject species, with details of measures to be incorporated into the development scheme to avoid loss of the species. This involves consideration of any impacts that will affect the species directly or indirectly, whether within the application site or in an area outside of the site, which may be indirectly affected by the proposals. All surveys shall be carried out at an appropriate time of year and shall be undertaken by a qualified and, where appropriate, suitably licensed person. All developments shall have regard to Natural England's standing advice for protected species.
- 7.193 ADC Design Guide E.03 (Biodiversity) states developments must incorporate measures to ensure that there is no net loss of biodiversity and demonstrate how or where enhancement and/ or expansion of habitats can be integrated. This should include retaining, integrating and creating ecological corridors between existing and proposed green and other suitable spaces to allow the movement of animals and continuation of viable populations.

Planning Assessment

- 7.194 Each of the three RM submissions includes comprehensive Ecological Protection and Enhancement Plans. For further details, please refer to:
- IRM_02.B_Ecological_Protection_Enhancement_Plan (v5)
 - RM1_06_B_Ecological_Protection_Enhancement_Plan (v5)
 - RM4_06_B_Ecological_Protection_Enhancement_Plan (v5)
 - RM1/4_11.A_Biodiversity Net Gain Assessment
- 7.195 The Ecological and Protection Plans detail the habitat creation and enhancement measures designed to support protected or notable species while enhancing the overall biodiversity and ecological habitats within each phase. Based on UES' assessment and enhancement and protection plans, the proposed landscape enhancement measures, which include the provision of native species rich hedgerows, native tree planting, native dense scrub, woodland structure planting, long grass margins, wildflower grassland and SuDS. The assessment concludes that each reserved matters phase will deliver a net gain for biodiversity.
- 7.196 Further, UEEC completed a Biodiversity Net Gain Assessment in April 2023 based on the proofing layout that was prepared by the applicants prior to site acquisition that was based on the approved outline masterplan. The assessment was based on the 2023 Defra Biodiversity Metric 4.0 and a survey of the site carried out on 13th April 2023 by a suitably qualified and experienced ecologist. This assessment calculated net gain of +33.28 BU for area habitats, equivalent to +19.23%, and calculated net gain of +6.32 BU for linear habitats, equivalent to +28.29%, associated with the proofing layout development proposals.
- 7.197 A supporting letter of comfort has been provided by UEEC confirming they have reviewed the currently proposed development RM layouts and landscaping details listed below and compared them to the details on which we based their 2023 assessment. They have concluded there is a high degree of similarity between the two sets of proposals and, if the assessment were to be re-run against the current proposals, it is likely that a similar quantum of net gain would be achieved.

- 7.198 As set out above the proposals are in accordance with Local Plan Policies ENV SP1 and DM5 as well as Policy E.03 of the ADC Design Guide and are therefore considered acceptable.

Lighting

Policy Summary

- 7.199 Local Plan Policy GI SP1 (Green Infrastructure and Development) requires the Green Infrastructure Network to be protected from light pollution to ensure that areas defined by their tranquillity are protected from the negative effects of light in development.
- 7.200 Local Plan Policy QE DM2 (Light pollution) requires the application to be accompanied by a lighting scheme prepared according to the latest national design guidance and relevant British Standards publications. Outdoor lighting schemes will be considered against the following criteria:
- No adverse impact on neighbouring uses or the wider landscape, particularly with regard the South Downs International Dark Sky Reserve designation;
 - Light levels being the minimum required for security and working purposes;
 - Minimising the potential glare and spillage; and
 - The degree to which outdoor lighting can be powered by on-site renewable sources
- 7.201 FNP Policy EH8 (Light Pollution) requires applications to demonstrate through the submission of a lighting scheme that the lighting has been specifically designed to minimise the impact of the lighting on the night sky.
- 7.202 Condition 15 of the outline planning permission requires a scheme for external lighting for each phase to be submitted to and approved by ADC prior to the commencement of development (excluding demolition) of that phase. The scheme is required to ensure that the lighting is sensitive to bats and comply with the Institution of Lighting Professionals Guidance Note for the Reduction of Obtrusive Light.

Planning Assessment

- 7.203 The submitted lighting strategy (drawing reference: OP242906LD20281) as part of the Infrastructure RM outlines the installation details for external lighting along the Spine Road. It demonstrates the consideration of bat sensitivity and adherence to the Institution of Lighting Professionals' Guidance Note for the Reduction of Obtrusive Light. In addition, a limited amount of additional street lighting is proposed along the secondary/tertiary street networks of RM1/RM4. Ecologically sensitive light specifications will be subject to detailed design and secured through the discharge of Condition 15 of the outline permission prior to commencement of development.
- 7.204 Furthermore, low-level bollard lighting is proposed along PROW 363 within Landings Green which is the primary pedestrian/cycle connection route through to Ford Station. Ecologically sensitive light specifications will be subject to detailed design and secured through the discharge of Condition 15 of the outline permission prior to commencement of development.

7.205 Therefore, the proposed lighting measures submitted as part of the Infrastructure RM align with Local Plan Policies GI SP1 and QE DM2, FNP Policy EH8, and Condition 18 of the outline permission.

Energy & Sustainability

Policy Summary

7.206 Paragraph 164 of the NPPF sets out what is expected from new developments when considering strategies to mitigate climate change, requiring new development to be planned in ways that avoid increased vulnerability to the range of impacts from climate change and can help to reduce greenhouse gas emissions.

7.207 Within the adopted ADC Local Plan, Policy ECC SP2 (Energy and Climate Change Mitigation) requires all new residential and commercial development to be energy efficient and demonstrate how they will:

- Achieve energy efficiency measures that reflect the current standards applicable at the time of submission;
- Use design and layout to promote energy efficiency; and
- Incorporate decentralised, renewable and low carbon energy supply systems, for example small scale renewable energy systems such as solar panels.

7.208 Furthermore, Policy ECC SP2 requires all major development to produce 10% of the total predicted energy requirements from renewable or low carbon energy generation on site, unless it can be demonstrated that this is unviable.

7.209 Part G of the Building Regulations(68) requires new homes to reach an optional standard of 110 litres/person/day.

7.210 Condition 26 of the outline planning permission (ref: F/4/20/OUT) states:

“At least 10% of the energy supply of the development shall be secured from decentralised and renewable or low carbon energy sources. Details of how the energy reductions will be achieved shall be submitted and secured as part of any RM application for each phase as defined by the Phasing Strategy under condition 5”.

7.211 It should also be noted that Part L 2021, introduced in June 2022, represents a 31% reduction in CO₂ emissions compared to Part L1 2013. Another step-change is expected in the Future Homes Standard which will represent a further 75-80% CO₂ reduction from 2025.

Planning Assessment

7.212 For further information please refer to the following submitted statements:

- RM1_07.B_Energy and Sustainability Statement
- RM4_07.B_Energy and Sustainability Statement

- 7.213 These reports have thoroughly reviewed the standards contained within the Approved Document L 2021. A 'Fabric First' approach has been proposed, that prioritises improvements to the fabric of the dwellings to avoid unnecessary energy demand and consequent CO₂ reduction.
- 7.214 Proposed improvements including insulation specification, efficient building services, a reduction in thermal bridging and unwanted air leakage paths and further passive design measures will enable the relevant standards to be met, whilst building in low energy design and future climate resilience to the design and construction of the dwellings for RM1 and RM4.
- 7.215 In addition, highly efficient ground source heat pumps will be installed to all dwellings within RM1 and RM4, to meet space heating and domestic hot water demand in order to meet the projected ADL 2025 regulatory standards and the 10% of energy demand provided by renewable sources.
- 7.216 Calculations based on a sample range of house types in RM1 and RM4 demonstrate that through implementing the aforementioned strategies, including the addition of highly efficient ground source heat pumps, the calculated as-designed emissions are reduced by 70.44% over ADL 2021 and by 80% over the ADL 2013 regulatory standards when the TER is adjusted manually for RM1 and 70.46% over ADL 2021 and by 80% over the ADL 2013 regulated standards for RM4. This demonstrates alignment with the projected requirement for ADL 2025.
- 7.217 Further analysis shows that 83.50% of the predicated energy demand for RM1 and 83.31% for RM4 is met through renewable or low carbon renewable energy, thereby meeting the 10% requirements for low-carbon/renewable energy to be provided as required by Policy ECC SP2 (Energy and Climate Change Mitigation).
- 7.218 Furthermore, as it is proposed to deliver a highly efficient ground source heat pump to deliver all space heating and hot water demand, the development scheme contributes positively towards keeping energy costs low for occupants and aligning with the future homes standards and expected regulatory changes to be introduced in 2025.
- 7.219 For the twenty-one sample SAPs completed for RM1 and RM4, all houses achieve EPC B ratings, with only the flats achieving EPC C ratings.
- 7.220 It has also been demonstrated within the Energy and Sustainability statements that the calculated water consumption could equate to a maximum internal water consumption of 108.25 litres/occupier/day for RM1 and RM4, therefore offering an improvement on the maximum of 110 litres/occupier/day allowable by Part G of the Building Regulations 2010.
- 7.221 As detailed above, the proposals are therefore in accordance with the requirements of Policy ECC SP2 of the ADC Local Plan and in accordance with condition 26 (Decentralised and Renewable or Low Carbon Energy) of the outline planning permission.

Noise

Policy Summary

- 7.222 Policy D DM1 (Aspects of form and design quality) requires applications for development to have minimal impact to users and occupiers of nearby property and land by avoiding unacceptable noise and disturbance.
- 7.223 Condition 25 of the outline planning permission requires a scheme detailing noise sources and proposed mitigation strategies relevant to that application, to be secured as part of any reserved matters consent.

Planning Assessment

- 7.224 Comprehensive noise surveys have been conducted for phases RM1 and RM4, both of which are considered to be low risk in accordance with ProPG Guidance. The main identified noise sources have been identified as being generated from neighbouring industrial uses – in particular Ford Industrial Estate and the Tyre Recycling Depot located along Ford Lane, plus road traffic noise generated from Yapton Road, Ford Lane and the future primary spine road.
- 7.225 In order to mitigate adverse noise impacts from neighbouring industrial uses, 4.0m high acoustic fencing is proposed around the boundaries of Ford Industrial Estate and the Tyre Recycling Depot along Ford Lane. As outlined within the IRM landscape strategy, both acoustic fences will be screened with appropriate landscape buffers to integrate the fencing into the development and reduce visual impacts generated by the fencing.
- 7.226 Following mitigation, for both RM1 and RM4 phases, the Noise Impact Assessment has demonstrated that noise from existing industrial uses and road traffic would not generate adverse internal or external impacts and acceptable internal and external noise environments will be achieved.
- 7.227 Where necessary the design of some dwellings that front the road noise sources will be able to control noise levels through a fixed window solution. It is important to note that windows will not be permanently sealed; residents will have the choice to open them, with the understanding that this may lead to a slight rise in noise levels. The risk of noise impact during overheating conditions within properties has been considered in accordance with Acoustics Ventilation and Overheating (AVO) guidance.
- 7.228 External sound levels in most private amenity spaces adhere to the recommended standards, though a few balconies facing the primary access road will marginally exceed the noise criteria. All public open spaces maintain external sound levels below 50dB, thereby ensuring that all residents will have access to either communal amenity spaces where external noise levels are within acceptable limits.
- 7.229 Consequently, the noise assessments for both RM1 and RM4 confirm the suitability of these sites for development, subject to the recommendations included in the reports. Therefore, it is considered that the requirements of Policy D DM1 and Condition 25 have been satisfactorily fulfilled.

Waste infrastructure

Policy Summary

- 7.230 West Sussex Waste Local Plan (WLP) was adopted by WSCC in April 2014 and covers the period up to 2031. Policy W10 (Strategic Waste Allocations) identifies the following key points:

- Part a) identifies 'Site north of Wastewater Treatment Works, Ford' to meet identified shortfalls in the transfer, recycling and recovery capacity.
- Part d) notes the site will be safeguarded from any development either on or adjoining the sites that would prevent or prejudice their development (in whole or in part) for the allocated waste management use or uses.

7.231 Following the submission of the three Reserved Matters (RM) applications, consultation responses were received from WSCC Minerals & Waste. These responses request the submission of an appropriately scaled Waste Infrastructure Statement response for each phase, specifically addressing potential issues related to odour, landscape screening, and noise associated with key existing waste sites and strategic waste allocations in the area. The full consultation response is provided in the RM consultation response tracker

Planning Assessment

- 7.232 In response to noise concerns, noise modelling has been conducted for specific operations, as outlined in the submitted technical note (ref. 2205771-R26). The modelling has been used to assess the extent and height of proposed barriers at the site.
- 7.233 Noise from the operations identified in the WSCC comments will be significantly lower than the requirements of the relevant planning conditions when assessed in accordance with BS4142. The proposed mitigation measures, which consider all local noise sources, will ensure acceptable internal and external amenity sound levels for dwellings. As a result, there will be no adverse impact from noise originating from nearby commercial and industrial operations.
- 7.234 No additional mitigation measures are required beyond those outlined in the noise assessment. Noise from the identified operations will not negatively affect the proposed dwellings at RM1 (North) and RM4 (South).
- 7.235 The noise barriers will consist of 4m high fences. This height is optimal for noise reduction while balancing other design considerations. Taller barriers would offer little additional acoustic benefit and would increase visual impact. Based on the technical note, the proposed barriers will achieve sufficient noise reduction.
- 7.236 With the noise barrier specifications and the mitigation measures in place, noise levels at the proposed dwellings will be adequately controlled, ensuring no adverse impact on future residents and safeguards the existing/consented neighbouring waste/industrial operations.
- 7.237 Furthermore, the proposed landscape strategy includes a variety of deciduous and evergreen species along waste/industrial use boundaries to ensure acceptable levels of visual screening will be achieved and to safeguard the existing/future use of neighbouring waste/industrial operations.
- 7.238 Regarding odour, the technical note (ref. 2205771-R26) confirms to WSCC that no “High Sensitive Receptor” properties are proposed within the 300m buffer area identified by Condition 35 of F/4/20/OUT.

- 7.239 As a result, no further odour assessment is required to demonstrate compatibility with the operation of the existing Wastewater Treatment Works in relation to the current separate Reserved Matters proposals.

Heritage

Policy Summary

- 7.240 Paragraph 210 of the NPPF states that in determining planning applications,
- ...local planning authorities should take account of: a) the desirability of sustaining and enhancing the significance of heritage assets and putting them to viable uses consistent with their conservation;*
- b) the positive contribution that conservation of heritage assets can make to sustainable communities including their economic vitality; and*
- c) the desirability of new development making a positive contribution to local character and distinctiveness.*
- 7.241 At the local level, Local planning authorities are required to take the significance of an asset into account when considering proposals, in order to avoid or minimise conflict between any aspects of the proposals and the conservation of the asset.
- 7.242 Policy H SP2, Strategic Site Allocations, SD8 applies to the development at Ford Airfield. The general policies concerning heritage are policies HER SP1 (The Historic Environment), HER DM1 (Listed Buildings), HER DM2 (Locally Listed Buildings or Structures of Character) and HER DM3 (Conservation Areas).
- 7.243 In addition, a specific policy applies to the former canal alignment, HER DM5 (Remnants of the Portsmouth and Arundel Canal) which states "*Development will be permitted where it would not adversely affect the remaining line and configuration of the Portsmouth and Arundel Canal and features along it.*"

Planning Assessment

- 7.244 As outlined within the submitted Heritage Statement (ref. 180641_1) several designated and non-designated heritage assets have been assessed against the impact of the proposed development to their setting and significance as follows:
- Atherington House, Ford Place, Southdown House and The Lodge, Ford Lane (LB1)
 - St Mary's Church, Yapton (LB20, grade I)
 - Manorial dovecote at Church Farm, Yapton (LB21)
 - Church Lane, Yapton, conservation area
 - The Portsmouth and Arundel canal (non-designated)
 - The western arm of runway 07/25 (non-designated)
 - The locally listed cottages on the site edges (LLB1-3)

- 7.245 The majority of identified heritage assets have been confirmed to not be within the setting of the proposed development and therefore there will be no effects on the significance of these assets.
- 7.246 Within the site are located the non-designated Portsmouth and Arundel Canal and the Western arm of runway 07/25, both of which the proposed Spine Road (IRM) will cross their alignments.
- 7.247 The proposals for the spine road include several details that mark the canal alignment through the site and are intended to signify the connection to the other sections that survive to the west within Yapton. The point where the road crosses the canal is differentiated from the rest of the route by the alteration in the paving materials used and roadside planting for the 4m wide former course of the canal, which will integrate into the future design of the linear park. This line extends west into the proposed woodland planting at the edge of the site, where a location is identified for canal-related public art. It is anticipated that the form and appearance of this would be approved by a condition on any approval.
- 7.248 The proposals for the spine road avoid fragmenting the c.350m section of the canal alignment that runs through the site and the IRM proposals do not prejudice future proposals to integrate the canal into the development as part of later phases. No effects on the non-designated heritage asset are predicted.
- 7.249 The proposals for the runway linear park are not part of this set of reserved matters applications. The point where the primary Spine Road crosses runway 07 was set by the outline permission and refined by the approved Design Code. The removal of the present runway hardstanding was approved under the outline consent.
- 7.250 A similar design approach is taken to differentiating the point where the Spine Road crosses the runway as is used for the canal alignment. The width of the road across the linear park is identified by a raised table traffic calming feature in different materials and the runway centre line is highlighted by a line of paving in a different colour. The low density and medium scale of the trees proposed on this section of the Spine Road is intended to avoid any impression of fragmentation or division of the space and to maintain the continuity of the linear views along the entirety of the runway within the development.
- 7.251 The reserved matters proposals do not prejudice future proposals to integrate the runway alignment into the development as part of later phases. No effects on the significance of the former airfield as a non-designated heritage asset are predicted.
- 7.252 The assessment of the effects of the proposed reserved matters IRM, RM1 and RM4 has concluded that the detailed proposals will not result in harm to the significance of any of the designated or non-designated heritage assets considered. The proposals also do not obstruct or prevent connections or otherwise undermine the Design Code and the intentions for the two non-designated heritage assets within the site as part of later phases of reserved matters and are therefore considered acceptable in policy and heritage terms.

8.0 Compliance with Outline Planning Permission

- 8.1 The outline planning permission (ref: F/4/20/OUT) included conditions which control how the reserved matters are to be brought forward. The outline planning permission is also subject to a S106 legal agreement which secured a number of obligations against future phases of development. An assessment of compliance is set out below:

Outline planning conditions

Condition Number	Summary of Wording of Planning Condition	Information Submitted and Compliance with Conditions
1 (Layout, Scale, Appearance and Landscaping Details)	Condition 1 requires the details of the layout, scale, appearance and landscaping ('the reserved matters') for each phase defined within the Phasing Strategy under Condition 5 to be submitted and approved in writing by ADC before any development in that phase begins	In accordance with Condition 1 of the Outline permission, details of the layout, scale, appearance and landscaping have been submitted for the first three reserved matters applications at the site (IRM, RM1 and RM4).
4 (Parameter Plans)	Condition 4 requires development to be carried out in accordance with the following approved plans: • Site Boundary Plan - RG-M-01 Rev. T • Potential Site Access Arrangement - 3 ARM 40m ICD Roundabout- ITB13091- GA-004 Rev. B • Potential Southern Vehicular Access from Yapton Road - ITB13091- GA-001 Rev. E • Ford Airfield Geometry - Eastern Access onto Ford Road - ITB13091-GA- 066 • Access and Movement Parameter Plan - RG-M-122 Rev. M • Green and Blue Infrastructure Parameter Plan - RG-M-121 Rev. N • Land Use and Density Parameter Plan - RG-M-123 Rev. L • Demolition plan - RG-M-107E	Both RM1 and RM4 layouts are proposed in accordance with the outline parameter plans in terms of location and quantum of public open space, SuDS infrastructure, access, densities (i.e. 20-50dph) and building heights (2-3 storeys).
5 (Phasing Strategy)	Condition 5 requires a phasing strategy to be submitted either prior to or concurrently with the submission of the first Reserved Matters application.	The site-wide phasing strategy has been approved on 17/12/2024 (ref. F/36/24/DOC).

Condition Number	Summary of Wording of Planning Condition	Information Submitted and Compliance with Conditions
7 (Design Code)	Condition 7 requires the submission of a Design Code for the whole application (excluding only the Employment Zone) to be submitted and approved prior to the submission of any reserved matters application.	tor&co submitted the Design Code on 30/07/24 (ref: F/10/24/DOC). The Design Code was prepared in consultation with the local community, ADC and WSCC officers and provided further details as how the site-wide development would come forward in accordance with Condition 4 (approved parameter plans), the outline Masterplan Document (July 2021), and the Arun Design Guide SPD. The Design Code was approved on 19/09/24.
15 (External Lighting)	Condition 15 requires a scheme for external lighting for each phase to be submitted to and approved by ADC prior to commencement of development (excluding demolition).	An indicative lighting scheme (drawing reference: OP242906LD20281) has been submitted as part of the Infrastructure RM. This outlines the installation details for external lighting along the spine road Detailed lighting schemes for each RM will be submitted prior to commencement of development.
17 (Ecological Protection and Enhancement Plan)	Condition 17 requires the submission and approval of an Ecological Management Plan prior to the commencement of development.	tor&co have submitted a discharge of conditions application containing an Ecological Management Plan concurrent with the RM submissions. Each subsequent phase of development will be required to submit details in accordance with Condition 18, which sets out phase specific ecological enhancement and protection plans.
18 (Ecological Protection and Enhancement Plan)	Condition 18 requires the submission of details for the delivery of the approved measures through the Ecological Protection and Enhancement Plan (Condition 17 – see above) to accompany each reserved matters application for each phase.	In accordance with condition 17, tor&co have formally submitted an Ecological Protection and Enhancement Plan alongside each reserved matters application detailing the habitat creation and enhancement measures which will promote protected or otherwise notable

Condition Number	Summary of Wording of Planning Condition	Information Submitted and Compliance with Conditions
		species and enhance the overall biodiversity and ecology of the site.
20 (Layout, Scale, Appearance and Landscaping Details)	Condition 20 requires the layout, scale, appearance and landscaping particulars to be submitted in accordance with Condition 1 for any phase.	In compliance with condition 20, we have submitted the following details: • A comprehensive design and layout for the allotments • The siting, design and external appearance of the buildings accompanied by a schedule of materials and finishes to be used. • Details and design of bus and public transport infrastructure • Details of above-ground infrastructure • A complete arboricultural survey for each of the first three phases • The detailed design of above-ground surface water drainage features, including levels and profiles and a programme of construction in accordance with the approved Design Code.
21 (Landscaping and Layout Particulars)	Condition 21 requires the landscaping and layout particulars to be submitted in accordance with Condition 1 for any phase.	In compliance with condition 21, we have submitted the following details: • Details of all existing trees and hedgerows on the land, showing which are to be retained and which removed; • Details of the positions, height, design, materials and type of boundary treatment to be provided; • Details of any proposed alterations in existing ground levels, and of the position of any proposed excavation,

Condition Number	Summary of Wording of Planning Condition	Information Submitted and Compliance with Conditions
		within the crown spread of any retained tree; - The detailed landscape design for the development including the layout and design of the public realm within the development; - Details of the play areas, public open spaces and new sports pitches, including construction specification - Indicative details of the surfacing, lighting, and signage of all footpaths, cycle routes and equestrian routes; - Details of the measures that will be undertaken to protect the public sewers crossing the site.
22 (Protected Tree Scheme)	Condition 22 requires a scheme for the protection of the retained trees within each phase to be submitted to and approved in writing by ADC prior to the commencement of development or other operations likely to affect trees.	In compliance with Condition 22, indicative tree removal plans for the initial three phases have been submitted as part of the Arboricultural Impact Assessments and Method Statements. These plans will be updated and submitted as part of a future Discharge of Condition application prior to commencement of development of each phase.
25 (Noise Impacts and Mitigation)	Condition 25 requires any reserved matters application to include a scheme setting out details of noise sources and proposed mitigation relevant to that application.	In accordance with condition 25, comprehensive noise surveys have been conducted for phases RM1 and RM4. Reports detailing the identified noise sources and the proposed mitigation strategies have been submitted as part of each application.
26 (Decentralised and Renewable or Low Carbon Energy)	Condition 26 requires the details of how at least 10% of the energy supply of the development will be secured from decentralised and renewable or low carbon energy sources to be submitted as part of	In accordance with condition 26, detailed reports have been submitted for phases RM1 and RM4, outlining how a minimum of 10% of the energy supply for each development will be sourced from decentralised and

Condition Number	Summary of Wording of Planning Condition	Information Submitted and Compliance with Conditions
	any reserved matters application for each phase.	renewable or low carbon energy sources. The report findings reveal that 88.65% of the predicted energy demand for RM1 and 89.89% for RM4 is met through renewable or low carbon energy generation as required by Policy ECC SP2 (Energy and Climate Change Mitigation).
35 (Odour Impacts)	Condition 35 requires any reserved matters application that includes proposals for high sensitivity receptors within 300m of the Activated Sludge Plant to be supported by appropriate observational evidence to demonstrate there would be no unacceptable odour impacts upon those high sensitivity receptors.	No development which includes high sensitivity receptors is proposed within 300m of the Activated Sludge Plant and is therefore not applicable.

S106 legal agreement

8.7 The requirements of the S106 relevant to this RM application comprise the following.

Schedule No.	Summary of Wording of Obligation	Information Submitted and Compliance with Obligation
Schedule 1 Clause 1.2 (Affordable Housing Scheme)	To submit as part of the Phasing Strategy the Affordable Housing Scheme for the Development for approval in writing by the District Council and not to Commence Development until the Affordable Housing Scheme has been submitted to and approved by the District Council in writing.	Affordable Housing Scheme included as part of Phasing Strategy submitted under standalone discharge of condition 5 application.
Schedule 1 Clause 1.3 (Affordable Housing Parcel Scheme)	Not to commence Development of any Dwellings on a Reserved Matters Area on which Affordable Housing Dwellings and First Homes are to be provided until an Affordable Housing Parcel Scheme for that Reserved Matters Area has been submitted.	Affordable Housing Parcel Scheme to be submitted for discharge prior to commencement.
Schedule 5 Clause 1.2 (Open Space Scheme)	Not to commence Development on any RMA which contains Open Space until the Open Space Scheme with that RMA has been submitted to and approved in writing by the District Council.	Open Space Scheme to be submitted for discharge prior to commencement.

Schedule No.	Summary of Wording of Obligation	Information Submitted and Compliance with Obligation
Schedule 5 Clause 2.2 (Play Areas Scheme)	Not to commence Development on any RMA which is to include a Play Area until a Play Area Scheme with that RMA has been submitted to and approved in writing by the District Council.	Play Areas Scheme to be submitted for discharge prior to commencement.
Schedule 8 Clause 2.2 (Highways Works Scheme)	Not to Commence Development until a Highway Works Scheme has been submitted to and approved in writing by the County Council provided that where a Highway Works Scheme is submitted to the County Council which is not approved a revised Highway Works Scheme shall, within 14 days of receipt of notice in writing from the County Council that the previous Highway Works Scheme is not approved, be submitted to the County Council for approval.	Highways Works Scheme to be submitted for discharge prior to commencement.
Schedule 8 Clause 5.1.1 (Travel Plan)	To submit the Travel Plan for approval to the County Council prior to Commencement of Development.	Detailed Travel Plans included with RM applications for information will be discharged prior to commencement of each phase.

9.0 Conclusions

- 9.1 The principle of development at the site was established by an outline planning permission for 1,500 new homes and access that was granted in July 2023 (ref: F/4/20/OUT). This principle is further supported by Local Plan Policy H SP2c (SP8 – Ford) and the Ford Neighbourhood Plan Policy SA1 (Ford Airfield).
- 9.2 In accordance with Condition 1 of the outline permission, this planning statement supports the submission of the first three reserved matters applications for the site: IRM, RM1 and RM4. These applications provide details of
- Layout
 - Scale
 - Appearance
 - Landscaping
- 9.3 The reserved matters submissions seek to comprehensively address a number of the conditions imposed on the outline permission, as set out in section 9.0 of this statement.
- 9.4 The proposals for IRM, RM1 and RM4 will deliver numerous significant public benefits, including:
- The delivery of 698 x homes – 341 x homes within RM1 and 357 x homes within RM4 – in a sustainable location that will make a significant contribution to the current housing land shortfall in the district, with a commitment to ensuring 30% of these homes being affordable housing. Indicative tenure mixes have been provided in accordance with the approved outline s106 agreement and are detailed as part of the embedded Affordable Housing Statement.
 - A diverse range of house types (including detached, semi-detached, terraced, bungalow and apartment blocks at key marker locations), sizes and tenures.
 - Thoughtfully designed variations in building heights, roof forms, ridge heights, setbacks, building lines and boundary treatments to ensure variation across the site to create a diverse townscape.
 - A landscape-led design prioritising generous high quality open spaces benefitting new and existing residents. These spaces will incorporate biodiverse rich planting schemes, significant new hedgerow and tree planting, formal and informal play areas, recreational trails, plus important connectivity habitats and transport corridors.
 - The provision of a new spine road facilitating safe vehicular from Ford Road at the north of the site and Yapton Road to the south of the site, as well as the promotion of a pedestrian and cycle friendly environment, with the impact of vehicles reduced as far as practicable.
 - Construction of sustainable homes that comply with Future Homes Standards to ensure energy efficiency.

- A network of SuDS attenuation basins and swales to serve the entire development, which form an important part of the landscape and biodiversity of the site.
- Proposals for site-wide biodiversity and green infrastructure enhancements, including a biodiverse and native landscape planting strategy, integrated bee/bird/bat boxes on houses, standalone bird/bat boxes, and insect and hedgehog nesting boxes.
- Economic benefits through construction activities and increased local population
- Support for community facilities and local services and facilities through population growth

9.5 As set out in this statement, the proposals have been designed in accordance with approved Design Code and parameter plans. The reserved matters applications have also undergone thorough consultation with ADC as part of a PPA prior to submission and subsequent amendments following consultee comments related to the original Sept 2024 RM submissions. Furthermore, we have engaged with West Sussex County Council (WSCC) concerning highway and drainage matters and have conducted public engagement events to help inform the design evolution of the site from local residents.

9.6 This statement has comprehensively assessed the compliance of the proposals with national and local policies. It is concluded that the proposals fully comply with both national and local policies. Therefore, we respectfully request that planning permission for the three RM applications be granted promptly, in accordance with paragraph 11d of the NPPF.

APPENDIX I – Indicative Affordable Housing Tenure Distribution Plans



1-bed apartment
2-bed apartment
2-bed house
3-bed house
4-bed house
5-bed house
* Affordable unit

Total no. of dwellings:
341

Total no. of affordable:
102 (30%)

First Homes
Shared Ownership
Affordable Rent

RM1								
Indicative Community Body Tenure Mix								
Bedrooms	No. of HA Units	%	First Homes (25%)	%	Affordable Rent (37%)	%	Intermediate (38%)	%
1 Bed apartment	44	43.1%	18	69.2%	15	38.5%	9	24.3%
2 Bed apartment	28	32.4%	8	30.8%	18	53.8%	4	16.2%
2 Bed house	5		0		3		2	
3 Bed house	23	22.5%	0	0.0%	3	7.7%	20	54.1%
4 Bed house	2	2.0%	0	0.0%	0	0.0%	2	5.4%
Total	102		26	25.5%	39	38.2%	37	36.3%



1-bed apartment

2-bed apartment

2-bed house

3-bed house

4-bed house

5-bed house

Affordable unit

Total no. of dwellings:
341

Total no. of affordable:
102 (30%)

First Homes



Shared Ownership

Affordable Rent


RM1								
Indicative Registered Provider Tenure Mix								
Bedrooms	No. of HA Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
1 Bed apartment	44	43.1%	18	69.2%	24	35.8%	0	0.0%
2 Bed apartment	28	32.4%	8	30.8%	22	40.3%	0	0.0%
2 Bed house	5		0		5		0	
3 Bed house	23	22.5%	0	0.0%	14	20.9%	9	100.0%
4 Bed house	2	2.0%	0	0.0%	2	3.0%	0	0.0%
Total	102		26	25.5%	67	65.7%	9	8.8%

2017年12月	2018年1月	2018年2月	2018年3月	2018年4月	2018年5月	2018年6月	2018年7月	2018年8月	2018年9月	2018年10月	2018年11月	2018年12月	2019年1月	2019年2月	2019年3月	2019年4月	2019年5月	2019年6月	2019年7月	2019年8月	2019年9月	2019年10月	2019年11月	2019年12月	2020年1月	2020年2月	2020年3月	2020年4月	2020年5月	2020年6月	2020年7月	2020年8月	2020年9月	2020年10月	2020年11月	2020年12月	2021年1月	2021年2月	2021年3月	2021年4月	2021年5月	2021年6月	2021年7月	2021年8月	2021年9月	2021年10月	2021年11月	2021年12月	2022年1月	2022年2月	2022年3月	2022年4月	2022年5月	2022年6月	2022年7月	2022年8月	2022年9月	2022年10月	2022年11月	2022年12月	2023年1月	2023年2月	2023年3月	2023年4月	2023年5月	2023年6月	2023年7月	2023年8月	2023年9月	2023年10月	2023年11月	2023年12月	2024年1月	2024年2月	2024年3月	2024年4月	2024年5月	2024年6月	2024年7月	2024年8月	2024年9月	2024年10月	2024年11月	2024年12月	2025年1月	2025年2月	2025年3月	2025年4月	2025年5月	2025年6月	2025年7月	2025年8月	2025年9月	2025年10月	2025年11月	2025年12月	2026年1月	2026年2月	2026年3月	2026年4月	2026年5月	2026年6月	2026年7月	2026年8月	2026年9月	2026年10月	2026年11月	2026年12月	2027年1月	2027年2月	2027年3月	2027年4月	2027年5月	2027年6月	2027年7月	2027年8月	2027年9月	2027年10月	2027年11月	2027年12月	2028年1月	2028年2月	2028年3月	2028年4月	2028年5月	2028年6月	2028年7月	2028年8月	2028年9月	2028年10月	2028年11月	2028年12月	2029年1月	2029年2月	2029年3月	2029年4月	2029年5月	2029年6月	2029年7月	2029年8月	2029年9月	2029年10月	2029年11月	2029年12月	2030年1月	2030年2月	2030年3月	2030年4月	2030年5月	2030年6月	2030年7月	2030年8月	2030年9月	2030年10月	2030年11月	2030年12月	2031年1月	2031年2月	2031年3月	2031年4月	2031年5月	2031年6月	2031年7月	2031年8月	2031年9月	2031年10月	2031年11月	2031年12月	2032年1月	2032年2月	2032年3月	2032年4月	2032年5月	2032年6月	2032年7月	2032年8月	2032年9月	2032年10月	2032年11月	2032年12月	2033年1月	2033年2月	2033年3月	2033年4月	2033年5月	2033年6月	2033年7月	2033年8月	2033年9月	2033年10月	2033年11月	2033年12月	2034年1月	2034年2月	2034年3月	2034年4月	2034年5月	2034年6月	2034年7月	2034年8月	2034年9月	2034年10月	2034年11月	2034年12月	2035年1月	2035年2月	2035年3月	2035年4月	2035年5月	2035年6月	2035年7月	2035年8月	2035年9月	2035年10月	2035年11月	2035年12月	2036年1月	2036年2月	2036年3月	2036年4月	2036年5月	2036年6月	2036年7月	2036年8月	2036年9月	2036年10月	2036年11月	2036年12月	2037年1月	2037年2月	2037年3月	2037年4月	2037年5月	2037年6月	2037年7月	2037年8月	2037年9月	2037年10月	2037年11月	2037年12月	2038年1月	2038年2月	2038年3月	2038年4月	2038年5月	2038年6月	2038年7月	2038年8月	2038年9月	2038年10月	2038年11月	2038年12月	2039年1月	2039年2月	2039年3月	2039年4月	2039年5月	2039年6月	2039年7月	2039年8月	2039年9月	2039年10月	2039年11月	2039年12月	2040年1月	2040年2月	2040年3月	2040年4月	2040年5月	2040年6月	2040年7月	2040年8月	2040年9月	2040年10月	2040年11月	2040年12月	2041年1月	2041年2月	2041年3月	2041年4月	2041年5月	2041年6月	2041年7月	2041年8月	2041年9月	2041年10月	2041年11月	2041年12月	2042年1月	2042年2月	2042年3月	2042年4月	2042年5月	2042年6月	2042年7月	2042年8月	2042年9月	2042年10月	2042年11月	2042年12月	2043年1月	2043年2月	2043年3月	2043年4月	2043年5月	2043年6月	2043年7月	2043年8月	2043年9月	2043年10月	2043年11月	2043年12月	2044年1月	2044年2月	2044年3月	2044年4月	2044年5月	2044年6月	2044年7月	2044年8月	2044年9月	2044年10月	2044年11月	2044年12月	2045年1月	2045年2月	2045年3月	2045年4月	2045年5月	2045年6月	2045年7月	2045年8月	2045年9月	2045年10月	2045年11月	2045年12月	2046年1月	2046年2月	2046年3月	2046年4月	2046年5月	2046年6月	2046年7月	2046年8月	2046年9月	2046年10月	2046年11月	2046年12月	2047年1月	2047年2月	2047年3月	2047年4月	2047年5月	2047年6月	2047年7月	2047年8月	2047年9月	2047年10月	2047年11月	2047年12月	2048年1月	2048年2月	2048年3月	2048年4月	2048年5月	2048年6月	2048年7月	2048年8月	2048年9月	2048年10月	2048年11月	2048年12月	2049年1月	2049年2月	2049年3月	2049年4月	2049年5月	2049年6月	2049年7月	2049年8月	2049年9月	2049年10月	2049年11月	2049年12月	2050年1月	2050年2月	2050年3月	2050年4月	2050年5月	2050年6月	2050年7月	2050年8月	2050年9月	2050年10月	2050年11月	2050年12月	2051年1月	2051年2月	2051年3月	2051年4月	2051年5月	2051年6月	2051年7月	2051年8月	2051年9月	2051年10月	2051年11月	2051年12月	2052年1月	2052年2月	2052年3月	2052年4月	2052年5月	2052年6月	2052年7月	2052年8月	2052年9月	2052年10月	2052年11月	2052年12月	2053年1月	2053年2月	2053年3月	2053年4月	2053年5月	2053年6月	2053年7月	2053年8月	2053年9月	2053年10月	2053年11月	2053年12月	2054年1月	2054年2月	2054年3月	2054年4月	2054年5月	2054年6月	2054年7月	2054年8月	2054年9月	2054年10月	2054年11月	2054年12月	2055年1月	2055年2月	2055年3月	2055年4月	2055年5月	2055年6月	2055年7月	2055年8月	2055年9月	2055年10月	2055年11月	2055年12月	2056年1月	2056年2月	2056年3月	2056年4月	2056年5月	2056年6月	2056年7月	2056年8月	2056年9月	2056年10月	2056年11月	2056年12月	2057年1月	2057年2月	2057年3月	2057年4月	2057年5月	2057年6月	2057年7月	2057年8月	2057年9月	2057年10月	2057年11月	2057年12月	2058年1月	2058年2月	2058年3月	2058年4月	2058年5月	2058年6月	2058年7月	2058年8月	2058年9月	2058年10月	2058年11月	2058年12月	2059年1月	2059年2月	2059年3月	2059年4月	2059年5月	2059年6月	2059年7月	2059年8月	2059年9月	2059年10月	2059年11月	2059年12月	2060年1月	2060年2月	2060年3月	2060年4月	2060年5月	2060年6月	2060年7月	2060年8月	2060年9月	2060年10月	2060年11月	2060年12月	2061年1月	2061年2月	2061年3月	2061年4月	2061年5月	2061年6月	2061年7月	2061年8月	2061年9月	2061年10月	2061年11月	2061年12月	2062年1月	2062年2月	2062年3月	2062年4月	2062年5月	2062年6月	2062年7月	2062年8月	2062年9月	2062年10月	2062年11月	2062年12月	2063年1月	2063年2月	2063年3月	2063年4月	2063年5月	2063年6月	2063年7月	2063年8月	2063年9月	2063年10月	2063年11月	2063年12月	2064年1月	2064年2月	2064年3月	2064年4月	2064年5月	2064年6月	2064年7月	2064年8月	2064年9月	2064年10月	2064年11月	2064年12月	2065年1月	2065年2月	2065年3月	2065年4月	2065年5月	2065年6月	2065年7月	2065年8月	2065年9月	2065年10月	2065年11月	2065年12月	2066年1月	2066年2月	2066年3月	2066年4月	2066年5月	2066年6月	2066年7月	2066年8月	2066年9月	2066年10月	2066年11月	2066年12月	2067年1月	2067年2月	2067年3月	2067年4月	2067年5月	2067年6月	2067年7月	2067年8月	2067年9月	2067年10月	2067年11月	2067年12月	2068年1月	2068年2月	2068年3月	2068年4月	2068年5月	2068年6月	2068年7月	2068年8月	2068年9月	2068年10月	2068年11月	2068年12月	2069年1月	2069年2月	2069年3月	2069年4月	2069年5月	2069年6月	2069年7月	2069年8月	2069年9月	2069年10月	2069年11月	2069年12月	2070年1月	2070年2月	2070年3月	2070年4月	2070年5月	2070年6月	2070年7月	2070年8月	2070年9月	2070年10月	2070年11月	2070年12月	2071年1月	2071年2月	2071年3月	2071年4月	2071年5月	2071年6月	2071年7月	2071年8月	2071年9月	2071年10月	2071年11月	2071年12月	2072年1月	2072年2月	2072年3月	2072年4月	2072年5月	2072年6月	2072年7月	2072年8月	2072年9月	2072年10月	2072年11月	2072年12月	2073年1月	2073年2月	2073年3月	2073年4月	2073年5月	2073年6月	2073年7月	2073年8月	2073年9月	2073年10月	2073年11月	2073年12月	2074年1月	2074年2月	2074年3月	2074年4月	2074年5月	2074年6月	2074年7月	2074年8月	2074年9月	2074年10月	2074年11月	2074年12月	2075年1月	2075年2月	2075年3月	2075年4月	2075年5月	2075年6月	2075年7月	2075年8月	2075年9月	2075年10月	2075年11月	2075年12月	2076年1月	2076年2月	2076年3月	2076年4月	2076年5月	2076年6月	2076年7月	2076年8月	2076年9月	2076年10月	2076年11月	2076年12月	2077年1月	2077年2月	2077年3月	2077年4月	2077年5月	2077年6月	2077年7月	2077年8月	2077年9月	2077年10月	2077年11月	2077年12月	2078年1月	2078年2月	2078年3月	2078年4月	2078年5月	2078年6月	2078年7月	2078年8月	2078年9月	2078年10月	2078年11月	2078年12月	2079年1月	2079年2月	2079年3月	2079年4月	2079年5月	2079年6月	2079年7月	2079年8月	2079年9月	2079年10月	2079年11月	2079年12月	2080年1月	2080年2月	2080年3月	2080年4月	2080年5月	2080年6月	2080年7月	2080年8月	2080年9月	2080年10月	2080年11月	2080年12月	2081年1月	2081年2月	2081年3月	2081年4月	2081年5月	2081年6月	2081年7月	2081年8月	2081年9月	2081年10月	2081年11月	2081年12月	2082年1月	2082年2月	2082年3月	2082年4月	2082年5月	2082年6月	2082年7月	2082年8月	2082年9月	2082年10月	2082年11月	2082年12月	2083年1月	2083年2月	2083年3月	2083年4月	2083年5月	2083年6月	2083年7月	2083年8月	2083年9月	2083年10月	2083年11月	2083年12月	2084年1月	2084年2月	2084年3月	2084年4月	2084年5月	2084年6月	2084年7月	2084年8月	2084年9月	2084年10月	2084年11月	2084年12月	2085年1月	2085年2月	2085年3月	2085年4月	2085年5月	2085年6月	2085年7月	2085年8月	2085年9月	2085年10月	2085年11月	2085年12月	2086年1月	2086年2月	2086年3月	2086年4月	2086年5月	2086年6月	2086年7月	2086年8月	2086年9月	2086年10月	2086年11月	2086年12月	2087年1月	2087年2月	2087年3月	2087年4月	2087年5月	2087年6月	2087年7月	2087年8月	2087年9月	2087年10月	2087年11月	2087年12月	2088年1月	2088年2月	2088年3月	2088年4月	2088年5月	2088年6月	2088年7月	2088年8月	2088年9月	2088年10月	2088年11月	2088年12月	2089年1月	2089年2月	2089年3月	2089年4月	2089年5月	2089年6月	2089年7月	2089年8月	2089年9月	2089年10月	2089年11月	2089年12月	2090年1月	2090年2月	2090年3月	2090年4月	2090年5月	2090年6月	2090年7月	2090年8月	2090年9月	2090年10月	2090年11月	2090年12月	2091年1月	2091年2月	2091年3月	2091年4月	2091年5月	2091年6月	2091年7月	2091年8月	2091年9月	2091年10月	2091年11月	2091年12月	2092年1月	2092年2月	2092年3月	2092年4月	2092年5月	2092年6月	2092年7月	2092年8月	2092年9月	2092年10月	2092年11月	2092年12月	2093年1月	2093年2月	2093年3月	2093年4月	2093年5月	2093年6月	2093年7月	2093年8月	2093年9月	2093年10月	2093年11月	2093年12月	2094年1月	2094年2月	2094年3月	2094年4月	2094年5月	2094年6月	2094年7月	2094年8月	2094年9月	2094年10月	2094年11月	2094年12月	2095年1月	2095年2月	2095年3月	2095年4月	2095年5月	2095年6月	2095年7月	2095年8月	2095年9月	2095年10月	2095年11月	2095年12月	2096年1月	2096年2月	2096年3月	2096年4月	2096年5月	2096年6月	2096年7月	2096年8月	2096年9月	2096年10月	2096年11月	2096年12月	2097年1月	2097年2月	2097年3月	2097年4月	2097年5月	2097年6月	2097年7月	2097年8月	2097年9月	2097年10月	2097年11月	2097年12月	2098年1月	2098年2月	2098年3月	2098年4月	2098年5月	2098年6月	2098年7月	2098年8月	2098年9月	2098年10月	2098年11月	2098年12月	2099年1月	2099年2月	2099年3月	2099年4月	2099年5月	2099年6月	2099年7月	2099年8月	2099年9月	2099年10月	2099年11月	2099年12月	2100年1月	2100年2月	2100年3月	2100年4月	2100年5月	2100年6月	2100年7月	2100年8月	2100年9月	2100年10月	2100年11月	2100年12月	2101年1月	2101年2月	2101年3月	2101年4月	2101年5月	2101年6月	2101年7月	2101年8月	2101年9月	2101年10月	2101年11月	2101年12月	2102年1月	2102年
----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	---------	---------	---------	---------	---------	---------	---------	---------	----------	----------	----------	---------	-------


Table 1 Relative Segregation by Income Level							
Income level	No. of MSU units	%	First income (20%)	%	Affordable (60%)	%	Intermediate (80%)
1 Bad	42	85.7%	18	69.2%	24	35.8%	0
2 Bad	30	34.3%	8	30.8%	5	40.3%	0
3 Bad	23	46.9%	0	0.0%	14	20.9%	9
4 Bad	2	4.1%	0	0.0%	2	3.0%	0
Total	127		26	20.5%	47	36.7%	9



First Homes



Shared Ownership



Affordable Rent

PHASE 5
INDICATIVE LAYOUT

KEY

AFFORDABLE UNITS

Affordable

SALE UNITS

Private

RM4


Indicative Community Body Tenure Mix

Bedrooms	No. of HA Units	%	First Homes (25%)	%	Affordable Rent (37%)	%	Intermediate (38%)	%
1 Bed apartment	12	11.1%	0	0.0%	12	29.3%	0	0.0%
2 Bed apartment	12	56.5%	0	100.0%	12	70.7%	0	12.5%
2 Bed house	49		27		17		5	
3 Bed house	27	25.0%	0	0.0%	0	0.0%	27	67.5%
4 Bed house	8	7.4%	0	0.0%	0	0.0%	8	20.0%
Total	108		27	25.0%	41	38.0%	40	37.0%

D	13-10-24	Layout Updated to Manual Site Plan Revision 7	JG
B	18-09-24	Layout Updated to Manual Site Plan Revision 2	CLP
A	12-09-24	Layout updated to add the new section	YC
Rev	Date	Amendment	Initials

Project:
PHASE 4, THE LANDINGS
FORD, WEST SUSSEX
Client:
VISTRY SOUTH EAST
Drawing:
PHASE 4
PROPOSED HOUSING TENURE PLAN - A
Drawing no:
22.1706.2080
Rev:
C
Scale: 1:1000
Date:
AUG 24
Drawn:
CLP
Checked:
GH

finc
finc Architecture Ltd
11-12, 13-14, 15-16, 17-18, 19-20, 21-22, 23-24, 25-26, 27-28, 29-30, 31-32, 33-34, 35-36, 37-38, 39-40, 41-42, 43-44, 45-46, 47-48, 49-50, 51-52, 53-54, 55-56, 57-58, 59-60, 61-62, 63-64, 65-66, 67-68, 69-70, 71-72, 73-74, 75-76, 77-78, 79-80, 81-82, 83-84, 85-86, 87-88, 89-90, 91-92, 93-94, 95-96, 97-98, 99-100, 101-102, 103-104, 105-106, 107-108, 109-110, 111-112, 113-114, 115-116, 117-118, 119-120, 121-122, 123-124, 125-126, 127-128, 129-130, 131-132, 133-134, 135-136, 137-138, 139-140, 141-142, 143-144, 145-146, 147-148, 149-150, 151-152, 153-154, 155-156, 157-158, 159-160, 161-162, 163-164, 165-166, 167-168, 169-170, 171-172, 173-174, 175-176, 177-178, 179-180, 181-182, 183-184, 185-186, 187-188, 189-190, 191-192, 193-194, 195-196, 197-198, 199-200, 201-202, 203-204, 205-206, 207-208, 209-210, 211-212, 213-214, 215-216, 217-218, 219-220, 221-222, 223-224, 225-226, 227-228, 229-230, 231-232, 233-234, 235-236, 237-238, 239-240, 241-242, 243-244, 245-246, 247-248, 249-250, 251-252, 253-254, 255-256, 257-258, 259-260, 261-262, 263-264, 265-266, 267-268, 269-270, 271-272, 273-274, 275-276, 277-278, 279-280, 281-282, 283-284, 285-286, 287-288, 289-290, 291-292, 293-294, 295-296, 297-298, 299-300, 301-302, 303-304, 305-306, 307-308, 309-310, 311-312, 313-314, 315-316, 317-318, 319-320, 321-322, 323-324, 325-326, 327-328, 329-330, 331-332, 333-334, 335-336, 337-338, 339-340, 341-342, 343-344, 345-346, 347-348, 349-350, 351-352, 353-354, 355-356, 357-358, 359-360, 361-362, 363-364, 365-366, 367-368, 369-370, 371-372, 373-374, 375-376, 377-378, 379-380, 381-382, 383-384, 385-386, 387-388, 389-390, 391-392, 393-394, 395-396, 397-398, 399-400, 401-402, 403-404, 405-406, 407-408, 409-410, 411-412, 413-414, 415-416, 417-418, 419-420, 421-422, 423-424, 425-426, 427-428, 429-430, 431-432, 433-434, 435-436, 437-438, 439-440, 441-442, 443-444, 445-446, 447-448, 449-450, 451-452, 453-454, 455-456, 457-458, 459-460, 461-462, 463-464, 465-466, 467-468, 469-470, 471-472, 473-474, 475-476, 477-478, 479-480, 481-482, 483-484, 485-486, 487-488, 489-490, 491-492, 493-494, 495-496, 497-498, 499-500, 501-502, 503-504, 505-506, 507-508, 509-510, 511-512, 513-514, 515-516, 517-518, 519-520, 521-522, 523-524, 525-526, 527-528, 529-530, 531-532, 533-534, 535-536, 537-538, 539-540, 541-542, 543-544, 545-546, 547-548, 549-550, 551-552, 553-554, 555-556, 557-558, 559-560, 561-562, 563-564, 565-566, 567-568, 569-570, 571-572, 573-574, 575-576, 577-578, 579-580, 581-582, 583-584, 585-586, 587-588, 589-590, 591-592, 593-594, 595-596, 597-598, 599-600, 601-602, 603-604, 605-606, 607-608, 609-610, 611-612, 613-614, 615-616, 617-618, 619-620, 621-622, 623-624, 625-626, 627-628, 629-630, 631-632, 633-634, 635-636, 637-638, 639-640, 641-642, 643-644, 645-646, 647-648, 649-650, 651-652, 653-654, 655-656, 657-658, 659-660, 661-662, 663-664, 665-666, 667-668, 669-670, 671-672, 673-674, 675-676, 677-678, 679-680, 681-682, 683-684, 685-686, 687-688, 689-690, 691-692, 693-694, 695-696, 697-698, 699-700, 701-702, 703-704, 705-706, 707-708, 709-710, 711-712, 713-714, 715-716, 717-718, 719-720, 721-722, 723-724, 725-726, 727-728, 729-730, 731-732, 733-734, 735-736, 737-738, 739-740, 741-742, 743-744, 745-746, 747-748, 749-750, 751-752, 753-754, 755-756, 757-758, 759-760, 761-762, 763-764, 765-766, 767-768, 769-770, 771-772, 773-774, 775-776, 777-778, 779-780, 781-782, 783-784, 785-786, 787-788, 789-790, 791-792, 793-794, 795-796, 797-798, 799-800, 801-802, 803-804, 805-806, 807-808, 809-810, 811-812, 813-814, 815-816, 817-818, 819-820, 821-822, 823-824, 825-826, 827-828, 829-830, 831-832, 833-834, 835-836, 837-838, 839-840, 841-842, 843-844, 845-846, 847-848, 849-850, 851-852, 853-854, 855-856, 857-858, 859-860, 861-862, 863-864, 865-866, 867-868, 869-870, 871-872, 873-874, 875-876, 877-878, 879-880, 881-882, 883-884, 885-886, 887-888, 889-890, 891-892, 893-894, 895-896, 897-898, 899-900, 901-902, 903-904, 905-906, 907-908, 909-910, 911-912, 913-914, 915-916, 917-918, 919-920, 921-922, 923-924, 925-926, 927-928, 929-930, 931-932, 933-934, 935-936, 937-938, 939-940, 941-942, 943-944, 945-946, 947-948, 949-950, 951-952, 953-954, 955-956, 957-958, 959-960, 961-962, 963-964, 965-966, 967-968, 969-970, 971-972, 973-974, 975-976, 977-978, 979-980, 981-982, 983-984, 985-986, 987-988, 989-990, 991-992, 993-994, 995-996, 997-998, 999-1000, 1001-1002, 1003-1004, 1005-1006, 1007-1008, 1009-1010, 1011-1012, 1013-1014, 1015-1016, 1017-1018, 1019-1020, 1021-1022, 1023-1024, 1025-1026, 1027-1028, 1029-1030, 1031-1032, 1033-1034, 1035-1036, 1037-1038, 1039-1040, 1041-1042, 1043-1044, 1045-1046, 1047-1048, 1049-1050, 1051-1052, 1053-1054, 1055-1056, 1057-1058, 1059-1060, 1061-1062, 1063-1064, 1065-1066, 1067-1068, 1069-1070, 1071-1072, 1073-1074, 1075-1076, 1077-1078, 1079-1080, 1081-1082, 1083-1084, 1085-1086, 1087-1088, 1089-1090, 1091-1092, 1093-1094, 1095-1096, 1097-1098, 1099-1100, 1101-1102, 1103-1104, 1105-1106, 1107-1108, 1109-1110, 1111-1112, 1113-1114, 1115-1116, 1117-1118, 1119-1120, 1121-1122, 1123-1124, 1125-1126, 1127-1128, 1129-1130, 1131-1132, 1133-1134, 1135-1136, 1137-1138, 1139-1140, 1141-1142, 1143-1144, 1145-1146, 1147-1148, 1149-1150, 1151-1152, 1153-1154, 1155-1156, 1157-1158, 1159-1160, 1161-1162, 1163-1164, 1165-1166, 1167-1168, 1169-1170, 1171-1172, 1173-1174, 1175-1176, 1177-1178, 1179-1180, 1181-1182, 1183-1184, 1185-1186, 1187-1188, 1189-1190, 1191-1192, 1193-1194, 1195-1196, 1197-1198, 1199-1200, 1201-1202, 1203-1204, 1205-1206, 1207-1208, 1209-1210, 1211-1212, 1213-1214, 1215-1216, 1217-1218, 1219-1220, 1221-1222, 1223-1224, 1225-1226, 1227-1228, 1229-1230, 1231-1232, 1233-1234, 1235-1236, 1237-1238, 1239-1240, 1241-1242, 1243-1244, 1245-1246, 1247-1248, 1249-1250, 1251-1252, 1253-1254, 1255-1256, 1257-1258, 1259-1260, 1261-1262, 1263-1264, 1265-1266, 1267-1268, 1269-1270, 1271-1272, 1273-1274, 1275-1276, 1277-1278, 1279-1280, 1281-1282, 1283-1284, 1285-1286, 1287-1288, 1289-1290, 1291-1292, 1293-1294, 1295-1296, 1297-1298, 1299-1300, 1301-1302, 1303-1304, 1305-1306, 1307-1308, 1309-1310, 1311-1312, 1313-1314, 1315-1316, 1317-1318, 1319-1320, 1321-1322, 1323-1324, 1325-1326, 1327-1328, 1329-1330, 1331-1332, 1333-1334, 1335-1336, 1337-1338, 1339-1340, 1341-1342, 1343-1344, 1345-1346, 1347-1348, 1349-1350, 1351-1352, 1353-1354, 1355-1356, 1357-1358, 1359-1360, 1361-1362, 1363-1364, 1365-1366, 1367-1368, 1369-1370, 1371-1372, 1373-1374, 1375-1376, 1377-1378, 1379-1380, 1381-1382, 1383-1384, 1385-1386, 1387-1388, 1389-1390, 1391-1392, 1393-1394, 1395-1396, 1397-1398, 1399-1400, 1401-1402, 1403-1404, 1405-1406, 1407-1408, 1409-1410, 1411-1412, 1413-1414, 1415-1416, 1417-1418, 1419-1420, 1421-1422, 1423-1424, 1425-1426, 1427-1428, 1429-1430, 1431-1432, 1433-1434, 1435-1436, 1437-1438, 1439-1440, 1441-1442, 1443-1444, 1445-1446, 1447-1448, 1449-1450, 1451-1452, 1453-1454, 1455-1456, 1457-1458, 1459-1460, 1461-1462, 1463-1464, 1465-1466, 1467-1468, 1469-1470, 1471-1472, 1473-1474, 1475-1476, 1477-1478, 1479-1480, 1481-1482, 1483-1484, 1485-1486, 1487-1488, 1489-1490, 1491-1492, 1493-1494, 1495-1496, 1497-1498, 1499-1500, 1501-1502, 1503-1504, 1505-1506, 1507-1508, 1509-1510, 1511-1512, 1513-1514, 1515-1516, 1517-1518, 1519-1520, 1521-1522, 1523-1524, 1525-1526, 1527-1528, 1529-1530, 1531-1532, 1533-1534, 1535-1536, 1537-1538, 1539-1540, 1541-1542, 1543-1544, 1545-1546, 1547-1548, 1549-1550, 1551-1552, 1553-1554, 1555-1556, 1557-1558, 1559-1560, 1561-1562, 1563-1564, 1565-1566, 1567-1568, 1569-1570, 1571-1572, 1573-1574, 1575-1576, 1577-1578, 1579-1580, 1581-1582, 1583-1584, 1585-1586, 1587-1588, 1589-1590, 1591-1592, 1593-1594, 1595-1596, 1597-1598, 1599-1600, 1601-1602, 1603-1604, 1605-1606, 1607-1608, 1609-1610, 1611-1612, 1613-1614, 1615-1616, 1617-1618, 1619-1620, 1621-1622, 1623-1624, 1625-1626, 1627-1628, 1629-1630, 1631-1632, 1633-1634, 1635-1636, 1637-1638, 1639-1640, 1641-1642, 1643-1644, 1645-1646, 1647-1648, 1649-1650, 1651-1652, 1653-1654, 1655-1656, 1657-1658, 1659-1660, 1661-1662, 1663-1664, 1665-1666, 1667-1668, 1669-1670, 1671-1672, 1673-1674, 1675-1676, 1677-1678, 1679-1680, 1681-1682, 1683-1684, 1685-1686, 1687-1688, 1689-1690, 1691-1692, 1693-1694, 1695-1696, 1697-1698, 1699-1700, 1701-1702, 1703-1704, 1705-1706, 1707-1708, 1709-1710, 1711-1712, 1713-1714, 1715-1716, 1717-1718, 1719-1720, 1721-1722, 1723-1724, 1725-1726, 1727-1728, 1729-1730, 1731-1732, 1733-1734, 1735-1736, 1737-1738, 1739-1740, 1741-1742, 1743-1744, 1745-1746, 1747-1748, 1749-1750, 1751-1752, 1753-1754, 1755-1756, 1757-1758, 1759-1760, 1761-1762, 1763-1764, 1765-1766, 1767-1768, 1769-1770, 1771-1772, 1773-1774, 1775-1776, 1777-1778, 1779-1780, 1781-1782, 1783-1784, 1785-1786, 1787-1788, 1789-1790, 1791-1792, 1793-1794, 1795-1796, 1797-1798, 1799-1800, 1801-1802, 1803-1804, 1805-1806, 1807-1808, 1809-1810, 1811-1812, 1813-1814, 1815-1816, 1817-1818, 1819-1820, 1821-1822, 1823-1824, 1825-1826, 1827-1828, 1829-1830, 1831-1832, 1833-1834, 1835-1836, 1837-1838, 1839-1840, 1841-1842, 1843-1844, 1845-1846, 1847-1848, 1849-1850, 1851-1852, 1853-1854, 1855-1856, 1857-1858, 1859-1860, 1861-1862, 1863-1864, 1865-1866, 1867-1868, 1869-1870, 1871-1872, 1873-1874, 1875-1876, 1877-1878, 1879-1880, 1881-1882, 1883-1884, 1885-1886, 1887-1888, 1889-1890, 1891-1892, 1893-1894, 1895-1896, 1897-1898, 1899-1900, 1901-1902, 1903-1904, 1905-1906, 1907-1908, 1909-1910, 1911-1912, 1913-1914, 1915-1916, 1917-1918, 1919-1920, 1921-1922, 1923-1924, 1925-1926, 1927-1928, 1929-1930, 1931-1932, 1933-1934, 1935-1936, 1937-1938, 1939-1940, 1941-1942, 1943-1944, 1945-1946, 1947-1948, 1949-1950, 1951-1952, 1953-1954, 1955-1956, 1957-1958, 1959-1960, 1961-1962, 1963-1964, 1965-1966, 1967-1968, 1969-1970, 1971-1972, 1973-1974, 1975-1976, 1977-1978, 1979-1980, 1981-1982, 1983-1984, 1985-1986, 1987-1988, 1989-1990, 1991-1992, 1993-1994, 1995-1996, 1997-1998, 1999-2000, 2001-2002, 2003-2004, 2005-2006, 2007-2008, 2009-2010, 2011-2012, 2013-2014, 2015-2016, 2017-2018, 2019-2020, 2021-2022, 2023-2024, 2025-2026, 2027-2028, 2029-2030, 2031-2032, 2033-2034, 2035-2036, 2037-2038, 2039-2040, 2041-2042, 2043-2044, 2045-2046, 2047-2048, 2049-2050, 2051-2052, 2053-2054, 2055-2056, 2057-2058, 2059-2060, 2061-2062, 2063-2064, 2065-2066, 2067-2068, 2069-2070, 2071-2072, 2073-2074, 2075-2076, 2077-2078, 2079-2080, 2081-2082, 2083-2084, 2085-2086, 2087-2088, 2089-2090, 2091-2092, 2093-2094, 2095-2096, 2097-2098, 2099-2100, 2101-2102, 2103-2104, 2105-2106, 2107-2108, 2109-2110, 2111-2112, 2113-2114, 2115-2116, 2117-2118, 2119-2120, 2121-2122, 2123-2124, 2125-2126, 2127-2128, 2129-2130, 2131-2132, 2133-2134, 2135-2136, 2137-2138, 2139-2140, 2141-2142, 2143-2144, 2145-2146, 2147-2148, 2149-2150, 2151-2152, 2153-2154, 2155-2156, 2157-2158, 2159-2160, 2161-2162, 2163-2164, 2165-2166, 2167-2168, 2169-21



First Homes

Shared Ownership

Affordable Rent



KEY

AFFORDABLE UNITS

Affordable

SALE UNITS

Private

RM4								
Indicative Registered Provider Tenure Mix								
Bedrooms	No. of HA Units	%	First Homes (25%)	%	Affordable Rent (67%)	%	Intermediate (8%)	%
1 Bed apartment	12	11.1%	0	0.0%	12	16.7%	0	0.0%
2 Bed apartment	12	56.5%	0	100.0%	12	45.8%	0	11.1%
2 Bed house	49		27		21		1	
3 Bed house	27	35.2%	0	0.0%	23	9.0%	4	44.4%
4 Bed house	8	7.4%	0	0.0%	4	5.6%	4	44.4%
Total	108		27	25.0%	72	66.7%	9	8.3%

Project

PHASE 4, THE LANDINGS
FORD, WEST SUSSEX

Client

VISTRY SOUTH EAST

Drawing

PHASE 4
PROPOSED HOUSING TENURE PLAN - A

Drawing no.

22.1706.2060

Rev.

C

Scale

1:1000

Date

AUG 24

Drawn

CLP

Checked

CH

finc

Finc Architects Ltd
11-15 New London Road / Chichester / Sussex / PO19 1SD
T: +44 (0)1243 820000
E: info@fincarchitects.co.uk
W: www.fincarchitects.co.uk

Disclaimer

© Finc Architects Limited holds the copyright to all the information contained within this document and their entire content shall be retained before copying or using the data other than for the purpose it was originally supplied.
All dimensions and measurements are to be checked on site.
Do not scale from this drawing. This drawing is to be printed in colour.

PLANNING WIP

SCALE 1:1000

Indicative Community Base Tenure Mix								
Bedrooms	No. of the flats	%	First Homes (25%)	%	Affordable Rented (37%)	%	Intermediate + (38%)	%
1 Bed apartment	12	29.7%	0	0.0%	12	29.3%	0	0.0%
2 Bed apartment	12		0		12		0	
2 Bed house	49	56.5%	27	100.0%	17	73.7%	5	12.5%
3 Bed house	27	46.6%	0	0.0%	0	0.0%	27	67.5%
4 Bed house	8	13.8%	0	0.0%	0	0.0%	8	20.0%
Total	108		27	25.0%	41	38.0%	40	37.0%

Table 1 Inductive Blackboard Provider To note life								
Bedrooms	No. of the Units	%	First Floor (25%)	%	After-school Feed (67%)	%	Intermediate (65%)	%
1 Bed apartment	12	11.1 %	0	0.0 %	12	16.7 %	0	0.0 %
2 Bed apartment	12		0		12		0	
		56.5 %	27	100.0 %	21	45.8 %	1	11.1 %
2 Bed house	49							
	27	35.2 %	0	0.0 %	23	9.0 %	4	44.4 %
3 Bed house	27							
	8	7.4 %	0	0.0 %	4	5.6 %	4	44.4 %
4 Bed house	8							
Total	108		27	25.0 %	72	66.7 %	5	5.3 %