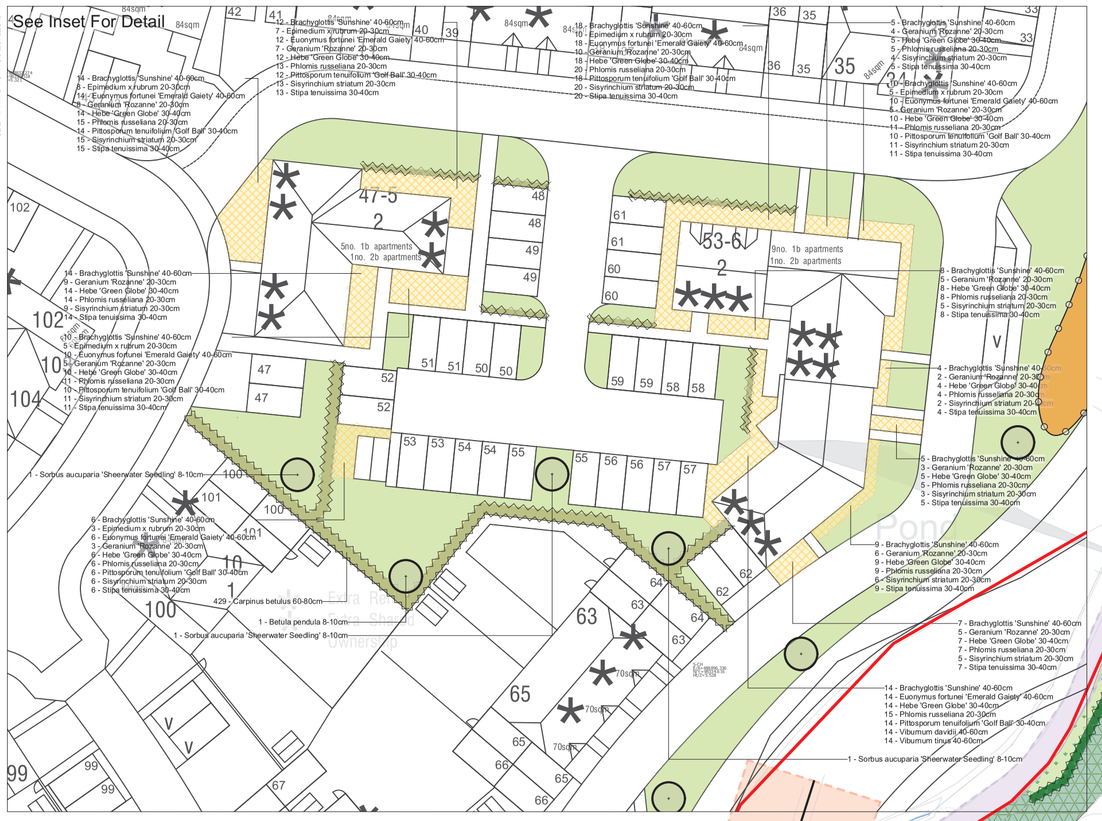

27 - Acer campestre 60-80cm
27 - Cornus sanguinea 60-80cm
27 - Corylus avellana 60-80cm
134 - Crataegus monogyna 60-80cm
27 - Prunus spinosa 60-80cm
27 - Rosa canina 60-80cm

1 - Acer campestre 'Streetwise' 16-18cm

1 - Acer campestre 'Streetwise' 16-18cm

1 - Betula pubescens 8-10cm

30 - Acer campestre 60-80cm
30 - Cornus sanguinea 60-80cm
30 - Corylus avellana 60-80cm
149 - Crataegus monogyna 60-80cm
30 - Prunus spinosa 60-80cm
30 - Rosa canina 60-80cm

1 - Acer campestre 16-18cm

95 - Carpinus betulus

1 - Betula pendula 12-14cm

87 - Mixed Narcissus
87 - Galanthus nivalis
87 - Crocus vernus
87 - Hyacinthoides non-scripta
87 - Galanthus nivalis

25 - Brachyglottis 'Sunshine'
25 - Euonymus fortunei 'Emerald Gaiety'
25 - Hebe 'Green Globe'
28 - Phlomis russeliana
25 - Pittosporum tenuifolium 'Golf Ball'
25 - Viburnum davidii
25 - Viburnum tinus

1 - Sorbus aucuparia 'Sheerwater Seedling' 16-18cm

44 - Mixed Narcissus
44 - Galanthus nivalis
44 - Crocus vernus
44 - Hyacinthoides non-scripta
44 - Galanthus nivalis

1 - Acer campestre 'Streetwise' 8-10cm

2 - Prunus avium 'Plena' 8-10cm

1 - Sorbus aucuparia 20-25cm

1 - Sorbus aucuparia 20-25cm

1 - Tilia cordata 'Greenspire' 12-14cm

1 - Pyrus calleryana 'Chanticleer' 16-18cm

76 - Mixed Narcissus
76 - Galanthus nivalis
76 - Crocus vernus
76 - Hyacinthoides non-scripta
76 - Galanthus nivalis

1 - Sorbus aucuparia 'Sheerwater Seedling' 16-18cm

18 - Acer campestre 60-80cm
18 - Cornus sanguinea 60-80cm
18 - Corylus avellana 60-80cm
90 - Crataegus monogyna 60-80cm
18 - Prunus spinosa 60-80cm
18 - Rosa canina 60-80cm

1 - Carpinus betulus 'Fastigata' 12-14cm

29 - Mixed Narcissus
29 - Galanthus nivalis
29 - Crocus vernus
29 - Hyacinthoides non-scripta
29 - Galanthus nivalis

See Inset For Detail

1 - Carpinus betulus 'Fastigata' 8-10cm

18 - Acer campestre 60-80cm
18 - Cornus sanguinea 60-80cm
18 - Corylus avellana 60-80cm
89 - Crataegus monogyna 60-80cm
18 - Prunus spinosa 60-80cm
18 - Rosa canina 60-80cm

1 - Acer campestre 'Streetwise' 8-10cm

100 - Acer campestre 60-80cm
100 - Cornus sanguinea 60-80cm
100 - Corylus avellana 60-80cm
500 - Crataegus monogyna 60-80cm
100 - Prunus spinosa 60-80cm
100 - Rosa canina 60-80cm

55 - Mixed Narcissus
55 - Galanthus nivalis
55 - Crocus vernus
55 - Hyacinthoides non-scripta
55 - Galanthus nivalis

1 - Pyrus calleryana 'Chanticleer' 16-18cm

7 - Acer campestre 60-80cm
7 - Cornus sanguinea 60-80cm
7 - Corylus avellana 60-80cm
34 - Crataegus monogyna 60-80cm
7 - Prunus spinosa 60-80cm
7 - Rosa canina 60-80cm

2 - Sorbus aucuparia 'Sheerwater Seedling' 16-18cm

58 - Mixed Narcissus
58 - Galanthus nivalis
58 - Crocus vernus
58 - Hyacinthoides non-scripta
58 - Galanthus nivalis

1 - Betula pendula 8-10cm

2 - Betula pubescens 12-14cm

1 - Acer campestre 'Streetwise' 16-18cm

1 - Sorbus aucuparia 12-14cm

1 - Pyrus calleryana 'Chanticleer' 20-25cm

1 - Sorbus aucuparia 'Sheerwater Seedling' 8-10cm

1 - Prunus avium 'Plena' 8-10cm

1 - Carpinus betulus 'Fastigata' 8-10cm

1 - Acer campestre 'Streetwise' 12-14cm

NOTES

This drawing is the property of FPCR Environment and Design Ltd and is issued on the condition it is not reproduced, retained or disclosed to any unauthorised person, either wholly or in part without written consent of FPCR Environment and Design Ltd.

Ordnance Survey base mapping - supplied by client.

0 10 20 30 40m

N

KEY

- Site Boundary
- Existing Vegetation to be Retained
- Existing Vegetation to be Removed
- Proposed Drainage Easements (see drainage drawings D1915-PL302i Proposed FW & SW Drainage Strategy (South) Sht 1 & 2 and (North) Sht 1 & 2)
- Existing Ditch Easements (3m offset from top of bank)
- Proposed SUDs Pond Easements (3m offset from the top of bank)
- Overhead Cables (8m easement no tree planting within)
- Headwalls
- Play Area
- Native Woodland Planting
- Native Shrub Planting
- Individual Semi-mature Trees
- Individual Extra Heavy StandardTrees
- Individual Heavy StandardTrees
- Individual StandardTrees
- Orchard Trees
- Triple Staggered Native Hedgerows
- Double Staggered Native Hedgerows
- Single Species Hedgerows
- Amenity Grassland (to be Naturescape NL4 'Hardwearing Lawn Mixture' or similar approved)
- Meadow Grassland (to be Naturescape N1 'General Purpose Meadow Mixture' or similar approved)
- Wetland Grassland (to be Naturescape N7 'Wetland Meadow Mixture' or similar approved)
- Areas to hold permanent water
- Amenity Planting Mix
- Bulb Planting within Long Grass Areas
- Allotments

For planting schedule and notes see 10095-FPCR-XX-XX-DR-L-0015

rev	date	description	drn	chk
P05	13/10/2023	Label removed from plan	PIM	TCM
P04	12/10/2023	Changed tree sizes added fencing	SDO	TCM
P03	26/09/2023	New layout + amendemnts from comments.	SDO	TCM
P02	31.07.2023	Updates based on comments	CC	TCM
P01	18.07.2023	First Issue	CC	TCM

masterplanning
environmental assessment
landscape design
urban design
ecology
architecture
arboriculture

FPCR Environment and Design Ltd
Lockington Hall
Lockington
Derby
DE74 2RH

t: 01509 672772
e: mail@fpcr.co.uk
w: www.fpcr.co.uk

client
Foreman Homes

project
Land West of Pagham Road,
Pagham

drawing title
DETAILED POS LANDSCAPE PROPOSALS
(Sheet 1 of 5)

scale	drn	chk	date created
1:500 @ A1	CC	TCM	18 July 2023

project number	status	issue
10095	S3	P05

document number
10095-FPCR-XX-XX-DR-L-0016
Project Code - Originator - Zone - Level - Type - Role - Drawing Number

File: \\FPCR-FS-01\Projects2\10000\10095\LAND\Drawings\10095 - Planting Plan POS P05.vwx